



# VØRUKATALOG

## PRODUCT CATALOG

2024



**HYDRAULIK**  
POWER & MOTION CONTROL





# UM KJ

## ABOUT KJ

Síðani stovnan felagsins í 1978, hevur KJ havt støðugan vökstur og staðið í menning. Við umleið 150 starvsfólkum, sjey deildum í Føroyum og Danmark, umframta einum vaksandi kundaskarða í Føroyum, Íslandi, Hetlandi og Noregi, er KJ ein áltandi og viðurkendur veitari í Norðuratlantshavinum.

Fyritøka okkara, KJ, staðfestur styrki í útinnandi trúfesti til góðsku og framburð. Vit standa trúføst í vinnuni, ikki einans í okkara eginleika at veita hágóðsku vørur og tænastur, men eisini tí, at okkara lyfti er, at veita trivnaðarfremjandi arbeiðsumhvørvi, ið eggjar til besta avrik frá okkara starvsfólkí.

Fyri okkum er starvsfólk okkara grundarsteinurin undir okkara virksemi. Tískil er okkara vökstur og menning treytað av teirra eydnu. Við at gera ílögur í okkara starvsmægi og við at menna okkara starvmentan, vaksa vit um nýhugsan, samstarv og áhaldandi lærdom, samstundis sum vit ferð eftir ferð liva upp til krövini, ið vinnan setur okkum.

KJ er ein dynamisk fyritøka við einum sterkum toymi, ið arbeiða innan tríggjar høvuðsgeirar. Fyritøkan er væl umboðað í sjóvinnuni, har vit spæla ein týdningarmiklan leiklut í flutningi, goymslu og tilhoyrandi tænastum. Harafturat er KJ á serstakari rók í alivinnuni har dentur verður settur á hágóðsku framleiðslu og arbeiðslag. Okkara virksemi á landi, er triði høvuðsgeirin. Her veita vit maskinur innan byggivinnuna og tilhoyrandi lutir.

Since its foundation in 1978, KJ has witnessed substantial growth and development. With roughly 150 staff members, 7 departments in the Faroe Islands and Denmark and a growing clientele in the Faroe Islands, Iceland, Shetland and Norway, KJ is a well-established and trusted supplier in the North Atlantic.

Our company, KJ, stands as a testament to the power of unwavering commitment to quality and the pursuit of excellence. We owe our prominence in the industry to not only our ability to deliver superior products and services but also our pledge to foster a work environment that encourages peak performance from our dedicated team.

We believe that our employees are the backbone of our enterprise, and their growth and development are integral to our overall success. By investing in our workforce and cultivating a culture that values innovation, collaboration, and continual learning, we are able to consistently meet and exceed industry standards.

KJ is a diversified business entity with a robust operational framework that spans across three major sectors. The company has a significant presence in the Maritime sector, playing a vital role in shipping, logistics, and maritime services. Additionally, KJ has carved out a substantial niche for itself in aquaculture, focusing on sustainable fish farming practices and contributing to the stability of food resources. Lastly, the industrial activities on land comprise the third pillar of KJ's operations, with the company engaging in construction machinery, logistics equipment and various industrial services.



# GOYMSLAN

## THE WAREHOUSE

KJ er sum veitari sera errin av, og raðfestur høgt, at hava eina sterka goymslu. Við meir enn 25.000 ymiskum vørum til vinnuna, eru vit klár at liva upp til krøv frá okkara kundum. Harvið tryggja vit, at vit eru ein viðspælari til vinnuna. Um ein kundi ynskir eina vóru, ið ikki er á goymslu í tí lótu, hon verður umbiðin, leypur okkara sterka toymi heilhjartað í aktión. Har verður okkara serkunnleiki prógvæður og okkara sterka netverk gagnnýtt. Á hendan hátt stytta vit um bíðtíðina hjá kundanum.

Harafturat er söludeildin hjá KJ mannað av dugnaligum sölufólki, ið altið er klár at hjálpa og ráðgeva, soleiðis at kundin fær júst tað, honum tørvar. Okkara serkunnleiki er innan eitt sera stórt úrval av vørum, og prógvær hetta, at okkara netverk og okkara arbeiðsmegi er inngrógvinn í okkara tænastu.

Um tú hefur ein fyrisþurning, skalt tú vera hjartaliga vælkomin at ringja til okkara sölubúð ella at ringja til sölutoymið, beinleiðis á +298 40 70 00. Eisini ert tú vælkomin at senda teldupost á soludeild@kj.fo. Eitt sölufólk verður skjótt sett á sakina, so tú fært tín tørv nøktaðan.

KJ prides itself on an extensive and diverse inventory that encompasses an impressive array of over 25,000 unique items tailored to the maritime industry. Our store is fully stocked to meet the immediate needs of our customers, ensuring that we serve as a one-stop shop for maritime supplies. If, on the rare occasion, a client requires a product that is not readily available in our inventory, our dedicated team springs into action, utilizing their expertise and extensive network to procure the item posthaste, thereby minimizing any potential downtime for our customers.

Furthermore, KJ's sales department is staffed by skilled sales engineers and they are prepared and eager to assist in the selection process, ensuring that every customer finds precisely what they require for their maritime operations. Our capacity to procure a vast range of products is a testament to the robust connections and resourcefulness embedded in our service ethos.

For any inquiries or specialized service requests, customers are encouraged to reach out to our store or contact the sales department directly at +298 40 70 00, or send an email to sales@kj.fo. A sales engineer will promptly engage with you to facilitate your needs.

**Tel** +298 40 70 00  
**T-post** soludeild@kj.fo

**Bústaður**  
Fagragil 2  
530 Kambsdalur  
Føroyar

**Tel** +298 40 70 00  
**E-mail** sales@kj.fo

**Address**  
Fagragil 2  
530 Kambsdalur  
Faroe Islands





**INNIGHALDSYVIRLIT**


TABLE OF CONTENTS



# INNIGHALDSYVIRLIT

## TABLE OF CONTENTS

<b>INDISTRISLANGUR</b> INDUSTRIAL HOSES	<b>9</b>	<b>SEPERATORAR</b> SEPARATORS	<b>53</b>
<b>FISKASLANGUR OG FITTINGS</b> FISH PUMP HOSES AND FITTINGS	<b>21</b>	<b>LUFT</b> PNEUMATICS	<b>55</b>
<b>HYDRAULIKKSLANGUR</b> HYDRAULIC HOSES	<b>25</b>	<b>KEMIKALIIR</b> CHEMICALS	<b>59</b>
<b>RØR- OG SLANGUFITTINGS, HYDRAULIKKUR</b> PIPE AND HOSE FITTINGS, HYDRAULICS	<b>29</b>	<b>KEMI</b> CHEMISTRY	<b>63</b>
<b>FILTUR OG FILTURHÚSAR</b> FILTERS AND FILTER HOUSINGS	<b>33</b>	<b>RØR- OG SLANGULEMMUR</b> TUBE AND HOSE CLAMPS	<b>69</b>
<b>HYDRAULISKAR PUMPUR OG MOTORAR</b> HYDRAULIC PUMPS AND MOTORS	<b>39</b>	<b>RØRFITTINGS</b> TUBE FITTINGS	<b>73</b>
<b>VATNPUMPUR</b> WATER PUMPS	<b>43</b>	<b>RØR</b> TUBES	<b>77</b>
<b>LEGUR OG TRANSMISSIONIR</b> BEARINGS AND TRANSMISSIONS	<b>47</b>		
<b>INDUSTRI- VENTILAR</b> INDUSTRY VALVES	<b>49</b>	<b>ALFABETISKT INNIGHALDSYVIRLIT</b> TABLE OF CONTENTS IN ALPHABETICAL ORDER	<b>81</b>

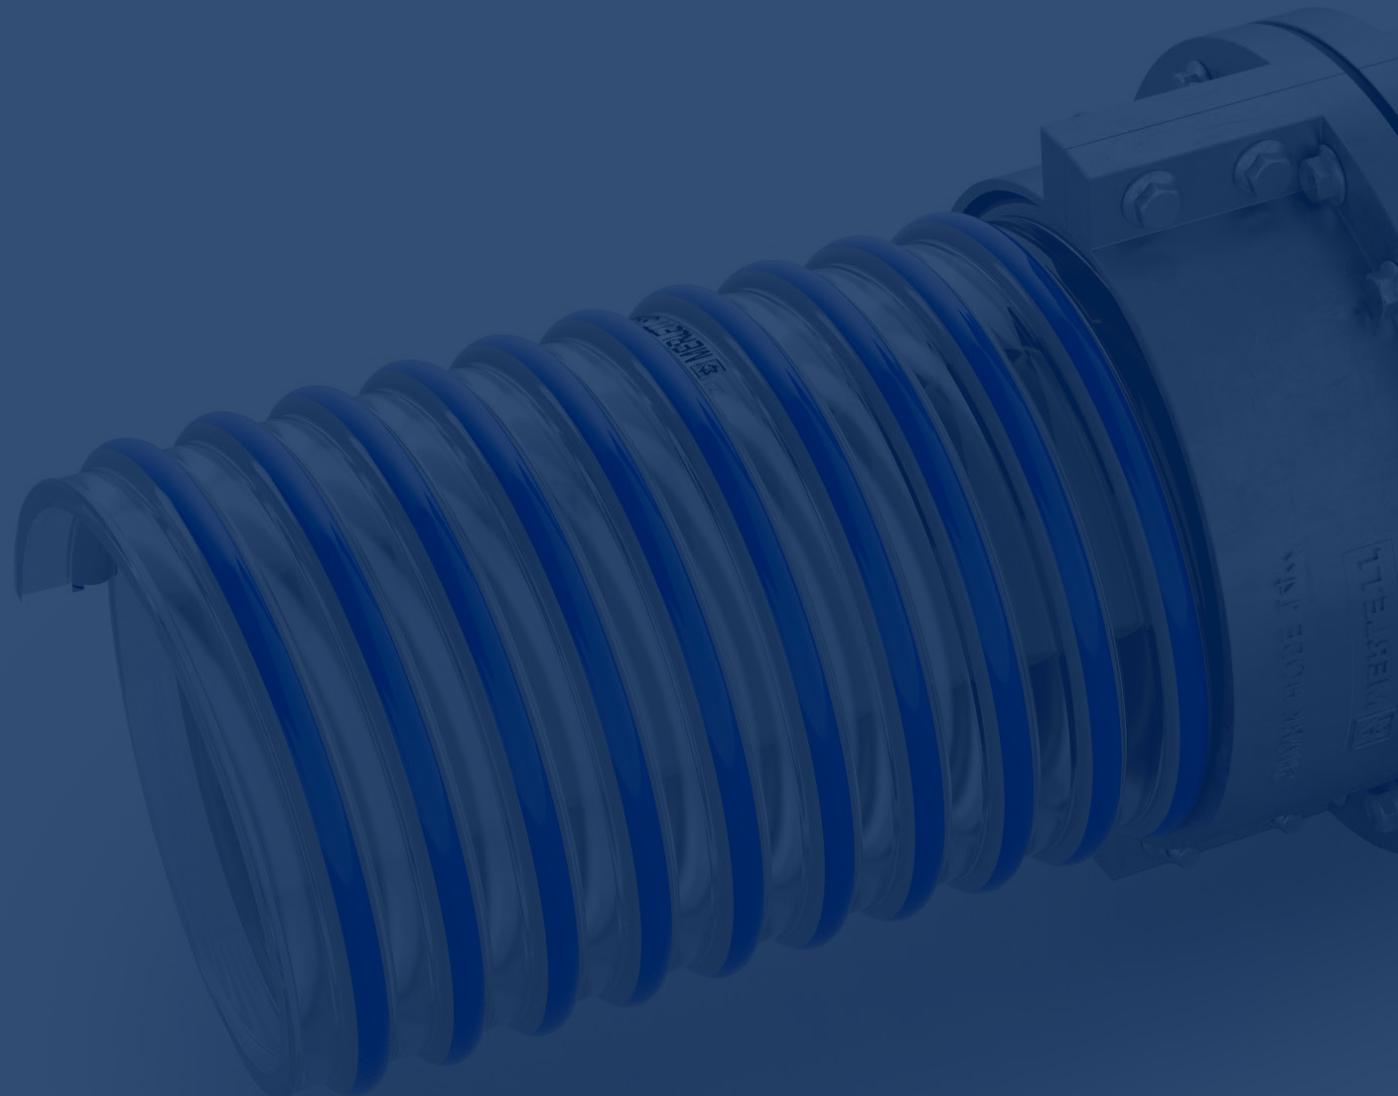



A large, blue, ribbed industrial hose is coiled around a dark metal flange. The hose has printed text on its side: 'HERMET SHARK HOSE -25°C +55°C MADE IN ITALY'. The background is a solid dark blue.

# INDUSTRISLANGUR

## INDUSTRIAL HOSES



# LUISIANA SUPERELASTICS

LUISIANA SUPERELASTICS

Spiralsúgvislanga úr PVC plasti, við stívum PVC spirali. Til gjøgnumrenning og súgving av ymiskari vætu. Fæst bæði við hvítum og grønum spirali. Slangan er klár og glött innvendiga.

PVC hose with rigid PVC spiral, for delivery and suction of liquids. Available in both white and green spiral. The hose is transparent and smooth surface inside.



Ø NOMINAL Ø NOMINAL	Ø NOMINAL Ø NOMINAL	INNARI DIAMETUR Ø I.D.	UTTARI DIAMETUR Ø O.D.	ARBEIDSTRYST WORKING PRESSUR	VAKUUM VACUUM	BRESTITPUNKT BURSTING PRESS.	TOTAL TIJKT TOTAL THICKNESS	VEKTMETUR WEIGHT METER
mm	inch	mm	mm	bar	m/H <sub>2</sub> O	bar	mm	g/m
19		19	24,6	6,5	7	19,5	2,8	250
20		20	26,2	6,5	7	19,5	3,1	275
25	1	25	31,6	6,5	7	19,5	3,3	330
30		30	37	5,5	7	16,5	3,5	420
32	1 1/4	32	39,2	5,5	7	16,5	3,6	460
35		35	41,8	5	7	15	3,4	500
38	1 1/2	38	45,4	4,5	7	13,5	3,7	550
40		40	47,8	4,5	7	13,5	3,9	610
45	1 3/4	45	52,8	4	7	12	3,9	670
50	2	50	58,2	3,5	7	10,5	4,1	810
51	2	51,3	59,5	3,5	7	10,5	4,1	810
55		55	63,6	3,5	7	10,5	4,3	860
60		60	69	3,5	7	10,5	4,5	970
63	2 1/2	63	71,2	3,5	7	10,5	4,1	1040
70		70	79	3,5	7	10,5	4,5	1200
75		75	85,4	2,5	7	7,5	5,2	1380
76	3	76	86	2,5	7	7,5	5	1380
80		80,2	90,8	2,5	7	7,5	5,3	1560
90	3 1/2	90	100,4	2,5	7	7,5	5,2	1800
100		100	112	2,5	7	7,5	6	2160
102	4	102,3	113,9	2,5	7	7,5	5,8	2200
110		110	122	2,5	5	7,5	6	2400
120		120	132,4	2,5	5	7,5	6,2	2850
125		125	137,6	2	5	6	6,3	3130
127	5	127	140,6	2	5	6	6,8	3130
150		150	164,4	2	5	6	7,2	4250
152	6	152,4	167,2	2	5	6	7,4	4250
200		200	218,2	1	5	3	9,1	6400
204	8	203,2	221,2	1	5	3	9	6400

**Notes:**

Bending radius: According to UNI EN ISO 10619- 1, A1.

## OREGON PU PS REYÐ

### OREGON PU PS RED

Spiralsúgvislanga við reyðum PVC spirali. Verður mest nýtt til fiskaflutning. Slangan er klár og gløtt innvendiga.

Spiral hose with PVC-made spiral in red. Mostly used for transport of fish. The hose is transparent and smooth surface inside.



## OREGON PU PS BLÁ

### OREGON PU PS BLUE

Spiralsúgvislanga við bláum PVC spirali. Verður mest nýtt til fiskaflutning. Slangan er klár og gløtt innvendiga.

Spiral hose with PVC-made spiral in blue. Mostly used for transport of fish. The hose is transparent and smooth surface inside.



Ø NOMINAL Ø NOMINAL		Ø NOMINAL Ø NOMINAL		INNARI DIAMETUR Ø I.D.	UTTARI DIAMETUR Ø O.D.	ARBEIDSTRÝST WORKING PRESSURE	VAKUUM VACUUM	TOTAL TJÜKT TOTAL THICKNESS	TJÜKT Á VEGGI MIN DEPTH PU	VEKTMETUR WEIGHT METER
mm	inch	mm	mm	bar	m/H <sub>2</sub> O	mm	mm	mm	g/m	
51	2	51,2	60,7	1,5 (*)	6 (*)	4,8	0,8	600		
63	2 1/2	62,5	71,3	1,3 (*)	5,5 (*)	4,4	0,8	680		
76	3	76,6	86,4	1,3 (*)	5,5 (*)	4,9	0,8	800		
89	3 1/2	89,7	100,7	1,3 (*)	5,5 (*)	5,5	0,8	1120		
102	4	102,8	114,8	1	5 (*)	6	0,9	1200		
110		110	122	1	5 (*)	6	1	1270		
127	5	128	142	1	5 (*)	7	0,8	1800		
152	6	152,2	165,8	0,7	4,5 (*)	6,8	0,6	2000		
160		160	176	0,7	4,5 (*)	8	1	2250		
200		200	216,2	0,5	4 (*)	8,1	0,9	3100		
203	8	203	220,2	0,5	4 (*)	8,6	1	3300		
250		250	270,6	0,3	4 (*)	10,3	1,7	3900		

**Notes:**

Working and bursting pressure: according to ISO 1402  
Bending radius at 23°C: According to UNI EN ISO 10619-1, A1

Ø NOMINAL Ø NOMINAL		Ø NOMINAL Ø NOMINAL		INNARI DIAMETUR Ø I.D.	UTTARI DIAMETUR Ø O.D.	ARBEIDSTRÝST WORKING PRESSURE	VAKUUM VACUUM	TOTAL TJÜKT TOTAL THICKNESS	TJÜKT Á VEGGI MIN DEPTH PU	VEKTMETUR WEIGHT METER
mm	inch	mm	mm	bar	m/H <sub>2</sub> O	mm	mm	mm	g/m	
50,8	2	50,8	58,8	0,6	4,5	4	0,8	460		
63,5	2 1/2	63,5	72,5	0,6	4,5	4,5	0,8	580		
76	3	76,2	84,4	0,6	4,5	4,2	0,9	700		
90		90	99,2	0,5	4,5	4,6	0,9	900		
102	4	101,6	111,6	0,5	4,5	5	1	1050		
110		110	121,4	0,5	4	5,7	1	1200		
127	5	127	138,6	0,5	3,5	5,8	1,1	1400		
152	6	152,4	165,4	0,5	2,5	6,5	1,1	1800		
160		160	173,6	0,4	1,5	6,8	1,1	2000		
203	8	203,2	218	0,3	1	7,4	1,2	2700		
254	10	254	270	0,2	1	8	1,7	3900		
305	12	305	321	0,2	1	8	2	4800		

**Notes:**

Working and bursting pressure: according to ISO 1402  
Bending radius at 23°C: According to UNI EN ISO 10619-1, A1



# SUPERFLEX PU R

## SUPERFLEX PU R

PU spiralslanga við styrktum koparspirali. Til gjøgnum-renning av dusti og brýningarevn. Verður nógv nýtt innan súgving av sandi og fóðri. Slangan er klár.

POLYURETHANE (PU) hose with copper-plated steel spiral, for suction and transport of dust, chips and abrasive material. The hose is transparent.




INNARI DIAMETUR Ø NOMINAL	INNARI DIAMETUR Ø NOMINAL	UTTARI DIAMETUR Ø O.D.	VAKUUM VACUUM	TJÜKT Á VEGGI WALL THICKNESS	Ø, STÁLVEIRUR Ø STEEL WIRE	MÁT MILLUM SPIRALAR SPIRAL PITCH	VEKTMETUR WEIGHT METER
mm	mm	mm	m/H <sub>2</sub> O	mm	mm	mm	g/m
30	31	35	5,5	0,5	1	10	140
35	36	40	5	0,5	1	10	160
38	39	43	4,8	0,5	1	9,8	180
40	41	45	4,5	0,5	1	10	200
45	46	50	4	0,5	1	10	220
50	51	55	3,5	0,55	1,2	12	280
55	56	60	3	0,55	1,2	12	300
60	61	65	3	0,55	1,2	12	330
63	64	68	2,5	0,55	1,2	12	350
70	71	77	2,5	0,6	1,4	14	420
75	76	82	2	0,6	1,4	14	440
80	81	87	2	0,6	1,4	14	480
85	86	92	2	0,6	1,4	14	500
90	91	97	2	0,6	1,4	14	520
100	101	107	1,5	0,65	1,6	16	660
110	111	117	1,5	0,65	1,6	16	720
120	121	127	1,5	0,65	1,6	16	780
125	126	132	1,5	0,65	1,6	16	800
128	128,5	134,5	1,5	0,65	1,6	16	820
130	131	137	1,5	0,65	1,6	16	840
140	141	147	1,5	0,65	1,6	16	900
150	151	157	1	0,7	1,8	18	1100
160	161	167	1	0,7	1,8	18	1160
170	171	177	1	0,7	1,8	18	1240
173	173	179	1	0,7	1,8	18	1250
180	181	187	1	0,7	1,8	18	1300
200	201	207	1	0,7	1,8	18	1440
220	221	227	0,5	0,7	1,8	18	1580
225	226	232	0,5	0,7	1,8	18	1620
250	252	259	0,5	0,8	2	22	1880
280	282	289	0,5	0,8	2	22	2100
300	302	309	0,4	0,8	2	22	2250
325	327	334	0,4	0,8	2	22	2450
350	352	359	0,4	0,8	2	22	2600
400	402	409	0,4	0,8	2	22	3000
450	452	459	0,4	0,8	2	22	3350

# SHARK SLANGA

## SHARK HOSE

Spiralsúgvíslanga úr PVC plasti, við stívum og stoyt-dyggum PVC spirali. Verður mest nýtt til fiskaflutning. Slangan er klár og gløtt innvendiga.

PVC hose with PVC rigid shockproof spiral, for fish farming and carrying fish products. The hose is smooth on the inside and transparent.

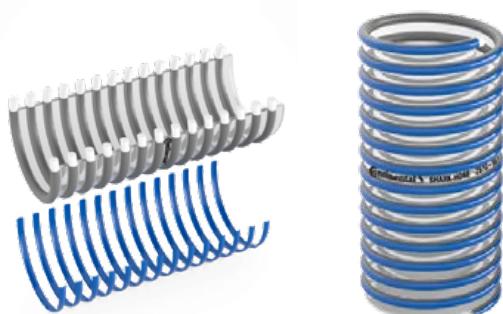

Ø NOMINAL Ø NOMINAL	Ø NOMINAL Ø NOMINAL	INNARI DIAMETUR Ø I.D.	UTTARI DIAMETUR Ø O.D.	ARBEIÐSTRÝST WORKING PRESSURE	VAKUUM VACUUM	BRESTITPUNKT BURSTING PRESS.	TJÚKT Á VEGGI MIN DEPTH PU	VEKTMETUR WEIGHT METER
mm	inch	mm	mm	bar	m/H <sub>2</sub> O	bar	mm	g/m
102	4	101,6	120	2,5	9	7,5	9,2	3250
152	6	152,4	175,4	2	9	6	11,5	5600
203	8	203,2	230	2	9	6	13,5	9200
254	10	254	290	1,5	9	4,5	18	14500
305	12	304,8	344,8	1,5	9	4,5	20	19000
355	14	356	396	1,25	9	3,7	20	22000
407	16	407	450	1	9	3	21,5	28000

### Viðmerkingar/Notes:

Arbeiðs- og brestipunkt: Sambært ISO 1402

Radius á bendi á 23 °C: Sambært UNI EN ISO 10619-1, A1

Vakuum móttstöðuföri: Sambært royndum ILLAB018

Working and bursting pressure: according to ISO 1402  
Bending radius at 23°C: According to UNI EN ISO 10619-1, A1  
Vacuum resistance: According to test method ILLAB018





## JAMAICA HD

### JAMAICA HD

Flatliggjandi slanga úr NBR gummi, við polyester styrkningi. Mótstóðufør móttvegis trýsti frá vætu og oljum.

Flexible layflat NBR hose with polyester yarn reinforcement, resistant to elongation, for pressurized delivery of liquids and oils.



Ø NOMINAL Ø NOMINAL	INNARI DIAMETUR Ø I.D.	ARBEIDSTRÝST WORKING PRESSURE	BRESTIPUNKT BURSTING PRESS.	TOTAL TJÜKT TOTAL THICKNESS	VEKTMETUR WEIGHT METER	BROTSTYRKI TENSILE BREAKING LOAD
mm	mm	bar	bar	mm	g/m	kg
20	20	30	90	min. 2,2	215	1200
22	22	30	90	min. 2,2	230	1200
25	25	30	90	min. 2,1	245	1350
27	27	30	90	min. 2,1	260	1350
32	32	27	80	min. 2,0	310	1900
38	38	21	62	min. 2,1	375	2200
42	42	21	62	min. 2,1	395	2400
45	45	21	62	min. 2,1	395	3300
52	52	17	52	min. 2,0	470	4300
55	55	17	52	min. 2,0	470	4450
63	63	17	52	min. 2,2	600	5100
70	70	17	50	min. 2,2	650	6500
75	75	17	50	min. 2,2	710	7000
78	78	17	50	min. 2,2	710	7200
80	80	15	45	min. 2,2	760	7600
90	90	15	45	min. 2,3	930	9200
102	102	15	45	min. 2,4	1000	10500
104	104	15	45	min. 2,4	1080	10500
110	110	13	40	min. 2,4	1100	11000
115	115	13	35	min. 2,4	1180	11500
125	125	15	45	min. 2,8	1450	14000
150	150	13	35	min. 2,7	1700	16500
156	156	13	35	min. 2,7	1700	16500
204	204	12	35	min. 3,5	3000	20300
254	254	10	28	min. 3,5	3500	24100
304	304	10	26	min. 3,5	3700	30300

# ASPIR PU/H

## ASPIR PU/H

Spiralsúgvislanga við bláum PVC spirali. Bleyt, liðilig og lött at arbeiða við. Slangan er klár og glött innvendiga.

Spiral hose with PVC-made spiral in blue. Soft, flexible and easy to handle. The hose is transparent and smooth inside.



INNARIÐIAMETUR INSIDE DIAMETER	UTTARIÐIAMETUR OUTSIDE DIAMETER	GÓÐSTJÜKT TOTAL THICKNESS BETWEEN SPIRALS SI	VEKT WEIGHT	VINKULRADIUS BENDING RADIUS
mm	mm	mm	kg/m	mm
76	88	1	1,05	220
90	103	1,15	1,26	225
102	115	1,15	1,45	250
110	123	1,15	1,6	270
127	141	1,2	1,8	320
152	167	1,2	2,5	380
160	176	1,2	2,65	400
203	220	1,2	3,5	500
254	274	1,4	5,1	650
305	329	1,5	6,45	750

# FLEXFAB KØLIVATNSSLANGA

## FLEXFAB COOLING WATER HOSE

Kølivatnsslanga úr silikon, við innbygdum nylon. Verður brúkt til kølivatn og hitaanlegg. Toler úr -54 °C upp til 177 °C og 7 bar trýst. KJ hefur úr 8mm upp til 25mm á goymslu.

Cooling water hose made out of silicone, with built-in nylon. Is used in cooling water and heat exchangers. Can manage from -54 °C up to 177 °C and up to 7 bar pressure. KJ keeps from 8mm up to 25mm on stock.

Litur Color	Blátt / Blue
Slangutypa Hose type	1-ply
Arbeiðsrýst Working pressure	7 bar
Trýst hámark Max pressure	20,7 bar
Hitið Temperature	-54°C + 177°C
Tilfar Material	Syntetiskt silikongummi (Q) / Synthetical silicone rubber
Standard Standard	SAE J20 R3 Class A





## ASPIROIL

### ASPIROIL

Aspiroil oljusúgvi-returslanga við innbygdum stálspirali. Kann nýtast til blýfrítt, olju, diesel, feitt, smyrjolju og vatn. Innara lagið er úr NBR og utan lagið er úr kloropren gummi (CR), ið er móttstöðufört ímóti olju- og hitaávirkan. Tolir úr -30 °C upp til 120 °C og 10 bar trýst. KJ veitur úr 3/4" til 3" av hesi slangu.

Aspiroil oil-suction hose with built-in steel spiral. Can be used for petroleum, oil, diesel, fats, lubricants and water. The inner layer is made out of NBR and the outer layer chloropren rubber (CR), which makes it resistant when exposed to oil and heat. Can withstand -30 °C up to 120 °C with 10 bar pressure. KJ keeps from 3/4" up to 3" sizes of this hose on stock.

<b>Tilfar innan</b> Material inside	120°C (vatn) 248 °F (Water), 120 °C (Water)
<b>Tilfar utan</b> Material outside	120°C (vatn) 248 °F (Water), 120 °C (Water)
<b>Hiti</b> Temperature	Syntetiskt gummi Synthetic Rubber
<b>Arbeiðstrýst</b> Working pressure	Dupultflættaður veirur 2 Braids of High Tensile Wire
<b>Hámarkstrýst</b> Max temperature	Hátrýsts vatnreinsarir High Pressure Water Cleaners



## MULTI OIL

### MULTI OIL

Hendan slætta og haldbara slangan úr NBR/PVC, kann nýtast til olju, diesel, biodiesel upp til 20%, blýfrítt og til onnur líknandi evni. Kann nýtast til ozon. Tolir úr -25 °C upp til 80 °C og 20 bar trýst. KJ hevur úr 6mm upp til 25mm á goymslu.

This smooth yet tough hose is made out of NBR/PVC. It can be used for oil, diesel, biodiesel up to 20%, petroleum and other chemicals alike. It can be used for ozon as well. Can withstand from -25 °C up to 80 °C and 20 bar pressure. KJ holds sizes 6mm up to 25mm on stock.

<b>Nýtsluóki</b> Area of use	Luft, Biobiesel 20% B20, Diesel, Bensin, Bensin E15, Feitt, Olju, Vatn / Air, Biobiesel 20% B20, Diesel, Gasoline, Gasoline E15, Grease, Oil, Water
<b>Litur</b> Color	Svart / Black
<b>Slangustödd</b> Hose size	6mm - 25mm
<b>Góðs</b> Material	NBR, PVC
<b>Brestipunkt</b> Pressure burst min.	60 bar
<b>Max trýst</b> Pressure max.	20 bar
<b>Mesta hitastig</b> Temperature max	+80 c
<b>Minsta hitastig</b> Temperature min.	-25 c



# VATNSLANGA 1220

## WATERHOSE 1200

Sera haldbær og sterkt slangar, til luft og vatn. Móttstøðufør ímóti stoyti og ósløttum flatum. Verður nýtt sum spulislanga til sjódnæðin, umframt á landi. Slangan er styrkt við flættaðum polyestertráði. Longdir á rullum eru 40 metrar. Tolir úr -30 °C upp til 80 °C og 20 bar trýst.

Especially tough and durable hose for pneumatics and water. Resistant to impact and rough surfaces. Is used as a water hose for action on sea and on land. The hose is reinforced with braided polyester thread. Length of rolls is 40 meters. Can withstand from -30 °C and up to 80 °C and 20 bar pressure.



INNARI DIAMETUR INSIDE DIAMETER	UTTARI DIAMETUR OUTSIDE DIAMETER	ARBEIÐSTRÝST WORKING PRESSURE	BRESTITPUNKT BURSTING PRESS	VINKULRADIUS BENDING RADIUS	VEKT WEIGHT
mm	mm	bar	bar	mm	g/m
13,0	22,6	20	64	120	500
16,0	26,0	20	64	150	600
19,0	29,4	20	64	180	670
25,0	36,2	20	64	250	930
32,0	45,6	20	64	320	1,3
38,0	51,6	20	64	350	1,49
45,0	59,4	20	64	450	1,95
51,0	65,4	20	64	500	2,18
63,0	77,0	20	64	600	2,61
76,0	91,6	20	64	900	3,1
90,0	106,0	20	64	1.05	4,7
102,0	118,0	20	64	1.15	5,19

# SUPERJET HÁTRÝSTS SPULISLANGA

## SUPERJET HIGH-PRESSURE WATER HOSE

Superjet hátrýstsspulislanga frá Parker við tveytáttadum stálveiri, er serliga gjörd til hátrýsts vatnreinsarir. Kann nýtast til konstant vatn við upp til 120 °C og klárar trýst upp til 400 bar.

Superjet high pressure water hose from Parker, braided with double steel wires. Made especially for high pressure water washers. Can be used with constant water up to 120 °C with a pressure up to 400 bar.



Hámark fyrir hitastig undir arbeiði Maximum Operating Temperature	120°C (vatn) 248 °F (Water), 120 °C (Water)
Hámark fyrir hitastig undir arbeiði Maximum Operating Temperature	120°C (vatn) 248 °F (Water), 120 °C (Water)
Góðs, innara síða Hose Inner Tube Material	Syntetiskt gummi Synthetic Rubber
Styrkigóðs á slangu Hose Reinforcement Material	Dupultflættaður veirur 2 Braids of High Tensile Wire
Nýtsla Application	Hátrýsts vatnreinsarir High Pressure Water Cleaners
Slanguverja Hose Cover Type	Blátt, syntetiskt gummi Blue synthetic rubber
Max arbeiðstrýst Maximum Operating Pressure	40 MPa, 5800 psi, 400 bar 40 MPa, 5800 psi, 400 bar



## AQUAFLEX AQUAFLEX

Aquaflex HD vakumslanga. Slangan verður veitt við innbygðum/vulkaniseraðum PN10 flansa í hvørjum enda. Slangan verður veitt við trýkantsprofi li úr stáli, ið er innbygdur í slanguni. Flansarnir eru í rustfríum stáli AISI304. KJ veitir alt úr 10" upp í 24" av hesi slangu og verður nýtt til fiskaflutning.

Aquaflex HD vacuum hose. The hose is delivered with built-in vulcanized PN10 flange in each end. The hose is also supplied with built-in triangled steel profile. The flanges are in stainless AISI304 steel. KJ offers from 10" and up to 24" sizes of this hose and is used for fish transportation.



INNARI DIAMETUR INSIDE DIAMETER	UTTARI DIAMETUR OUTSIDE DIAMETER	LONGD LENGTH	BRESTIPUNKT BURSTING PRESS
mm	inch	m	kg
254	10	10	214
254	10	12	250
305	12	6	180
305	12	10	280
305	12	12	330
355	14	6	236
355	14	10	367
355	14	12	434
406	16	6	285
406	16	10	445
406	16	12	525
457	18	10	544
457	18	12	640
508	20	10	670
508	20	12	831
600	24	10	920
600	24	12	1080

## FÓÐURSLANGA ANTISTATIC FISH FEEDING PIPE

Hendan anti-statiska fóðurslangan er framleidd við ser gjördari tökni. Slangan dálkar ikki og kann endurnýast. Hon er trygg at nýta bæði hjá fólk og fiski. Hon er eykend fyri at vera roynd endurtakandi ferðir fyri at tryggja góðskuna.

This antistatic fish feeding pipe is a long service-life hose with unique technology. The hose does not pollute and is recyclable. Safe for humans and fish and has qualitative value, since it is being continuously tried and tested.

STÖDD DIMENSION	SDR SDR	LONGD LENGTH
mm	SDR	m
90	11, 13, 6 & 17	350
63	11, 13, 6 & 17	350



# RAGNO ACQUA

## RAGNO ACQUA

PVC slanga úr styrktum polyestertráði og millumliggjandi PU límlagi, so slangan gerst móttostóðufór ímóti trústi. Hendan slangan verður nýtt til fiskaframleiðslu. Hon tolur úr -5 °C upp í 60 °C og arbeiðstrýst upp til 20 bar.

PVC hose with polyester yarn reinforcement and intermediate PU adhesive layer for delivery of food liquids under pressure. This hose is a perfect solutions for fish factories. Temperature range of the hose is -5 °C up to 60 °C and working pressure up to 20 bar.



INNARI DIAMETUR Ø NOMINAL		INNARI DIAMETUR Ø NOMINAL		INNARI DIAMETUR Ø NOMINAL		UTTARI DIAMETUR Ø O.D.		ARBEIÐSTRÝST Á 23°C WORKING PRESSURE AT 23°C		ARBEIÐSTRÝST Á 40°C WORKING PRESSURE AT 40°C		ARBEIÐSTRÝST Á 60°C WORKING PRESSURE AT 60°C		BRESTITPUNKT BURSTING PRESS	TOTAL TJÜKT TOTAL THICKNESS
mm	inch	mm	mm	bar	bar	bar	bar	bar	bar	m	m	m	m	m	
4		4	10	20	16	12	60	3							
5	3/16	5	11	20	16	12	60	3							
6	1/4	6	11	20	16	12	60	2,5							
6	1/4	6	12	20	16	12	60	3							
6	1/4	6	14	20	16	12	60	4							
7		7	13	20	16	12	60	3							
8	5/16	8	13	18	13	9	54	2,5							
8	5/16	8	14	18	13	9	54	3							
9		9	15	18	13	9	54	3							
10	3/8	10	15	18	13	9	54	2,5							
10	3/8	10	16	18	13	9	54	3							
12		12	17	12	9	6	36	2,5							
12		12	18	12	9	6	36	3							
13	1/2	13	18	12	9	6	36	2,5							
13	1/2	13	19	12	9	6	36	3							
15		15	21	10	7	4	30	3							
15		15	23	10	7	4	30	4							
16	5/8	16	21	10	7	4	30	2,5							
16	5/8	16	22	10	7	4	30	3							
19	3/4	19	25	10	7	4	30	3							
19	3/4	19	26	10	7	4	30	3,5							
22		22	30	8	5	3	24	4							
25	1	25	32	8	5	3	24	3,5							
25	1	25	33	8	5	3	24	4							
30		30	38	8	5	3	24	4							
32	11/4	32	42	8	4	2	24	5							
35		35	45	8	4	2	24	5							
38	11/2	38	48	8	4	2	24	5							
40		40	50	8	4	2	24	5							
50	2	50	62	8	4	2	24	6							





# FISKASLANGUR OG FITTINGS

FISH PUMP HOSES AND FITTINGS




# FISKAPUMPUSLANGA

## FISH PUMP HOSES

Fiskapumpuslanga úr 4" upp til 20", har fiskur verður pumpaður gjøgnum. Framleidd úr polymer, ið er av natúrligum gummi. Sera móttstöðufør ímóti sliti og skurðsli, skitnum vatni, organiskum oljum og petroleumsrestum.

Large diameter flat hose, through which fish is pumped from the underwater pump located in the mes, to the ship's holds. Made out of NR based polymer (Natural Rubber). Excellent for resistance to abrasion and cut wear, brackish water, organic oils and petroleum derivatives.

INNARI DIAMETUR Ø NOMINAL	INNARI DIAMETUR Ø NOMINAL	TJÜKT THICKNESS	ARBEIDSTRYST WORK PRESSURE	LONGD LENGTH	
mm	inch	mm	psi	bar	m
102	4"	3	100	6,8	40
127	5"	3	100	6,8	40
152	6"	3,5	100	6,8	20 - 160
203	8"	3,5	85	5,9	20 - 160
203	8"	4,5	85	5,9	20 - 160
254	10"	3,5	70	4,8	20 - 160
254	10"	4,5	70	4,8	20 - 160
305	12"	5,5	55	3,8	20 - 160
305	12"	12	55	3,8	5 - 20
356	14"	12	45	3	5 - 20
356	14"	5,5	45	3	20 - 160
406	16"	5,5	45	3	20 - 160
406	16"	6	45	3	20 - 160
457	18"	5,5	35	2,4	20 - 160
457	18"	6	35	2,4	20 - 160
508	20"	5,5	35	2,4	20 - 160
508	20"	6	35	2,4	20 - 160

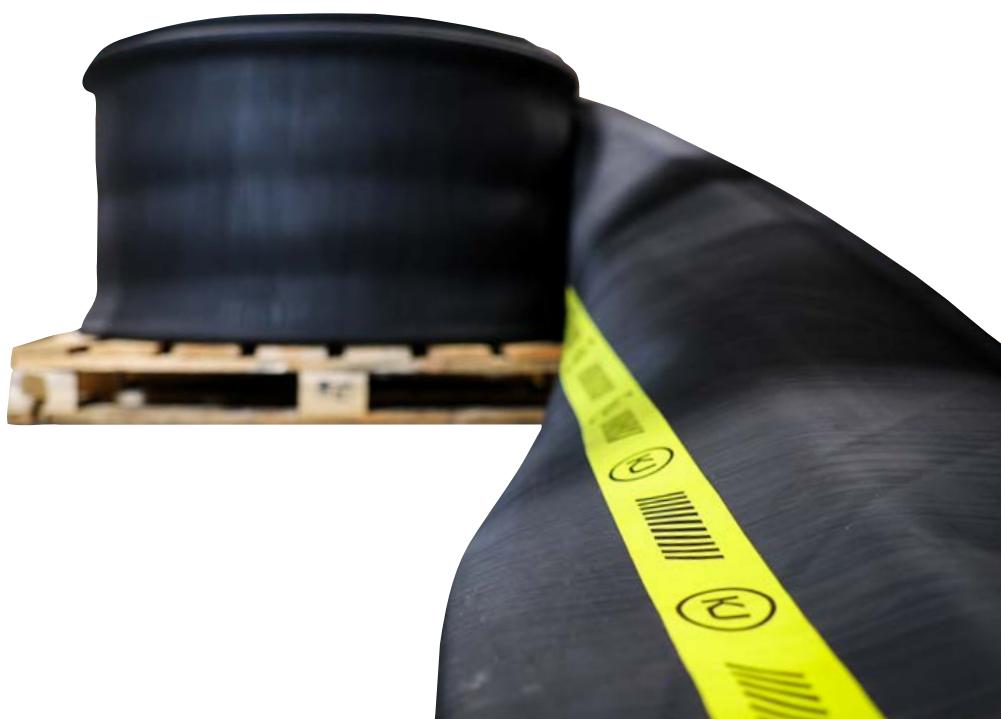

# **FISKASLANGUFITTINGS**

FISH HOSE FITTINGS

## **SLANGUSTUSSUR**

HOSE CONNECTOR

## **SLANGUKLEMMU**

HOSE CLAMP

## **SLANGUBEND**

HOSE BEND

## **SNARKOBLING**

QUICK RELEASE COUPLING

## **SLANGUREDUKTÍON**

HOSE REDUCTION

KJ hevur breitt úrval av fittings til fiskapumpuslangur, úr 12" upp til 20", á goymslu. Slanguklemmur eru á goymslu í bæði aluminium og rustfríum stáli. Vit hava bæði snarkobling við og utan pakning.

KJ has a wide range of fittings for fish pump hoses, from 12" up to 20" on stock. Hose clamps are in stock, in both steel and stainless steel. Quick release couplings are on stock, with or without seals.





## **SVØVIL** HOSE SWIVEL

KJ hevur aluminium og rustfríar svøvlar á goymslu. Rustfríu svøvlarnir eru við rullulegum og kunnu teir smyrjast.

KJ keeps both swivel in steel and stainless steel on stock. The stainless swivels are with bearings and can be lubricated.



## **SLANGUVØGGA, RUSTFRÍ** HOSE HOLDER, STAINLESS

KJ veitur rustfríar slanguvøggur úr 8" upp í 20". Vøggan er gjørd úr rustfríum rundstáli (AISI316) og hevur seks festishol. Kann nýtast til fiskaslangur og aðrar industri-slangur. Við hesum liggur slangan snøgt uppiá pláss, utan vanda fyrir skursli.

KJ delivers hose holders in stainless steel – from 8" up to 20". The hose holder is produced with stainless round steel (AISI316) and has six attaching holes. Can be used for fish hoses and other industry hoses alike. By using this, the hose is neatly put in place, with no risk of abrasion.





# HYDRAULIKK- SLANGUR

## HYDRAULIC HOSES





## HYDRAULIKKSLANGUR HYDRAULIC HOSES

# HYDRAULIKKSLANGA 462ST

## HYDRAULIC HOSE 462ST

Hydraulikkslanga 462ST (Super Tough). Hesar 2-lag hydraulikkslangur eru framleiddar við útvendigari verju úr syntetiskum gummi, við sergjördum polyethylene lagi. Hetta er sergjört til at tola sjógv og sól. Hesar slangur verða veittar við One-Piece fittings.

Hydraulic hose 462ST (Super Tough). These two-layered hydraulic hoses are produced with an outside cover made from synthetic rubber, with a special layer polyethylene. This is made to tolerate seawater and sunlight. These hoses are delivered with One-Piece fittings.



STØDD DIMENSION	ARBEIÐSTRÝST WORKING PRESSURE
inch	bar/psi
1/4"	425bar / 6160psi
3/8"	350bar / 5075psi
1/2"	310bar / 4495psi
3/4"	280bar / 4060psi
1"	210bar / 3045psi
1 1/4"	172bar / 2495psi

<b>Umslag á slangu</b> Hose cover type	Super Tough
<b>Spesifikátiúnir</b> Specifications	EN 857, Type 2SC, ISO 11237
<b>Útgáva av fittings</b> Fittings series	46 Series & Series 48
<b>Slangustyrking</b> Hose reinforcement	Dupultlagaður veirur / 2 Braids of high tensile wire
<b>Umslag (tilfar)</b> Cover material	Syntetiskt gummi við sermerktum polyethylen lagi / Synthetic rubber with a special polyethylene coating
<b>Tilfar á innaru síðu</b> Hose inner tube material	Nitril butadiene gummi (NBR) Nitrile butadiene rubber (NBR)
<b>Max arbeiðshiti</b> Maximum operating temperature	120 °C

# HYDRAULIKKSLANGA 797ST

## HYDRAULIC HOSE 797ST

Hydraulikkslanga 797ST (Super Tough). Hesar 4-lag hydraulikkslangur eru framleiddar við útvendigari verju úr syntetiskum gummi, við sergjördum polyethylene lagi. Hetta er sergjört til at tola sjógv og sól. Hesar slangur verða veittar við One-Piece fittings.

Hydraulic hose 797ST (Super Tough). These four-layered hydraulic hoses are produced with an outside cover made from synthetic rubber, with a special layer polyethylene. This is made to tolerate seawater and sunlight. These hoses are delivered with One-Piece fittings.



STØDD DIMENSION	ARBEIÐSTRÝST WORKING PRESSURE
inch	bar/psi
1/4"	425bar / 6160psi
3/8"	350bar / 5075psi
1/2"	310bar / 4495psi
3/4"	280bar / 4060psi
1"	210bar / 3045psi
1 1/4"	172bar / 2495psi

<b>Umslag á slangu</b> Hose cover type	Super Tough
<b>Spesifikátiúnir</b> Specifications	ISO 18752
<b>Útgáva av fittings</b> Fittings series	77 Series
<b>Slangustyrking</b> Hose reinforcement	Fýra lög av veiri 4 spirals of steel wire
<b>Umslag (tilfar)</b> Cover material	Syntetiskt gummi / Synthetic rubber abrasion resistant
<b>Tilfar á innaru síðu</b> Hose inner tube material	Syntetiskt gummi / Proprietary synthetic rubber compound
<b>Max arbeiðshiti</b> Maximum operating temperature	125 °C



# PARKER PTS (TRACKING SYSTEM)

## PARKER PTS (TRACKING SYSTEM)

Parker PTS - PTS stendur fyrir "Parker Tracking System". Sum teir einastu í Føroyum hevur KJ tracking system til allar hydraulikkslangur sum verða veittar. Allar hydraulikkslangur verða veittar við einum spjaldri, sum verður klistrað á slanguna. Við hesum kann kundin evt. skannað ella senda striukoduna til KJ og kundin fær júst somu slangu aftur. Á hendan hátt sleppur kundi undan at avmonterað hana og takað hann inn til KJ. PTS kann eisini nýtast sum alarm, t.d um ein slanga skal skiftast aftaná 1/2 ár, kann kundin seta alarm á appini sum so sigur frá. Á spjaldrið kann KJ skriva hvat kundin ynskir, eitt nú KJ-nummar og staðseting av slangu o.s.fr. Hetta er ein tænasta, sum KJ bjóðar sínum kundum.

Parker PTS - PTS stands for "Parker Tracking System". KJ is the only supplier in the Faroe Islands that has a tracking system for all delivered hydraulic hoses. All hydraulic hoses are supplied with a label. With this the customer can scan and/or send the bar code to KJ and get exactly the same hose back for a second order. In doing this, the customer does not have to dismount the hose and bring it back to KJ in order to get the exact same hose. PTS can also make an alarm when it is time to change the hose after half a year. This is done by using an app which signals when it is time to change it with a new hose. KJ can write whatever the customer wishes on the label - for example this can be the KJ-number of the hose, area of use etc. This service is offered to KJ's valued customers.





# SHIELDMASTER

## SHIELDMASTER

Shieldmaster 4000 - Tann vælkenda hydraulikslangan til fiskapumpuna. Hesa slangu hevur KJ veitt í kilometrvís til pelagisku skipini gjøgnum árini. Sera slitsterk slanga, við PVC gummi útvendiga, sum ger at hon glíður væl eftir dekkinum og lúnningini.

Shieldmaster 4000 - the famous hydraulic hose for the fish pump. KJ has delivered many kilometers of lengths of this hose for the pelagic vessels throughout the years. Exceptionally strong hose with PVC rubber on the outside, which makes it easy to work with.



STØDD DIMENSION	ARBEIÐSTRÝST WORKING PRESSURE
inch	bar/psi
11/4"	276bar / 4000psi
11/2"	276bar / 4000psi
2"	276bar / 4000psi
<b>Umslag á slangu</b> Hose cover type	Komposit lag við framúr mótsstöðuföri mótvægis skursli / Composite bi-layer structure with outstanding abrasion resistance
<b>Slangustyrking</b> Reinforcement	Fýra styrktir veifar / Four high tensile steel spirals
<b>Max arbeiðshiti</b> Maximum operating temperature	125 °C
<b>Góðkennung</b> Type approvals	CU-TR
<b>Tilfar á innaru síðu</b> Hose inner tube material	Syntetiskt gummi, tolur olju / Oil resistant synthetic rubber
<b>Lyklaeginleikar</b> Key features	<ul style="list-style-type: none"><li>ISO trýstsmát / Isobaric pressure rating</li><li>Tolur kaldastu umstöðurnar / FROST suitable for very cold environments</li><li>Framúr mótsstöðuföri ímóti skursli og oson / Outstanding abrasion and ozone resistance</li></ul>



# RØR- OG SLANGUFITTINGS, HYDRAULIKKUR

PIPE AND HOSE FITTINGS, HYDRAULICS



## ERMETO RØRFITTINGS

### ERMETO FITTINGS

Okkara ermeto fittings vísa til DIN2352/DIN EN ISO 8434-1. Ermeto fittings fáast í karbonstáli og rustfríum stáli. L-serian er á goymslu úr 6mm upp til 42mm. S-serian er á goymslu úr 6mm upp til 38mm.

Our ermeto type (profile ring) fittings comply with DIN 2353/DIN EN ISO 8434-1. Bite type (profile ring) fittings are available in carbon steel and stainless steel. The L-series is on stock from 6mm up to 42. The S-series is on stock from 6mm up to 38mm.



## JIC RØRFITTINGS

### JIC FITTINGS

Okkara JIC 37° fittings vísa til SAEJ 514 (ISO 8434-2). Eisini veita vit spesial JIC 37° fittings – bæði við, og utan o-ring. KJ hevur úr 7/16" upp til 1 7/8" á goymslu.

All our JIC 37° flare fittings comply with SAEJ 514 (ISO 8434-2). In addition to basic JIC 37° flare fittings, We also delivers special JIC 37° flare fittings – either with or without an O-ring. KJ has from 7/16" up to 1 7/8" on stock.



## BSP RØRFITTINGS

### BSP FITTINGS

Okkara BSP fittings við 60° konus kunnu fáast í karbon stáli og rustfríum stáli. KJ hevur frá 1/4" upp til 2" á goymslu.

Our BSP fittings with 60° cone are available in carbon steel or stainless steel. KJ has from 1/4" up to 2" on stock.





## ORFS RØRFITTINGS

### ORFS FITTINGS

Okkara ORFS fittings veita lekafría íbinding, eisini við hátrústi, vibratíónum og skjóttgangandi umhvørvi. KJ hevur frá 9/16" upp til 1 11/16" á goymslu.

O-Ring Face Seal fitting design provides leak-free connections in applications with high-pressure, vibration and impulse environments. KJ has from 9/16" up to 1 11/16" on stock.



## SLANGUFITTINGS

### HOSE FITTINGS

Vit bjóða eitt sera stórt úrval av One-Piece-slangufittings, frammeidd í Evropa. Óll eru sniðgivin til at fylgja skipanum við IFS slangum, soleiðis at góðska og avrik er í hásæti. Vit hava stórt úrval á goymslu av ermeto, BSP, JIC, ORFS og SAE, í bæði stáli og rustfríum stáli.

We offer a wide range of One-Piece fittings manufactured in Europe, all designed as a match system with IFS hoses, assuring quality and performance.





## SVØVIL

### SWIVEL JOINTS

SJ 10 útgávan av svøvlum (beinir). Eru framleiddir við tí fyri eyga, at verða settur millum slangufittings, soleiðis at slangan verður betri vard. Snúningsliðurin er gjørdur av einum ella tveimur røðum av radialum kúlum (ein røð upp til 1/2" íroknað). Pakningurin er úr nitrilgummi.

The series SJ 10 (straight) swivel joints are designed to be mounted between a hose assembly and a rigid component in order to allow and compensate occasional rotations, preventing hose damages. The swivel joint rotation is based on one or two rows of radial balls (one row up to size 1/2" included). Standard seals in nitril rubber.



VØRUNUMMAR ARTICLE NUMBER	ARBEIDSTRYST MAX PRESSURE IN ROTATION	MAX TRYST STATIC MAX PRESSURE
#	bar      psi	bar      psi
1004S	200    2900	400    5800
1006S	200    2900	400    5800
1008S	150    2175	300    4350
1012S	150    2175	300    4350
1016S	100    1450	300    4350
1020S	100    1450	300    4350
1024S	80     1160	300    4350
1032S	50     725	250    3625

## SVØVIL 90°

### SWIVEL JOINTS 90°

SJ 90 útgávan av svøvlum (vinkul). Eru framleiddir við tí fyri eyga, at verða settir millum slangufittings, soleiðis at slangan verður betri vard. Snúningsliðurin er gjørdur av einum ella tveimur røðum av radialum kúlum (ein røð upp til 1/2" íroknað). Pakningurin er úr nitrilgummi.

The series SJ 90 (angle) swivel joints are designed to be mounted between a hose assembly and a rigid component in order to allow and compensate occasional rotations, preventing hose damages. The swivel joint rotation is based on one or two rows of radial balls (one row up to size 1/2" included). Standard seals in nitril rubber.



VØRUNUMMAR ARTICLE NUMBER	ARBEIDSTRYST MAX PRESSURE IN ROTATION	MAX TRYST STATIC MAX PRESSURE
#	bar      psi	bar      psi
9004SJ	200    2900	400    5800
9006SJ	200    2900	400    5800
9008SJ	150    2175	300    4350
9012SJ	150    2175	300    4350
9016SJ	100    1450	300    4350
9020SJ	100    1450	300    4350
9024SJ	80     1160	300    4350
9032SJ	50     725	250    3625



# FILTUR OG FILTURHÚSAR

FILTERS AND FILTER HOUSINGS





## **SEPAR FILTURHÚSI SWK2000/40/U DUPLEX**

### **SEPAR FILTERHOUSING SWK2000/40/U DUPLEX**

Dupultur filterhúsi til brennolju. Verður ofta nýttur sum forfiltur til motorar. Verður eisini veitt við klárum glasi og avtapping. Hesin klárar 2400 litrar um tíman. Til hesar filterhúsar, fáast fiturelement úr 10 micron upp til 60 micron. Max trýst er 4 bar. Hesir fáast eisini sum einkulthúsar (simplex).

Double filterhousing for fuel oil. Is often used a pre-filter for engines. Are supplied with a clear glass and draining option. These manage 2400 ltr/hr. For these filter housings are filter elements from 10 micron up to 60 micron available. Max pressure is 4 bar. These are also available in simplex.



## **SEPAR FILTURHÚSI SWK2000/18/U DUPLEX**

### **SEPAR FILTERHOUSING SWK2000/18/U DUPLEX**

Dupultur filterhúsi til brennolju. Verður ofta nýttur sum forfiltur til motorar. Verður eisini veitt við klárum glasi og avtapping. Hesin klárar 1080 litrar um tíman. Til hesar filterhúsar, fáast fiturelement úr 10 micron upp til 60 micron. Max trýst er 7 bar. Hesir fáast eisini sum einkulthúsar (simplex).

Double filterhousing for fuel oil. Is often used a pre-filter for engines. Are supplied with a clear glass and draining option. These manage 1080 ltr/hr. For these filter housings are filter elements from 10 micron up to 60 micron available. Max pressure is 7 bar. These are also available in simplex.



## RACOR FILTURHÚSAR

### RACOR FILTERHOUSING

Racor Fuel Filter Water Separator Turbine serian er eitt trýdeild filturskipan, sum gevur maksimala verju av lutum í dieselmotorum. Tað beinur burtur skaðilig evni frá brennievni, so sum vatn, silikon, sand, skitt og rust. Hesir filterhúsar fáast við elementum við 2 micron, 10 micron og 30 micron. KJ veitur Racor filterhúsar í bæði einkultum og duplum húsum.

The Racor Fuel Filter Water Separator Turbine Series is a three-stage filtration system that provides maximum protection of diesel engine components by effectively removing contaminants from fuel, such as water, silica, sand, dirt, and rust. These Racor filterhousings are available in 2 micron, 10 micron and 30 micron. KJ can supply these in both single and double housings.



**Parker**

## VATNfilturhúsar

### FILTER HOUSINGS (WATER)

Styrktir polypropylen húsar hava sterkt kemiskt móttstöðuföri. Verða millum annað brúktir til reinsing av vatn/veskum umborð á skipum. Fáast í 10" og 20" stöddum við klárum, umframt kánum sniði. KJ hefur stórt úrval av filturelementum til hesar vatnfilterhúsar.

Reinforced polypropylene housings have excellent chemical resistance. Are used for fresh water production onboard vessels. Available in 10" and 20" sizes with clear and opaque sump options. KJ has a wide range of filter elements for these filter housings.



## FILTURHÚSAR

### FILTER HOUSINGS

KJ hefur filterhúsar á goymslu, til smyrji- og brennolju, umframt hydraulikk. Teir fáast rörmonteraðir og tangamonteraðir.

KJ keeps filter housings for lube- and fuel oil, as well as hydraulics on stock. Can be mounted on pipes as well as on tanks.



# FILTUR

## FILTERS

KJ hevur största úrval av filtrum í Føroyum, har omanfyri 1100 ymisk filter eru á goymslu. Umframta hetta, umboðar KJ nakrar av stórstu filterframleiðarunum í heimini. Hesir eru millum annað Donaldson, HIFI og Parker.

KJ has the biggest range of filters on stock in the country, where more than 1100 different filters are on stock. KJ also represents some of the world's largest producers of filters. These are for example Donaldson, HIFI and Parker.



## BOLL & KIRCH FILTUR

### BOLL & KIRCH FILTER

KJ bjóðar filter og deilir frá Boll & Kirch. Filtrini eru dygdargóð og væl umtókt, og verða einamest nýtt innan fiskivinnuna. Vit veita filterstavar úr polyester og stáli.

KJ offers filters and spare parts from Boll & Kirch. The filters are high-end quality and much sought after. They mostly used within the fishing industry. We offer filter rods in polyester and steel.




## FILTURMÁTTA PST290

### FILTER MATS

Filturmáttir til turbinur og annað. Fínleiki G3 og G4, breidd upp til 2 mtr og longd upp til 20 mtr. Tjúktin fæst í 10 mm og 20 mm.

Filter mats for turbines etc. Fineness G3 and G4, width up width up to 2 mtr and length up to 20 mtr. Thickness is available in 10 mm and 20mm.



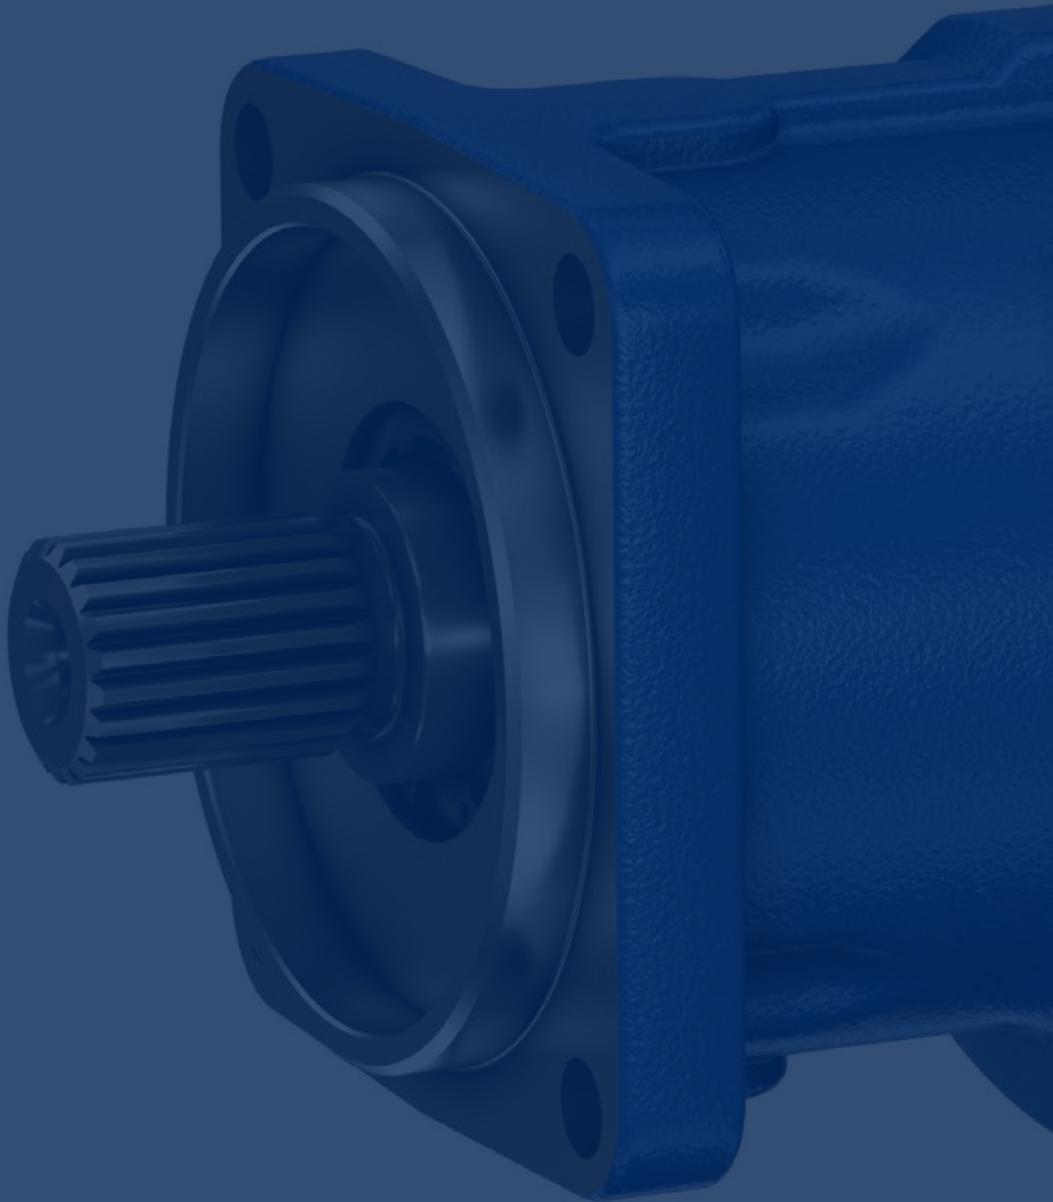



# HYDRAULISKAR PUMPUR OG MOTORAR

HYDRAULIC PUMPS AND MOTORS



## DANFOSS ORBIT MOTORAR

DANFOSS ORBIT MOTORS

KJ hevur stórt úrval av Danfoss Orbit hydraulikkmotorum á goymslu, t.d. OMR, OMM, OMT o.s.fr.

KJ has a wide range of Orbit hydraulic engines from Danfoss on stock. For example OMR, OMM, OMT etc.



## PARKER/DENISON PUMPUR

PARKER/DENISON PUMPS

KJ hevur flestallar Parker innmatar á goymslu. Eisini hevur KJ akslar, pakningssett og búsningar til Parker/Denison pumpur.

KJ keeps most of Parker cart.kits on stock. Besides, KJ also has shafts, sealkits and bushings for Parker/Denison pumps.



## TANNHJÓLSPUMPUR

### GEAR PUMPS

KJ hefur flest allar tannhjólpumpur í bólki tvey og trý á goymslu. KJ hefur í bólki tvey, úr 4cc upp til 40cc og í bólki trý, úr 27cc upp til 90cc á goymslu.

KJ has most gear pumps in group two and three in stock.  
KJ keeps group 2 from 4cc up to 40cc and in group 3 from 27cc up to 90cc in stock.



## REXROTH PUMPUR

### REXROTH PUMPS

KJ umboðar Rexroth og bjóðar stórt úrval av pumpum, ventilum, spolum o.tl.

KJ represents Rexroth and we offer a wide range of pumps, valves, coils etc.







# VATNPUMPUR

## WATER PUMPS





# PEDROLLO PUMPUR

## PEDROLLO PUMPS

KJ hefur stórt úrval av Pedrollo pumpum á goymlsu.  
KJ kann bjóða Pedrello pumpur við impellara úr bæði  
rustfríum og úr alu.bronsu.

KJ has a wide range of Pedrollo general purpose pumps  
on stock. KJ can offer Pedrollo pumps with impellers in  
stainless steel and alu.bronze.





# GRUNDFOS PUMPUR

## GRUNDFOS PUMPS

KJ bjóðar stórt úrval af pumpum og eykalutum frá Grundfos. Við kunnu eisini bjóða heildarloysnir til eitt nú smoltstöðir, skip o.a. KJ hevur tekniska og sterka vitan innan økið.

KJ offer a wide range of pumps and spare parts from Grundfos . We can also offer complete and comprehensive solutions for smolt hatcheries, maritime vessels etc. KJ has a strong and technical knowledge in this area.





**VATNPUMPUR**  
WATER PUMPS

# SAMSON VAKUUMPUMPUR

## SAMSON PUMPS

KJ umboðar Samson Pumps í Føroyum. KJ hevur Samson pumpur og eykalutir á goymslu.


KJ represents Samson Pumps in Faroe Islands. KJ can offer Samson pumps and spare parts, as they are an integral part of the stock.





# **LEGUR OG TRANSMISSIONIR**

## **BEARINGS AND TRANSMISSIONS**

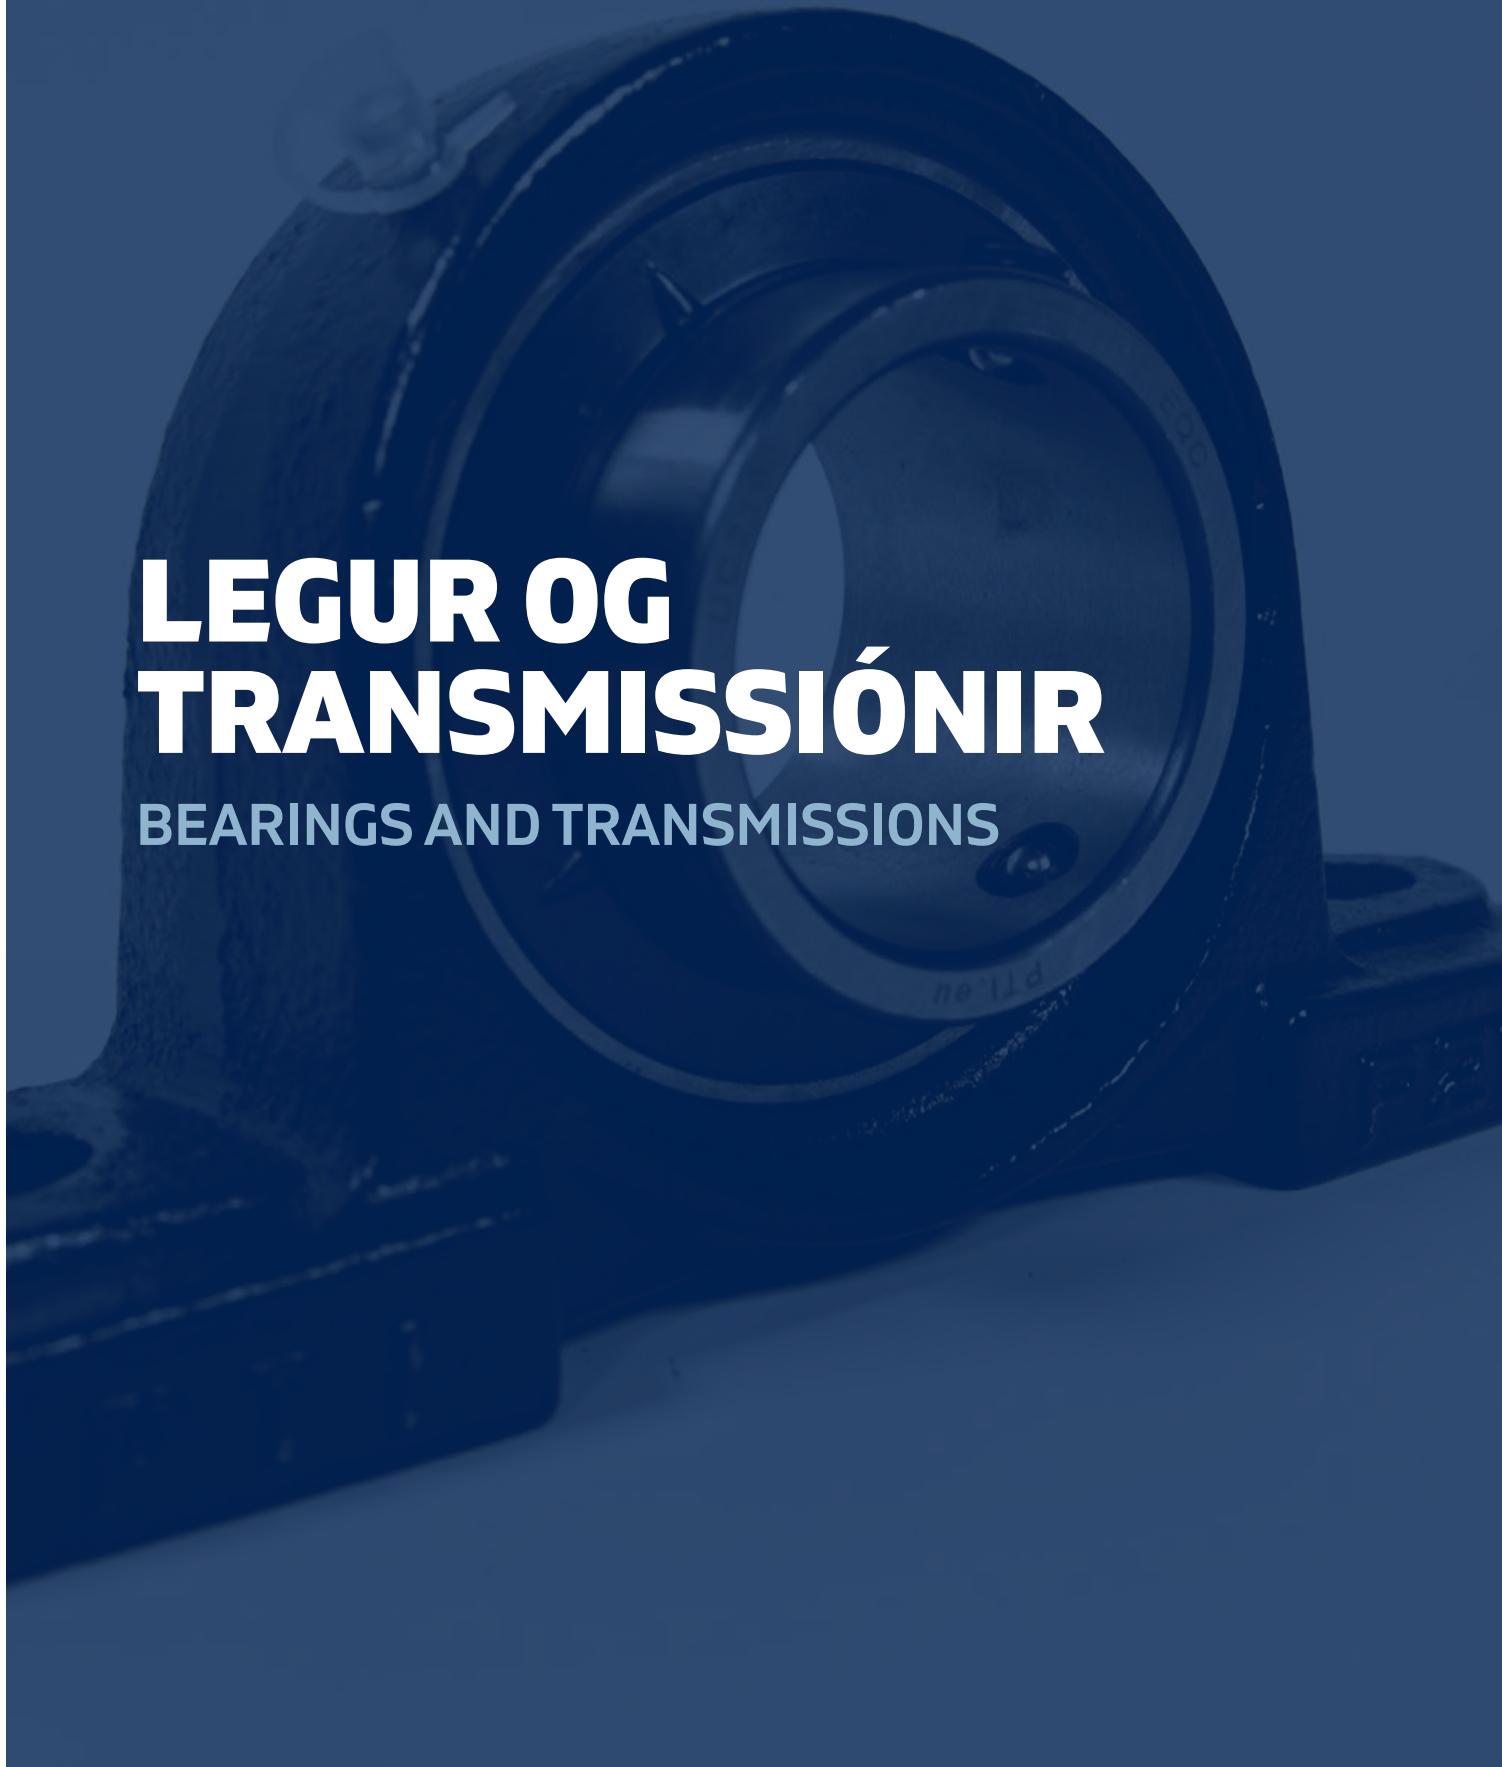



# **LEGUR OG TRANSMISSIONIR**

## BEARINGS AND TRANSMISSIONS

KJ hefur stórt úrval av legum og transmissiónum á goymslu. Umframt hetta, hefur KJ stórt úrval av kíla-reimum, koblingum, tannhjól og ketum v.m.

Úr stóra úrvalinum kann nevnast kúlulegur, vinkulkontaktlegr, sferiskar rullulegur, koniskar rullulegur og cylindriskar rullulegur. Umframt legur, eru eisini leguhúsar í plasti, stáli og rustfríum á goymslu.

Á goymsluni er eisini stórt úrval av koblingum. Til dömis Rexnord, softex v.m.

KJ hefur umframt hetta, eisini stórt úrval av ketum. Simplex, duplex og triplex. Hesar eru eisini á goymslu í rustfríum.

KJ keeps a wide range of bearings and transmissions on stock. Furthermore, KJ also has a wide range of V-belts, gears and chains etc.

Out of the vast array of spare parts are for example roller bearings, angular contact bearings, spherical bearings, conical bearings and cylindrical roller bearings. KJ also keeps bearing housings in plastics, steel and stainless steel on stock.

The warehouse contains a large range of couplings. Rexnord and softex to mention a few.

KJ has a wide range of chains on stock. Simplex, duplex and triplex. These are also available in stainless.





# INDUSTRI- VENTILAR

## INDUSTRY VALVES



# BUTTERFLYVENTILAR

## BUTTERFLY VALVES

KJ bjóðar eitt breitt úrval av butterfly ventilum, alt eftir hvat kundin ynskir. KJ hevur ventilar á goymslu frá DN40 og heilt up til DN400. KJ hevur bæði LUG og Wafer ventilar á goymslu, við NBR ella EDPM pakningi á goymslu. Hesir ventilar fáast við rustfríum og alu. bronsu spjöldrum.

KJ offers a wide selection of butterfly valves. We always keep valves on stock, from DN40 up to DN400 - KJ has both LUG and Wafer, as well as valves with NBR and EPDM seals. These valves are available with stainless and alu.bronze gates.



## CYL SPAKAVENTILAR

### CYL KNIFE VALVES

KJ hevur Cyl spakaventilar úr DN100 til DN450 á goymslu. Allir eru við luftsylindara. Til hesar hevur KJ eisini repara-tíónskitt, pakningar o.a. á goymslu.

KJ keeps Cyl knife valves from DN100 up to DN450 on stock. All are supplied with pneumatic cylinders. For these KJ also offers repkits, gaskets, etc. on stock.




## ELAFLEX KOMPENSATORAR

### ELAFLEX COMPENSATORS

Kompensatorar verða brúktir sum liðiligar samlingar millum rørskipanir. Bygnaðurin og longdin (installatións-stöddin) er viðurkend sum altjóða verandi standard.

Rubber Expansion Joints (compensators) are used as flexible connectors within pipe systems. Their construction and lengths (installation sizes) have since become internationally recognised standard



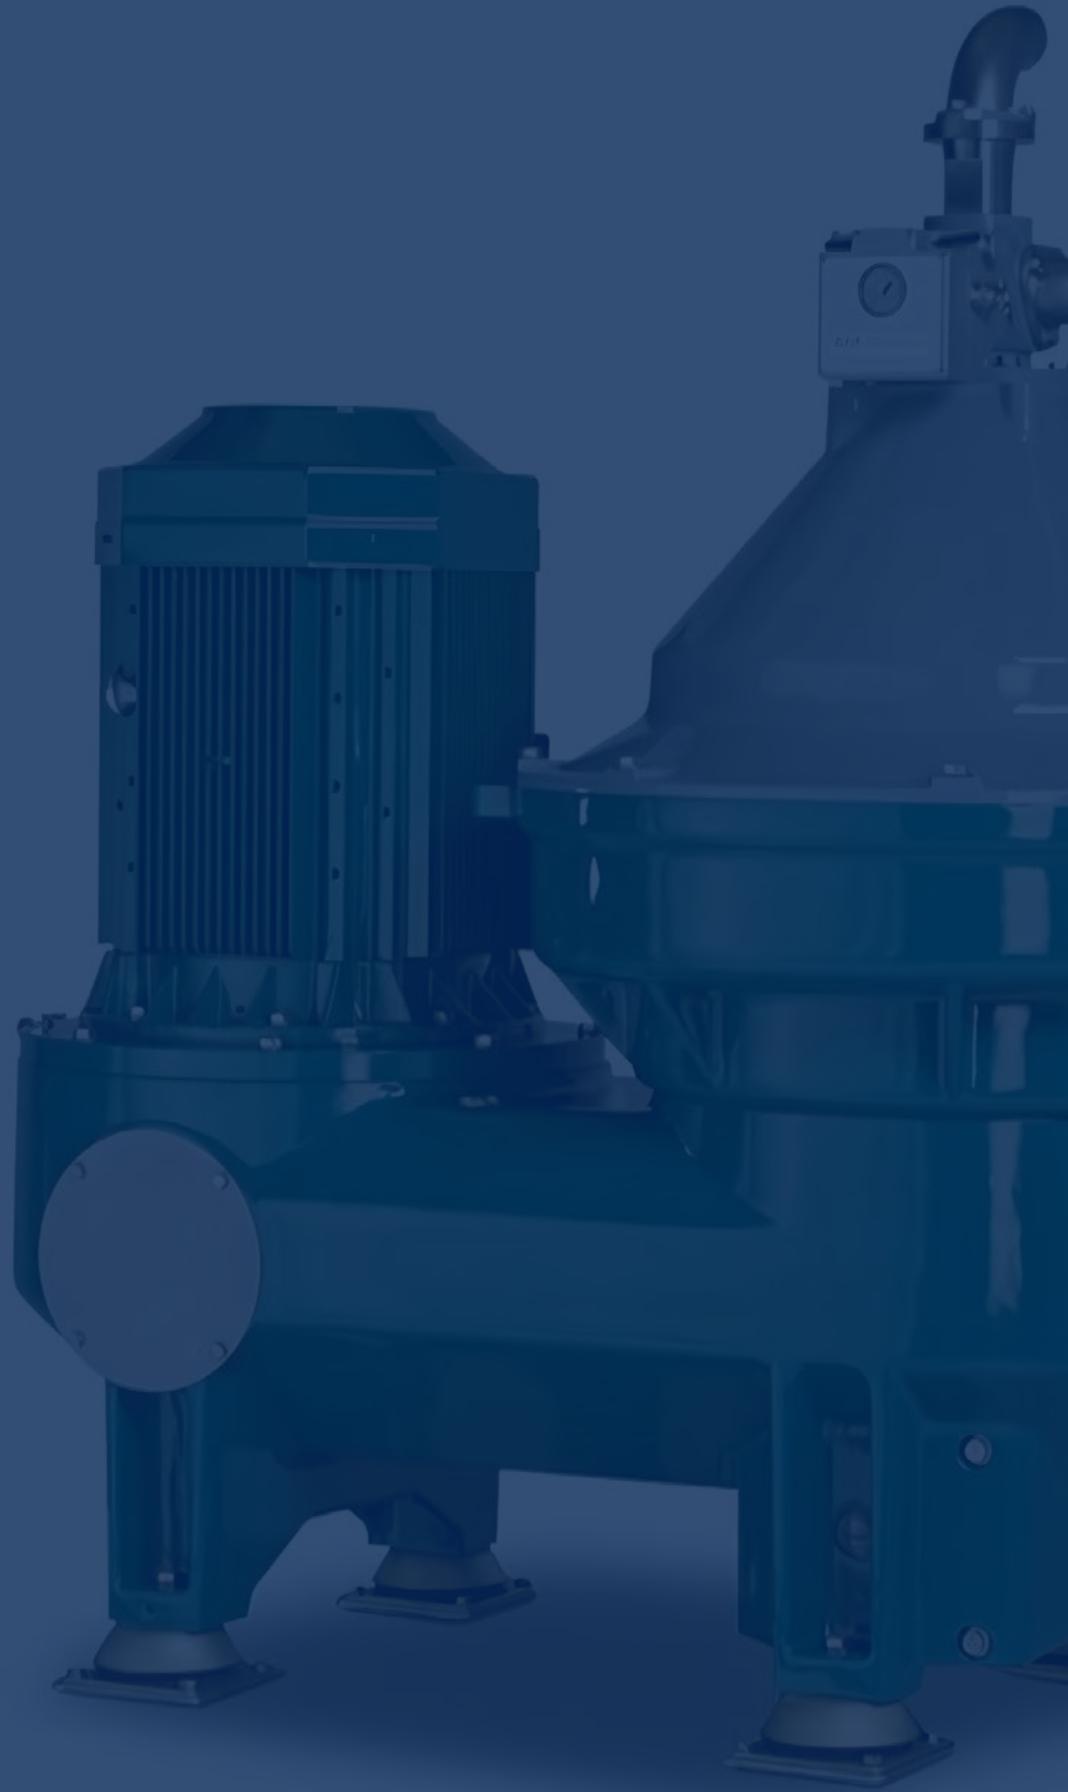



# SEPERATORAR

## SEPERATORS





**SEPERATORAR**  
SEPERATORS

## ALFA LAVAL

ALFA LAVAL

KJ hevur eitt breitt úrval av eykalutum til Alfa Laval. Eykalutir bæði til varmavekslara og separatorar. Til dømis service kit (intermediate og major), pakningar, reimar o.a.

KJ has a wide range of Alfa Laval spare parts on stock. Spare parts for such as separators and heat exchangers, for example service kits (intermediate and major), seals, belts etc.



## GEA WESTFALIA

GEA WESTFALIA

KJ hevur eitt breitt úrval av eykalutum til GEA Westfalia separatorar - pakningar, service kit o.a

KJ has a wide range of GEA Westfalia spare parts, for example for separators - seals, service kits and more.





# LUFT

## PNEUMATICS





## LUFTSLANGUR PA AIRHOSE PA

Væl egnaðar til vinnuliga nýtslu. PA slangur tryggja góða slitstyrk. Sergjört, stívt polyamid tilfar, ið er framleitt sambært eco-design leisti.

Tried-and-tested for industrial applications, PA tubing guarantees excellent durability due to its stable long-term mechanical properties. Special grade of semi-rigid polyamide manufactured according to our Eco-Design approach.



## LUFTFITTINGS PNEUMATIC FITTINGS

KJ hevur stórt úrval av Parker push-in luftfittings á goymslu. Hesi kunnu veitast bæði í plasti og í stáli, úr 3mm til 16mm.

KJ has a wide range of Parker push-in pneumatic fittings on stock. In both plastic and steel, going from 3mm up to 16mm.



# PARKER LUFTSYLINDRAR OG VENTILAR

## PARKER PNEUMATIC CYLINDERS AND VALVES

KJ hevur luftsyllindrar og luftventilar frá Parker á goymslu. KJ kann veita samlaða eind av stýriskipan til luft og luftsmyrjing.

KJ keeps pneumatic cylinders and valves from Parker on stock. KJ can supply customers with a complete set of pneumatic system as well as pneumatic lubrication.





## Rust Remover

Protects marine paint, boats and metal damage



UN1805

PHOSPHORIC ACID, SOLUTION

Code: 22MBBC0272  
Size: 25 Litre  
Content: phosphoric acid

For use on metal surfaces to remove paint, rust, scale, or other materials that may damage metal. It is also used to remove paint from metal surfaces. It is not intended for use on wood, glass, or other non-metallic materials.

With all its benefits, phosphoric acid is nothing less than a must have. Wash hands thoroughly after handling. Do not breathe spray or fumes. Avoid contact with eyes.

Danger



Vecom Marine B.V. • Muzerhuis 5 • 3144 NA Maassluis • The Netherlands  
[www.vecom-marine.com](http://www.vecom-marine.com) • [info@vecom-marine.com](mailto:info@vecom-marine.com) • +31 10 380 02 10  
Superior Quality Marine Chemicals - Since 1953



# KEMIKALIIR

## CHEMICALS



## TANK CLEAN ALKALINE 25L

### TANK CLEAN ALKALINE 25L

TANKCLEAN ALKALINE er eitt ikki-etsandi, heavy-duty alkaliskt reins, ið reinsar oljur, í tangum, ið bera serstaka coating. Tað er sergjört til at betra um reinsigóðsku, samstundis sum tað fyribryggir etsandi álopum. TANKCLEAN ALKALINE kann eisini nýtast sum luktdoyvandi reins, í flestøllum støðum. Hetta er sera góð sápa til vasking av skipsdekkum og tangum.

TANKCLEAN ALKALINE is a non-caustic heavy-duty alkaline cleaner formulated for cleaning oils from tanks with special coatings. It is specially designed to improve cleaning efficiency while overcoming the limitations imposed by caustic based cleaning compounds. TANKCLEAN ALKALINE can also be used as a deodorizing wash in all applications. This soap is suitable for cleaning decks onboard vessels and tanks.



## TANK CLEAN ALKALINE EXTRA 25L

### TANK CLEAN ALKALINE EXTRA 25L

TANKCLEAN ALKALINE EXTRA verður nýtt til at beina burtur oljur og restir í tangum. Tað kann eisini nýtast sum endalig viðgerð til reinsing av tangum. Kann harumframt nýtast til rustfrítt stál og epoxylagaðar tangar. Verður hartil nýtt til ketlar og sum luktdoyvandi reins. Hetta er sera góð sápa til vasking av skipsdekkum og tangum.

TANKCLEAN ALKALINE EXTRA is used for removal of edible and animal oil residues in cargo tanks. It is also used as a final treatment for cleaning tanks. TANKCLEAN ALKALINE EXTRA is suitable for use on stainless steel and epoxy coated tank materials. TANKCLEAN ALKALINE EXTRA is used for cleaning boiler furnace and as a neutralising agent. This soap is suitable for cleaning decks onboard vessels and tanks.



# VALVE TREAT 25L

## VALVE TREAT 25L

Við at koyra VALVE TREAT í bunkriolju, verður vanadium og sodium deaktiverað. Smeltipunktið á vaanadium pentoxide er 675 °C og á sodium sulfat er tað 880 °C. Táið VALVE TREAT verður nýtt, verða evnini við vanadium og sodium sulfat, við evnunum í VALVE TREAT, smeltbar á umleið 1100 °C.

Adding VALVE TREAT to bunker fuel forms a complex compound, that deactivates the vanadium and sodium common in heavy bunker fuels. The melting point of vanadium pentoxide is 675°C and that of sodium sulphate is 880°C. When VALVE TREAT is employed, the complexes formed with vanadium and sodium sulphate by the agents in VALVE TREAT melt at about 1100°C.



# FOT SLUDGE DISPERANT 25L

## FOT SLUDGE DISPERANT 25L

FOT SLUDGE DISPERSANT verður nýtt umborð á dampskipum og skipum annars, ið brenna leivdir av brennivnum. Hendan nýggja loysnin spjaðir evju, brýtur vatn í oljumylking, ið ger leivdirnar meir homogenar. Hetta hevur við sær, at brenningin gerst betur. Henda vørðan betrar um centrifugala loysing, sirmger og innspræning. FOT SLUDGE DISPERSANT er ein nýggj viðgerð til brenniölju, ið á betri hátt spjaðir evjuna, so motorurin verður hildin reinur og so viðlíkahaldsfríur sum tilber.

FOT SLUDGE DISPERSANT is used in both steam and motor vessels burning residual fuel oils. This new innovated treatment disperses sludge, breaks water in oil emulsions, making the residual fuel more homogeneous for combustion improvement. This product also improves centrifugal separation, atomisation and injector spray pattern. FOT SLUDGE DISPERSANT is a new generation fuel oil treatment, with a unique ability to disperse the sludge, keeping the pre-combustion system clean and maintenance free.





## **SEPERATOR DISC CLEANER 25L**

### SEPERATOR DISC CLEANER 25L

SEPARATOR DISC CLEANER er ein serstök blanding av surfaktantum, upploysingarevnum og sýrum, ið øll beina burtur carbonrestir o.a. frá smyrjoliu og brennioljuseparatorum.

SEPARATOR DISC CLEANER is an especially formulated blend of surfactants, solvents and acids designed to remove carbonaceous and varnish deposits from lube oil and fuel oil separator discs.



## **BOILER TREAT COMBI 25L**

### BOILER TREAT COMBI 25L

BOILER TREAT COMBI er ein flótandi blanding av molekylerum vekt-lutum, nevtraliserandi organiskum sýrum og etsingum, reinsi og evju viðgerðarevnum. Er gjørt til at økja um pH-virði á ketilsvatni (10.5 - 11.0), ið forðar etsing mest möguligt, við trýsti úr 7 til 35 bar.

BOILER TREAT COMBI is a liquid combination of low molecular weight components, neutralised organic acids and corrosion, scale and sludge conditioners. The specialised blended low molecular weight compounds are designed to elevate boiler water pH to levels, which reduce corrosion to the minimum possible in boilers (pH 10.5 – 11.0) with pressure of 7 to 35 bar.



## **RUST REMOVER**

### RUST REMOVER

RUST REMOVER er sera væl hóskandi til at beina burtur súrevni, klor, nitrat, amid, aminosýrur og onnur salt, nevtralir og alkaliska dálking, so sum kalsiumklorid, kalsiumnitrar o.tl. Eisini hóskar hetta sera væl til at reinsa restir eftir sjóvask. Reinsar og klárnar aluminium, messing og kopar. Ger flatuna klára, so tað er klárt at verða málað.

RUST REMOVER is suitable to remove oxides, chlorides, nitrates, amides, amines and other salts, neutral and alkaline contaminations like calcium chloride, calcium nitrate etc. Also very suitable to remove lime deposits after hot seawater washes. Cleans and brightens aluminium, brass and copper, renders the surface ready and suitable for painting



# KEMI

## CHEMISTRY





## BREMSUREINS BRAKE CLEANER

WEICON Brake Cleaner er eitt universareins til verstaðsíðnaðin. Reinsar, avfeittar og avdampar, uttan at lata skitt eftir sær.

WEICON Brake Cleaner is a universal cleaner for the mechanical industry, which cleans, degreases and evaporates without leaving residues.



## AT-44

### AT-44

WEICON AT-44 er eitt silikonfrítt all-round spray við PTFE.

WEICON AT-44 is a silicone-free all-round spray with PTFE.



## RUSTLOYSARI & KONTAKT SPRAY RUST REMOVER AND CONTACT SPRAY

WEICON rustloysara og kontaktsspray ger hetta idéelt til umvælingar og viðlíkahald.

The six-fold function of WEICON Rust Loosener and Contact Spray makes it indispensable for repairs, maintenance and service works.



## ELEKTROREINS ELEKTRO CLEANER

WEICON Electro Contact Cleaner er eitt spesialreins til skjóta reinsan og avfeiting av øllum sløgum av dálkaðum og rustaðum kontaktum. Reinsið er serliga ætlað til reinsan av elektroniskum og mekaniskum lutum.

WEICON Electro Contact Cleaner is a special cleaner for the fast and effective cleaning and degreasing of all kinds of soiled or corroded contacts. It is specially developed for the cleaning of electronic and mechanical components.



## VA-100 LÍM

### VA-100 GLUE

Sekundlím til gummi og plastik við miðal tjúkkleiki og miðallangari herdingstíð. SEGA-sertifiserað.

Strong adhesive for rubber and plastic with medium viscosity. Slightly longer cure time. ISEGA-certified.



## BLACK-SEAL

### BLACK-SEAL

Black-Seal er ein svört fuga, ið er sera móttstöðufør móti høgum hitastigum (+280°C). Fugan er frí frá uppløysingarevnum, sterkt, tolur olju, feitt, hátrýst og heldur sera leingi. Hon er sera elastisk (brotstyrkin er á umleið 500%)

Black-Seal is black, high-temperature-resistant (+280°C / +536°F), free of solvents, strong, oil-resistant, grease-resistant, pressure-resistant, resistant to ageing and extremely elastic (breaking elongation of approx. 500%).





## FLEX 310 HVÍTT

### FLEX 310 WHITE

WEICON Flex 310 M Classic Hvít er ein sterk fuga, ið kann málast á. Heldur sær í skapi og útsjónð sera leingi og er móttóðufør móti UV strálum. Tolur feskt- og saltvatn og er uttan silikon, isocyanat, halogenir og uppløsingarevnir.

WEICON Flex 310 M Classic White is strong, paintable (wet-on-wet), sandable, has an outstanding resistance to ageing and good resistance to UV rays. It is resistant to fresh and salt water and is free of silicone, isocyanate, halogens and solvents.



## FLEX 310 SUPER-TACK

### FLEX 310 SUPER-TACK

WEICON Flex 310 M Super-Tack er serdeilis sterk fuga, ið kann málast á. Heldur sær í skapi og útsjónð sera leingi og er móttóðufør móti UV strálum. Tolur feskt- og saltvatn og er uttan silikon, isocyanat, halogenir og uppløsingarevnir. Baserað á MS polymer.

WEICON Flex 310 M Super-Tack is very strong, paintable "wet-on-wet", sandable, weather-resistant, resistant to UV rays and free of silicone, isocyanate, halogens and solvents, and non-corrosive. Flex 310 M Super-Tack is a strong, elastic adhesive based on MS polymer.



## WEICONLOCK 305-42

### WEICONLOCK 305-42

Tetningur til hydraulikk ið hevur DVGW góðkenning. Miðal tjúkkleiki, miðal styrki og verður avtikin við vanligum amboðum

Hydraulic and with DVGW approval. Medium viscosity, medium strength and is disassembled with normal tools



# WEICONLOCK 305-77

## WEICONLOCK 305-77

Gevindtetningur við DVGW góðkenning. Högur tjúkkleiki, miðal styrki og verður avtikin við vanligum amboðum.

Threadsealing with and DVGW approval. High viscosity, medium strength and is disassembled with normal tools



# WEICON BR

## WEICON BR

Epoxy-baserað harpiks fylla, ið er gjörd til at fylla bláshol og til viðvíkahald av messing lutum. Kann nýtast í öllum maritíma ídnaðinum og eisini í flestöllum øðrum vinnuligum greinum. Verður ofta nýtt til umvæling av bátaskrúvum.

The epoxy resin system WEICON BR is particularly suitable for filling blowholes and for repairing and reconditioning bronze parts and bronze castings. It can be used in the entire marine and shipping industry as well as in many other industrial sectors. Is often used when repairing boat screws.





## OLJUMÁTTIR OIL MATS

Máttir til olju. Stødd: 40 x 50 cm. Tilfar: Smeltað polypropylene. Uppísúgving fer fram í tí lótu at kontakt er við fleturnar. Fiprarnar eru í natúrligari hydrofobiskari stöðu. Fiprarnar vísa vatn frá sær og flóta. Tað eru 100 máttir í hvørjum sekki.

Extra heavy oil only pads. Dimension: 40 x 50 cm - Composition: Melt-blown polypropylene. Starts absorbing on contact. Melt-blown polypropylene fibers are left in their natural hydrophobic state. These hydrophobic fibers repel water (and float) while only absorbing oils and other hydrocarbons. There are 100 mats in each bag.



## KLÚTAR / VISKISTYKKIR CLOTHS

Teir tiltiknu klútarnir (viskistykkir), KJ kann eisini veita bummulls klútar og litaðar. Hesir klútarnir fáast í 10kg sekkjum.

The well known oil-wiping cloths. KJ can also supply cotton cloths and colored cloths. These cloths are supplied in 10kgs bags.





# RØR- OG SLANGUKLEMMUR

TUBE AND HOSE CLAMPS



## **RØRBERARAR** TUBE CLAMPS

Rørberar við dekkplátum, sveisiplátum og boltum. KJ hefur eitt stórt og breitt úrval av rørberarum frá 6mm upp til 60mm. KJ veitir eisini dekk og sveisiplátur í rustfríum stáli.

Pipe carriers with deck plates, welding plates and bolts. KJ has a wide range of pipe carries on stock, going from 6mm up to 60mm. KJ supplies also deck and welding plates in stainless steel.



## **RUSTFRÍAR PARIKLEMMUR** POWER CLAMPS

Rustfríar pariklemmur. Sterkar slanguklemmur, sum kunnu nýtast til alskyns slög av slangum. Rustfríar við tveimum umbrakoboltum. KJ hefur goymslu úr 32mm til 350mm í hesum. Rørklemman hefur rustfríðar umbrakoboltar.



Stainless pari power clamps. Strong hose clamps that can be used for multiple purposes. Stainless, with two bolts. KJ has stock from 32mm to 350mm in this particular clamp. Bolts are also stainless.

## **RUSTFRÍ SLANGUBOND** HOSE CLAMPS

Rustfrítt slanguband G5. Slanguband úr 8mm til 250mm við einum bolti

Stainless hose clamps. From 8mm to 250mm. Single bolt.



# AXILOCK RØRKLEMMUR

## AXILOCK IV NBR

Axilock rørklemmurnar eru gjørdar til at avloysa tørvin á flansum, sveising og øðrum. Loysnin skal vera skjót og lött, soleiðis at eindirnar verða beindar saman. Við at seta klemmurnar saman í hvørjum enda, veitir Axilock trygd og góðsku á høðum stöði. Hvør klemma er 100% gummibundin, og tryggjar harvið rust-mótstøðuföri og verður hetta viðlíkahildið gjøgnum alla livtíðina á klemmuni.

The Teekay Axilock range is designed to replace the need for flanging, welding, pipe grooving and pipe threading by providing a quick and easy solution to joining plain-end pipe. Incorporating grip rings at each end of the fitting, the Teekay Axilock offers high levels of security by locking the pipes together under pressure. Each coupling is 100% rubber-lined, ensuring that high levels of corrosion resistance are maintained throughout the life of the coupling.



STØDD SIZE	TOLERANSA TOLERANCE	TRÝST PRESSURE	FÓRING CASING	BOLTAR BOLTS	PAKNINGUR SEAL
	mm	bar			
21,3mm Axilock-S type IV	21,0/21,6	16	AISI 316L	AISI 316	NBR & EPDM
26,8mm Axilock-S type IV	26,6/28,4	16	AISI 316L	AISI 316	NBR & EPDM
33,7mm Axilock-S type IV	33,3/34,1	16	AISI 316L	AISI 316	NBR & EPDM
38,0mm Axilock-S type IV	37,0/39,0	16	AISI 316L	AISI 316	NBR & EPDM
42,4mm Axilock-S type IV	41,4/43,4	16	AISI 316L	AISI 316	NBR & EPDM
48,3mm Axilock-S type IV	47,3/49,3	16	AISI 316L	AISI 316	NBR & EPDM
60,3mm Axilock-S type IV	59,0/62,0	16	AISI 316L	AISI 316	NBR & EPDM
76,1mm Axilock-S type IV	75,0/78,0	16	AISI 316L	AISI 316	NBR & EPDM
88,9mm Axilock-S type IV	88,0/91,0	16	AISI 316L	AISI 316	NBR & EPDM
114,3mm Axilock-S type IV	113,0/116,0	16	AISI 316L	AISI 316	NBR & EPDM
133,0mm Axilock-S type IV	132,0/135,0	16	AISI 316L	AISI 316	NBR & EPDM
139,7mm Axilock-S type IV	139,0/142,0	16	AISI 316L	AISI 316	NBR & EPDM
168,3mm Axilock-S type IV	167,0/170,0	16	AISI 316L	AISI 316	NBR & EPDM
219,1mm Axilock-S type IV	218,0/221,0	16	AISI 316L	AISI 316	NBR & EPDM



# CAMLOCK KOBLINGAR

## CAMLOCK COUPLINGS

KJ hefur eitt stórt úrval av Camlock koblingum á goymslu, bæði í aluminium og rustfríður. KJ veitir úr 1/2" upp til 10". Camlock koblingin er púra sløtt innan tá hon verður koblað saman, sum ger hesa kobling sera góða til fiskaflutning. Í koblingini liggur ein EPDM pakningur. Henda koblingin er sera slitsterk og tøtt.

KJ has a wide range of camlock couplings in aluminum and stainless steel on stock. KJ can offer these from sizes 1/2" up to 10". The camlock coupling has a great advantage in its smooth inside, which makes it ideal for fish transportation. In the coupling is a EPDM gasket. This coupling is exceptionally strong and closely sealed.

STØDD / GEVIND DIMENSION / THREAD	LUTUR A PART A	LUTUR B PART B	LUTUR C PART C	LUTUR D PART D	LUTUR E PART E	LUTUR DC PART DC	LUTUR DP PART DP
	Hann við innv. gevind Male with internal thread	Hon við útv. gevind Female with external thread	Hon við slangustussi Female with hose nipple	Hon við innv. gevind Female with internal thread	Hann við slangustussi Male with hose nipple	Proppur til hann End cap for male	Proppur til hon End cap for female
inch	#	#	#	#	#	#	#
1/2" BSP	CAM70010	CAM70180	CAM72010	CAM73010	CAM74010	CAM76010	CAM77010
3/4" BSP	CAM70020	CAM70190	CAM72020	CAM73020	CAM74020	CAM76020	CAM77020
1" BSP	CAM70025	CAM70200	CAM72025	CAM73025	CAM74025	CAM76030	CAM77030
1 1/4" BSP	CAM70030	CAM70210	CAM72030	CAM73030	CAM74030	CAM76040	CAM77040
1 1/2" BSP	CAM70040	CAM70220	CAM72040	CAM73040	CAM74040	CAM76050	CAM77050
2" BSP	CAM70050	CAM70230	CAM72050	CAM73050	CAM74050	CAM76075	CAM77075
2 1/2" BSP	CAM70060	CAM70240	CAM72060	CAM73060	CAM74060	CAM7682	CAM77082
3" BSP	CAM70075	CAM70250	CAM72075	CAM73075	CAM74075	CAM76076	CAM77076
4" BSP	CAM70100	CAM70260	CAM72100	CAM73100	CAM74100	CAM76077	CAM77077
5" BSP	CAM70125	CAM70270	CAM72125	CAM73125	CAM74125	CAM76078	CAM77078
6" BSP	CAM70150	CAM70280	CAM72150	CAM73150	CAM74150	CAM76079	CAM77079
8" BSP	CAM70160	CAM70290	CAM72200	CAM73160	CAM74200	CAM76080	CAM77080
10" BSP	CAM70170	CAM70300	CAM72210	CAM73170	CAM74210	CAM76081	CAM77081





# RØRFITTINGS

## TUBE FITTINGS



# RUSTFRÍTT, AMETAL OG GALVANISERAÐ GEVINDFITTINGS

## STAINLESS THREADED FITTINGS

KJ hefur eitt stórt úrval av BSP rørfittings á goymslu í galvaniseraðum, rustfríum og ametal. KJ hefur úr 1/4" upp til 4" á goymslu.

KJ has a wide range of BSP fittings on stock in galvanized, stainless and ametal. KJ has from 1/4" up to 4" on stock.



# SVEISIFITTINGS

## WELDING FITTINGS

Vit hava mest vanligu sveisifittingsini, so sum flansar, vinklar, tee og reduktiónir á goymslu úr 1" upp til 18". KJ kann veita sveisifittings í rustfríum, aluminium og vanligum stáli

KJ has the most common welding fittings, such as flanges, bends, tees and reductions, on stock. From 1" up to 18". KJ can supply welding fittings in stainless, aluminium and steel.





The background of the image features three large, light-colored pipes or tubes stacked diagonally. The top pipe is oriented vertically, while the two below it are angled towards the bottom left. The pipes have a slightly textured surface and are set against a dark, solid background.

**RØR**  
**TUBES**



RØR  
TUBES

## HYDRAULIKKRØR

### HYDRAULIC TUBE

KJ hevur eitt stórt úrval av elgalvaniseraðum hydraulikkrörum, úr 4mm til 90mm.

KJ has a wide range of electroplated hydraulic fittings on stock



## RUSTFRÍTT HYDRAULIKKRØR 316AISI

### HYDRAULIC TUBE STAINLESS 316AISI

KJ hevur eisini eitt stórt úrval av rustfríum, sýruföstum hydraulikkrörum, úr 6mm til 60mm. Óll rörini eru AISI316.



KJ also has a wide range of stainless, acid resistant hydraulic tubes on stock, from 6mm up to 60mm. All tubes are AISI316.

## GEVINDSTONG

### THREAD ROD

KJ hevur eitt stórt úrval av gevindstongum, bæði í rustfríum, elgalvaniseraðum og heittgalvaniseraðum góðsi. Av rustfríum gevindstongum hevur KJ goymslu úr 3mm upp í 30mm og í elgalvaniseraðum úr 6mm upp í 30mm. Í heittgalvaniserðum hevur KJ úr 16mm upp í 27mm.



KJ has a wide range of threaded rods on stock, in stainless steel, electrogalvanized and hot-dip galvanized material. In stainless KJ keeps from 3mm up to 30mm, in electrogalvanized from 6mm up to 30mm and in hot-dip galvanized from 16mm up to 27mm on stock.

## RUSTFRÍTT GEVINDRØR

### STAINLESS STEEL TUBES FOR THREADING

KJ hevur eitt stórt úrval av rustfríum gevindørum á goymslu, úr 1/4" til 4".

KJ keeps a wide range of stainless threaded tubes on stock, from 1/4" up to 4".



## PRIMAÐ STÁL PRIMED STEEL

KJ hevur eitt stórt úrval av primaðum stáli á goymslu. Umframt rör, hevur KJ millum annað flatstál, vinkulstál, rørprofilar og annað primað stál á goymslu.

KJ has a wide range of primed steel on stock. Besides tubes, KJ has flat bars, angled bars, pipe profiles and other primed steel goods on stock.





# ALFABETISKT INNIHALDSYVIRLIT

TABLE OF CONTENTS IN ALPHABETICAL ORDER



# ALFABETISKT INNHALDSYVIRLIT

## TABLE OF CONTENTS IN ALPHABETICAL ORDER

# ALFABETISKT INNHALDSYVIRLIT

Alfa Laval .....	54	Parker/Denison pumpur .....	40
Aquaflex .....	18	Parker luftsylindrar og ventilar .....	57
Aspiroil .....	16	Parker PTS (Tracking System) .....	27
Aspir PU/H .....	15	Pedrollo pumpur .....	44
AT-44 .....	64	Primað stál .....	79
Axilock rørklemmur .....	71	Racor filterhúsar .....	35
Black-Seal .....	65	Ragno Acqua .....	19
Boiler Treat Combi 25L .....	62	Rexroth pumpur .....	41
Boll & Kirch filtrar .....	37	Rørberrarar .....	70
Bremsureins .....	64	Rustfriar pariklemmur .....	70
BSP rørfittings .....	30	Rustfrí slangubond .....	70
Butterflyventilar .....	50	Rustfrítt, Ametal og Galvaniserað gevindfittings ..	74
Camlock koblingar .....	72	Rustfrítt gevindrør .....	79
Cyl spakaventilar .....	51	Rustfrítt hydraulikkrør 316AISI .....	78
Danfoss Orbit motorar .....	40	Rustloysari & kontakt spray .....	64
Elaflex kompensatorar .....	51	Rust remover .....	62
Elektroreins .....	65	Samson Vakuumpumpur .....	46
Ermeto rørfittings .....	30	Separ filterhúsi SWK2000/18/U Duplex .....	34
Filtur .....	36	Separ filterhúsi SWK2000/40/U Duplex .....	34
Filturhúsar .....	35	Seperator Disc Cleaner 25L .....	62
Filturmáttá PST290 .....	37	Shark slanga .....	13
Fiskapumpuslanga .....	22	Shieldmaster .....	28
Fiskaslangufittings .....	23	Slangubend .....	23
Flex 310 Hvít .....	66	Slangufittings .....	31
Flex 310 Super-Tack .....	66	Slanguklemma .....	23
Flexfab kølivatnsslanga .....	15	Slangureduktión .....	23
Fóðurslanga .....	18	Slangustussur .....	23
Fot Sludge Disperant 25L .....	61	Slanguvøgga, rustfrí .....	24
GEA Westfalia .....	54	Snarkobling .....	23
Gevindstong .....	78	Superflex PU R .....	12
Grundfos pumpur .....	45	Superjet Hátrýsts Spulislanga .....	17
Hydraulikkrør .....	78	Sveisifittings .....	75
Hydraulikslanga 462ST .....	26	Svøvil .....	24
Hydraulikslanga 797ST .....	26	Svøvil .....	32
Jamaica HD .....	14	Svøvil 90° .....	32
JIC rørfittings .....	30	Tank Clean Alkaline 25L .....	60
Klútar / Viskistykir .....	68	Tank Clean Alkaline Extra 25L .....	60
Legur og transmissiónir .....	48	Tannhjólspumpur .....	41
Luftfittings .....	56	VA-100 Lím .....	65
Luftslangur PA .....	56	Valve Treat 25L .....	61
Luisiana superelastics .....	10	Vatnfilterhúsar .....	35
Multi oil .....	16	Vatnslanga 1220 .....	17
Oljumáttir .....	68	Weicon BR .....	67
Oregon PU PS Blá .....	11	Weiconlock 305-42 .....	66
Oregon PU PS Reyð .....	11	Weiconlock 305-77 .....	67
ORFS rørfittings .....	31		



# TABLE OF CONTENTS IN ALPHABETICAL ORDER

Airhose PA .....	56	Hydraulic Tube Stainless 316AISI .....	78
Alfa Laval .....	54	Jamaica HD .....	14
Antistatic Fish Feeding Pipe .....	18	JIC fittings .....	30
Aquaflex .....	18	Luisiana superelastics .....	10
Aspiroil .....	16	Multi oil .....	16
Aspir PU/H .....	15	Oil mats .....	68
AT-44 .....	64	Oregon PU PS Blue .....	11
Axilock IV NBR .....	71	Oregon PU PS RED .....	11
Bearings and transmissions .....	48	ORFS fittings .....	31
Black-Seal .....	65	Parker/Denison pumps .....	40
Boiler Treat Combi 25L .....	62	Parker pneumatic cylinders and valves .....	57
Boll & Kirch filter .....	37	Parker PTS (Tracking System) .....	27
Brake Cleaner .....	64	Pedrollo pumps .....	44
BSP fittings .....	30	Pneumatic fittings .....	56
Butterfly valves .....	50	Power clamps .....	70
Camlock couplings .....	72	Primed steel .....	79
Cloths .....	68	Quick release coupling .....	23
Cyl knife valves .....	51	Racor filterhousing .....	35
Danfoss Orbit motors .....	40	Ragno Acqua .....	19
Elaflex compensators .....	51	Rexroth pumps .....	41
Elektro Cleaner .....	65	Rust remover .....	62
Ermeto fittings .....	30	Rust remover and contact spray .....	64
Filter housings .....	35	Samson Pumps .....	46
Filter housings (water) .....	35	Separ filterhousing SWK2000/18/U Duplex .....	34
Filter mats .....	37	Separ filterhousing SWK2000/40/U Duplex .....	34
Filters .....	36	Seperator Disc Cleaner 25L .....	62
Fish Hose Fittings .....	23	Shark Hose .....	13
Fish Pump Hoses .....	22	Shieldmaster .....	28
Flex 310 Super-Tack .....	66	Stainless steel tubes for threading .....	79
Flex 310 White .....	66	Stainless threaded fittings .....	74
Flexfab cooling water hose .....	15	Superflex PU R .....	12
Fot Sludge Disperant 25L .....	61	Superjet high-pressure water hose .....	17
Gear pumps .....	41	Swivel joints .....	32
GEA Westfalia .....	54	Swivel joints 90° .....	32
Grundfos pumps .....	45	Tank Clean Alkaline 25L .....	60
Hose bend .....	23	Tank Clean Alkaline Extra 25L .....	60
Hose clamp .....	23	Thread rod .....	78
Hose Clamps .....	70	Tube clamps .....	70
Hose connector .....	23	VA-100 Glue .....	65
Hose fittings .....	31	Valve Treat 25L .....	61
Hose holder, stainless .....	24	Waterhose 1200 .....	17
Hose reduction .....	23	Weicon BR .....	67
Hose swivel .....	24	Weiconlock 305-42 .....	66
Hydraulic hose 462ST .....	26	Weiconlock 305-77 .....	67
Hydraulic hose 797ST .....	26	Welding fittings .....	75
Hydraulic tube .....	78		



---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---


---

---

---

---

---

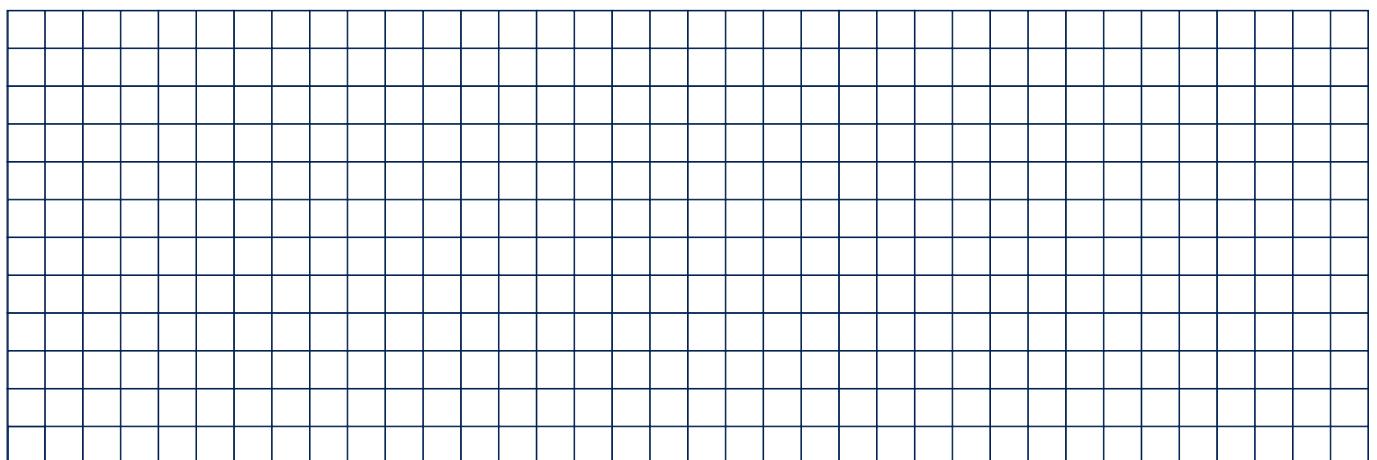



---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---


---

---

---

---

---

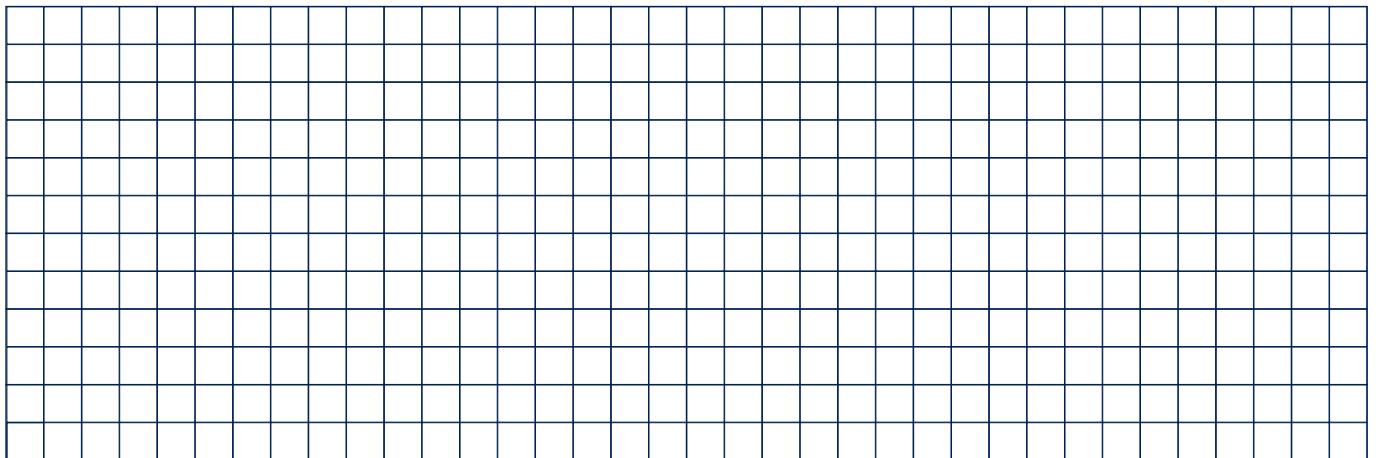



---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---


---

---

---

---

---

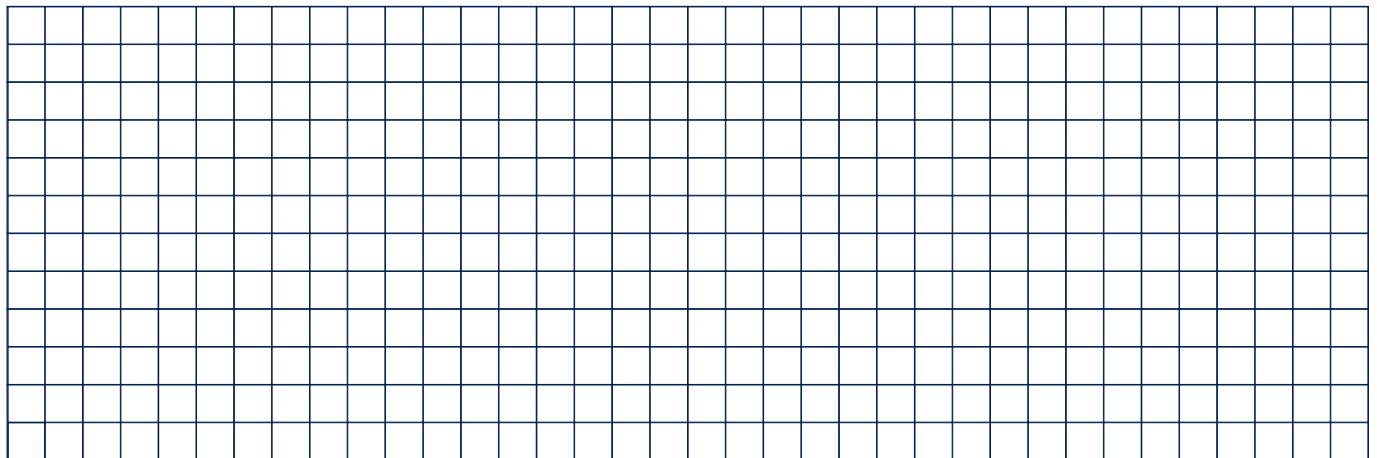


# There is always room for improvement!

Winches and deck equipment especially made for large catches. Multidrive solutions ensure dynamic performance and redundancy. Our proven technology, reduced weight, and footprint combined with efficiency ensures reduced fuel consumptions and use of valuable deck space.



## Trawl winch

- Robust multidrive
- Dynamic performance
- Redundant
- Market leading efficiency

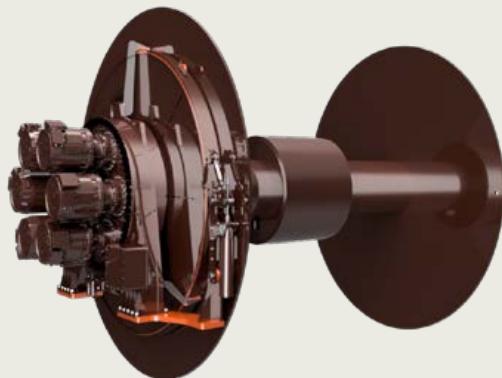

## Net winch

- Improved tension control and mooring functionality
- Robust multidrive
- Redundant



## Purse seine winch

- Ultrasmooth deployment
- Recovers and reuses energy
- Improved control in harsh conditions
- Compact design



## Evotec Control System

- More and more systems require even more focus on rapid and reliable control.



## Evotec Autotrawl

- Developed in close cooperation with experienced fishing operators all over the world.
- System prepared for solutions up to 7 trawl winches.

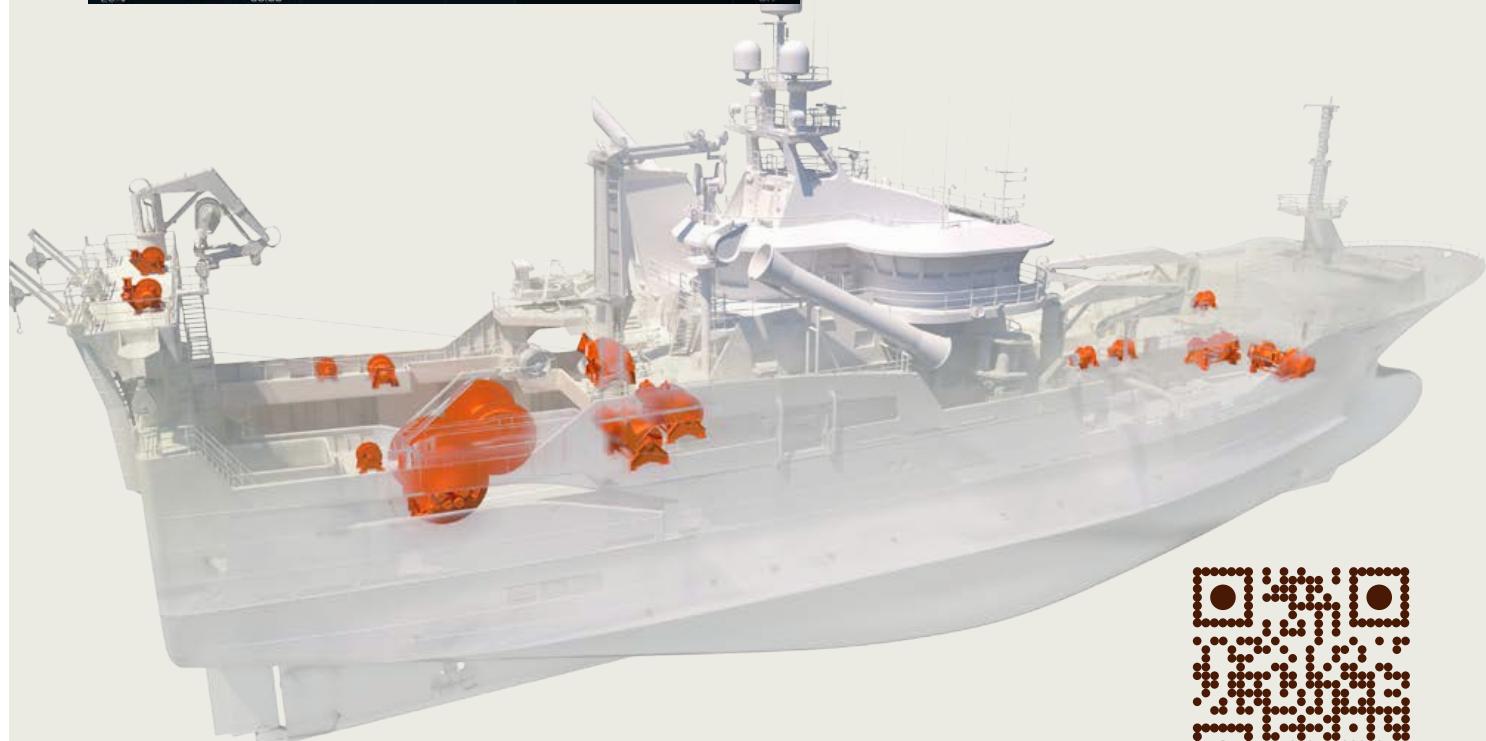

# Deck Cranes

Storm philosophy is to build reliable, robust and strong performing cranes through smart and innovative design and quality fabrication.

## Knuckle Boom Cranes

Standard or custom design with robust construction for long time use and minimal maintenance.

Range: **7m to 30m**

Hauling power: **1T to 15T**



## Single Boom Cranes

Deck cranes available in a wide range. Standard or custom design with robust construction for long time use and minimal maintenance.

Range: **7m to 30m**

Hauling power: **1T to 15T**


## Hose Handling Cranes

Cranes specially designed for Hose handling on Livefish Carriers.

Range: **12m to 20m**

SWL (Hose winches): **1T to 2T**

SWL (Main winch): **5T to 8T**

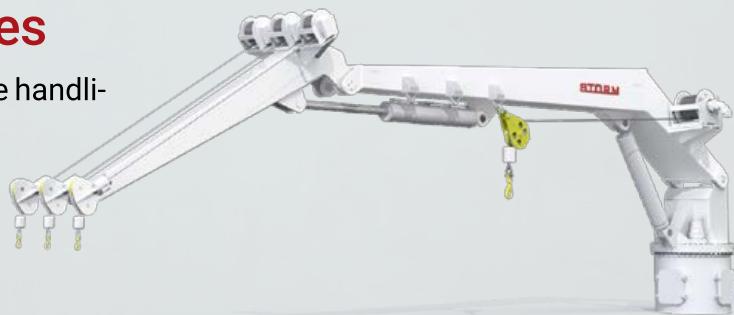

# Net Handling Equipment

Storm offers a wide range of standard products and specific products at customer request.

## Net Cranes

Standard design with robust construction.  
Can be delivered with arm lengths to fit different size of vessels.

Hauling power (Roller unit): **3000kp to 5000kp**  
SWL (Winch): **2.5T to 6T**



## Nethaulers

Standard design with robust construction.  
Delivered with hydraulic or electrical drive.

Hauling power: **15T to 30T**



## Corkline Stacker


Standard design with robust construction.

Range: **5m to 8m**

Hauling power: **3000N**

# CRITICAL POWER

1 MWe Generator with Yanmar Engine

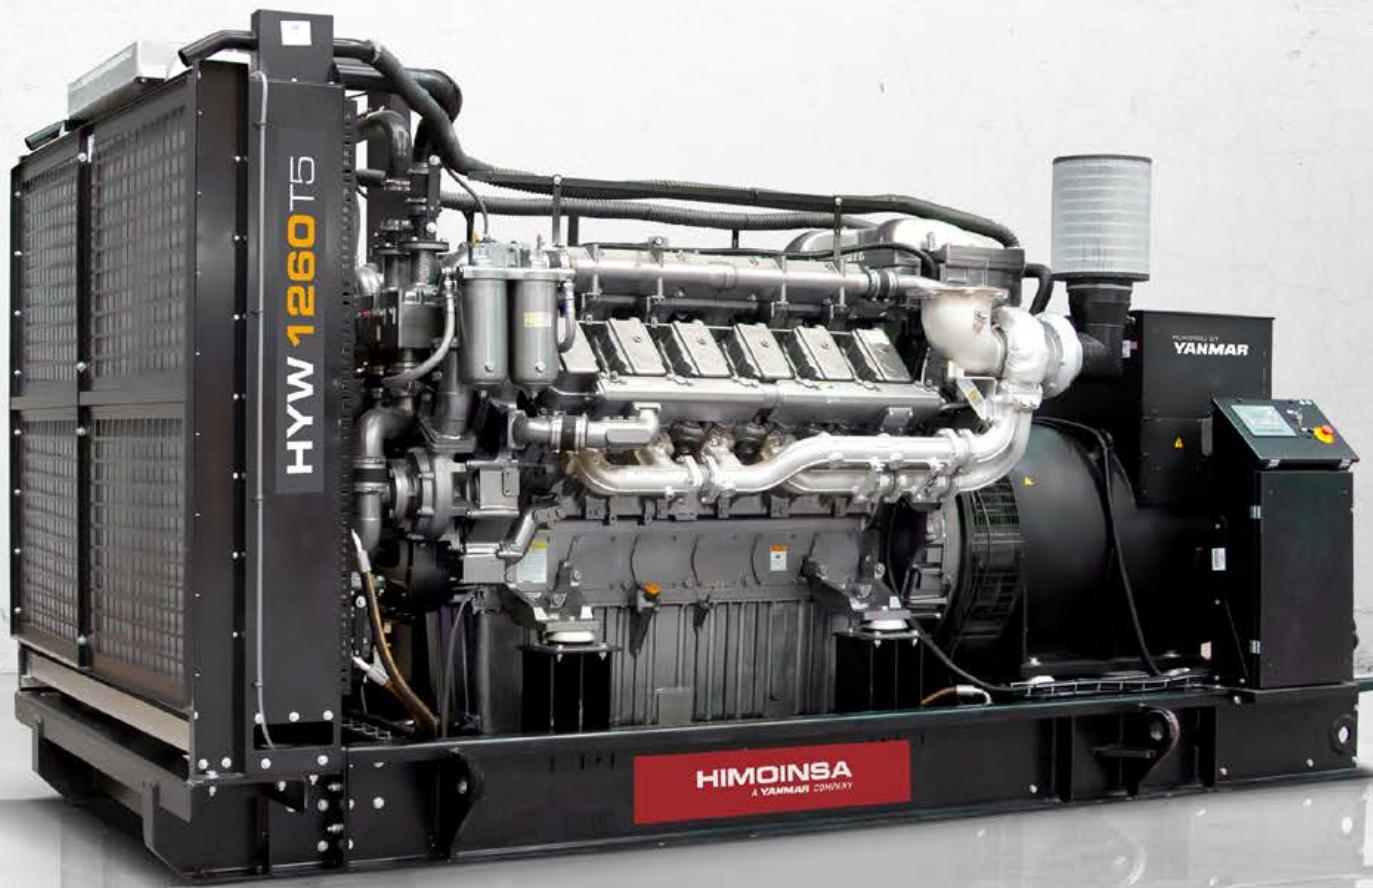

**YANMAR**  
ENGINE

Efficiency & Reliability

Tel: +298 407000  
[sales@kj.fo](mailto:sales@kj.fo)

**HIMOINSA**  
A YANMAR COMPANY

# DIESEL & GAS GENERATORS



## *On-Site* Power

We not only offer  
QUALITY PRODUCT  
But also  
ENGINEERING  
SOLUTIONS

Tel: +298 407000  
[sales@kj.fo](mailto:sales@kj.fo)

**HIMOINSA**  
A **YANMAR** COMPANY



AQUACULTURE SEGMENT

# ELEVATING YOUR AQUACULTURE OPERATIONS



## FOLDABLE KNUCKLE BOOM CRANES

/// Their sophisticated crane geometry and compact construction make PALFINGER MARINE foldable knuckle boom cranes a convenient, multi-functional tool for effortless loading and unloading of equipment – especially in confined working areas. They can be customized to meet offshore rules and regulations and come with a variety of options and additional features.



## EFFICIENT AND RELIABLE LIFTING SOLUTIONS

Based on many years of experience, PALFINGER has developed a range of cranes that meet the lifting requirements of the aquaculture industry. Typical applications include service vessels, workboats, barges and live fish carriers.

Having delivered more than 2,500 cranes to the industry worldwide, PALFINGER is the preferred supplier for the tried and trusted marine cranes like foldable knuckle boom cranes, telescopic boom cranes, knuckle boom cranes and stiff boom cranes.

PALFINGER cranes offer a compact construction and low weight. Thanks to standardized components and intuitive operation, installation and integration are seamless, requiring minimal downtime. Central Remote Control enables the operator to control each crane separately using two joysticks, directly from the bridge.

### TELESCOPIC KNUCKLE BOOM CRANES

*/// PALFINGER's telescopic knuckle boom cranes are designed specifically for heavy lifting with a wide outreach requirement, and they offer the advantage of requiring minimal deck space despite their high power output.*

### TELESCOPIC BOOM CRANES

*/// PALFINGER's telescopic boom cranes are based on a pedestal slewing design with hydraulic cylinder luffing. The boom extension is a telescopic inner section that enables a more flexible and wider operational radius and leaves the crane stored in a compact position. Their low weight and less complex design make them particularly maintenance-friendly. One of the optionally available features is a multiple winch system. This makes efficient, flexible and precise handling of multiple lifting and positioning tasks possible.*


Tel: +298 407000  
[sales@kj.fo](mailto:sales@kj.fo)

**PALFINGERMARINE.COM**

# STEV<sup>®</sup>

## Expert Control

INDIVIDUAL. PRECISE. DURABLE

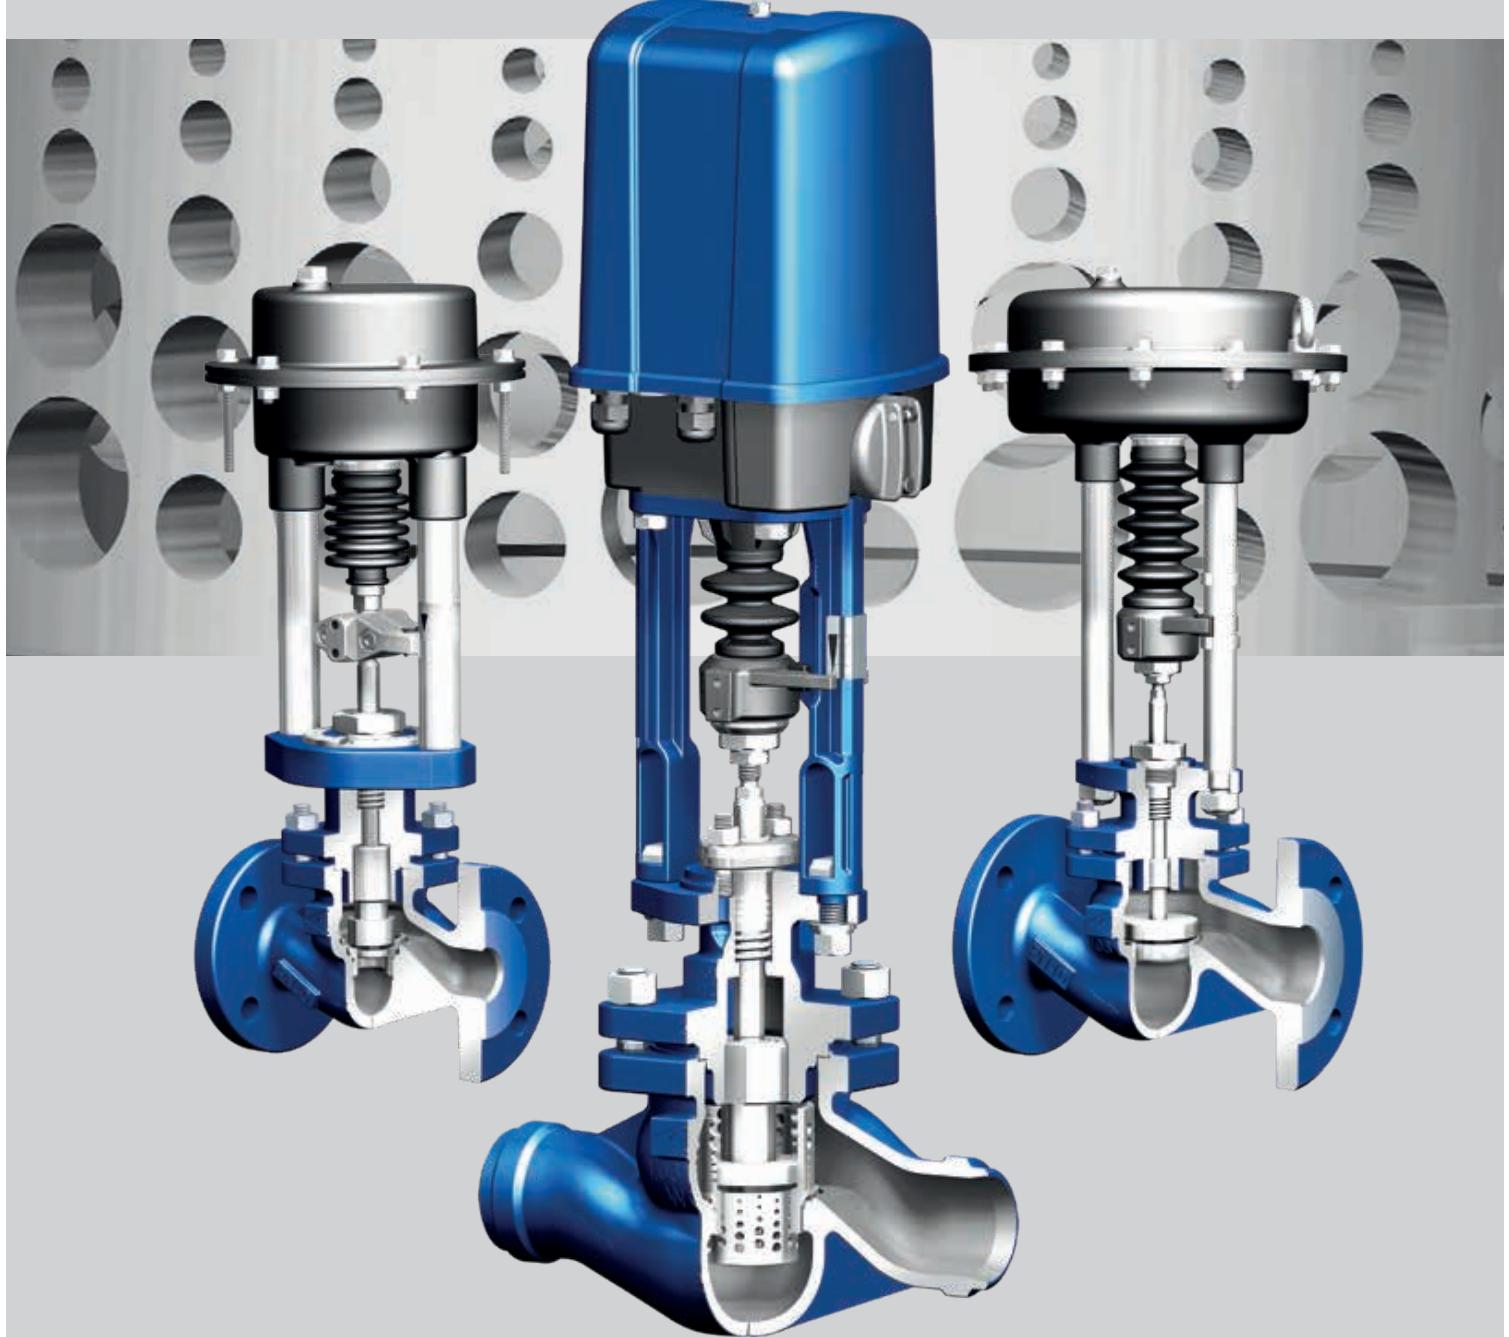

Tel: +298 407000 | sales@kj.fo

 ARI ARMATUREN



**Parker Distributor**  
Tel: +298 407000  
[sales@kj.fo](mailto:sales@kj.fo)

**Your needs . . .**

**BETA MARINE**

**Seagoing**

**Saildrives**

**Inland Waterways**

**Marine Generating Sets**

**Spares & Support**



- 36 years of customer centred focus, listening to needs & delivering long term value solutions.
- Specialists in customer advice & support at all points of a products voyage.
- Superb after-sales service via our approved national & international re-engine centres and authorised dealer network.
- Extensive range of 10 to 98 HP heat exchange propulsion engines with mechanical or hydraulic gearboxes.
- Optional secondary domestic 12V alternator or 3.5/5.0 kVA travel power.
- A range of 14 to 56 HP heat exchange propulsion engines with 2 saildrive solution options.
- Heat exchange Generating Sets 4 to 58 kVA with or without super silent acoustic housings.
- 5 year self-service warranty\*.

**. . . our tailored solutions  
delivering reliability and peace of mind**

\*Recreational use, terms & conditions apply.

**Beta Marine**

Tel: +298 407000  
[sales@kj.fo](mailto:sales@kj.fo)

# Your needs . . .

# BETA MARINE

Seagoing   Saildrives   Inland Waterways

Marine Generating Sets

Spares & Support


## Marine Generating Sets to 650 kVA

- Powered by: Beta Kubota, Baudouin, Cummins, Perkins or Scania marine diesel engines - heat exchanger, keel or radiator cooling.
- Acoustic housings designed to customer specifications.
- Manufactured to Classification Society requirements: Lloyds Register, Det Norske Veritas, Bureau Veritas, Germanisher Lloyd, ABS, CCS, etc.



## Marine Propulsion Engines 10 to 150 HP

- Built to your specification from our extensive menu of options.
- Optional bespoke CAD design and fabrication of installation feet.
- Factory engine installation service for your net or pot hauler hydraulic pump.
- Superb installation support and after sales service from our comprehensive national and international network.

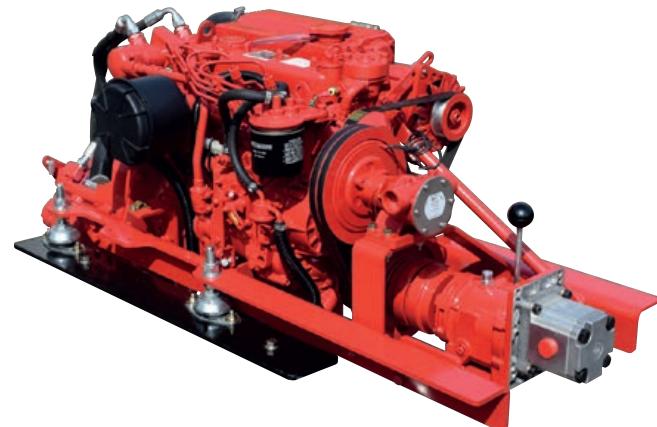

. . . our tailored solutions  
delivering reliability and peace of mind



[www.betamarine.co.uk](http://www.betamarine.co.uk)



**kj.fo**

[sales@kj.fo](mailto:sales@kj.fo)  
+298 40 70 00