



VØRUKATALOG

PRODUCT CATALOG

2024



KU HYDRAULIK
POWER & MOTION CONTROL



UM KJ

ABOUT KJ

Síðani stovnan felagsins í 1978, hevur KJ havt støðugan vøkstur og staðið í menning. Við umleið 150 starvsfólkum, sjei deildum í Føroyum og Danmark, umframt einum vaksandi kundaskarða í Føroyum, Íslandi, Hetlandi og Noregi, er KJ ein álitandi og viðurkendur veitari í Norður-atlandshavinum.

Fyrirøka okkara, KJ, staðfestur styrki í útinnaði trúfesti til góðsku og framburð. Vit standa trúfæst í vinnuni, ikki einans í okkara eginleika at veita hágóðsku vørur og tænastur, men eisini tí, at okkara lyfti er, at veita trivnaðarfremjandi arbeiðsumhvørvi, ið eggjar til besta avrik frá okkara starvsfólki.

Fyri okkum er starvsfólk okkara grundarsteinurin undir okkara virkseimi. Tískil er okkara vøkstur og menning treytað av teirra eydnu. Við at gera íløgur í okkara starvsmegi og við at menna okkara starvsmentan, vaksa vit um nýhugsan, samstarv og áhaldandi lærdóm, samstundis sum vit ferð eftir ferð liva upp til krøvini, ið vinnan setur okkum.

KJ er ein dynamisk fyrirøka við einum sterkum toymi, ið arbeiða innan trýggjar høvuðsgeirar. Fyrirøkan er væl umboðað í sjóvinnuni, har vit spæla ein týðningarmiklan leiklut í flutningi, goymslu og tilhoyrandi tænastum. Harafturat er KJ á serstakari rók í alivinnuni har dentur verður settur á hágóðsku framleiðslu og arbeiðslag. Okkara virkseimi á landi, er triði høvuðsgeirin. Her veita vit maskinur innan byggivinnuna og tilhoyrandi lutir.

Since its foundation in 1978, KJ has witnessed substantial growth and development. With roughly 150 staff members, 7 departments in the Faroe Islands and Denmark and a growing clientele in the Faroe Islands, Iceland, Shetland and Norway, KJ is a well-established and trusted supplier in the North Atlantic.

Our company, KJ, stands as a testament to the power of unwavering commitment to quality and the pursuit of excellence. We owe our prominence in the industry to not only our ability to deliver superior products and services but also our pledge to foster a work environment that encourages peak performance from our dedicated team.

We believe that our employees are the backbone of our enterprise, and their growth and development are integral to our overall success. By investing in our workforce and cultivating a culture that values innovation, collaboration, and continual learning, we are able to consistently meet and exceed industry standards.

KJ is a diversified business entity with a robust operational framework that spans across three major sectors. The company has a significant presence in the Maritime sector, playing a vital role in shipping, logistics, and maritime services. Additionally, KJ has carved out a substantial niche for itself in aquaculture, focusing on sustainable fish farming practices and contributing to the stability of food resources. Lastly, the industrial activities on land comprise the third pillar of KJ's operations, with the company engaging in construction machinery, logistics equipment and various industrial services.



UM KJ
ABOUT KJ

GOYMSLAN

THE WAREHOUSE

KJ er sum veitari sera errin av, og raðfestur høgt, at hava eina sterka goymslu. Við meir enn 25.000 ymiskum vørum til vinnuna, eru vit klár at liva upp til krøv frá okkara kundum. Harvið tryggja vit, at vit eru ein viðspælari til vinnuna. Um ein kundi ynskir eina vøru, ið ikki er á goymslu í tí løtu, hon verður umbiðin, leypur okkara sterka toymi heilhjartað í aktión. Har verður okkara serkunnleiki prógvaður og okkara sterka netverk gagnnýtt. Á hendan hátt stytta vit um biðitíðina hjá kundinum.

Harafturat er söludeildin hjá KJ mannað av dugnaligum sölufólki, ið altíð er klár at hjálpa og ráðgeva, soleiðis at kundin fær júst tað, honum tørvar. Okkara serkunnleiki er innan eitt sera stórt úrval av vørum, og prógvar hetta, at okkara netverk og okkara arbeiðsmegi er inngrógvin í okkara tænastu.

Um tú hevur ein fyrispurning, skalt tú vera hjartaliga vælkomín at ringja til okkara sölubúð ella at ringja til sölutoymið, beinleiðis á +298 40 70 00. Eisini ert tú vælkomín at senda teldupost á soludeild@kj.fo. Eitt sölufólk verður skjótt sett á sakina, so tú fært tín tørv næktaðan.

KJ prides itself on an extensive and diverse inventory that encompasses an impressive array of over 25,000 unique items tailored to the maritime industry. Our store is fully stocked to meet the immediate needs of our customers, ensuring that we serve as a one-stop shop for maritime supplies. If, on the rare occasion, a client requires a product that is not readily available in our inventory, our dedicated team springs into action, utilizing their expertise and extensive network to procure the item posthaste, thereby minimizing any potential downtime for our customers.

Furthermore, KJ's sales department is staffed by skilled sales engineers and they are prepared and eager to assist in the selection process, ensuring that every customer finds precisely what they require for their maritime operations. Our capacity to procure a vast range of products is a testament to the robust connections and resourcefulness embedded in our service ethos.

For any inquiries or specialized service requests, customers are encouraged to reach out to our store or contact the sales department directly at +298 40 70 00, or send an email to sales@kj.fo. A sales engineer will promptly engage with you to facilitate your needs.

Tel +298 40 70 00
T-post soludeild@kj.fo

Bústaður
Fagragil 2
530 Kambsdalur
Føroyar

Tel +298 40 70 00
E-mail sales@kj.fo

Address
Fagragil 2
530 Kambsdalur
Faroe Islands





INNIHALDSYVIRLIT


TABLE OF CONTENTS



INNIHALDSYVIRLIT

TABLE OF CONTENTS

INDUSTRISLANGUR	9	SEPERATORAR	53
INDUSTRIAL HOSES		SEPERATORS	
FISKASLANGUR OG FITTINGS	21	LUFT	55
FISH PUMP HOSES AND FITTINGS		PNEUMATICS	
HYDRAULIKKSLANGUR	25	KEMI	59
HYDRAULIC HOSES		CHEMICALS	
RØR- OG SLANGUFITTINGS, HYDRAULIKKUR	29	KEMI	63
PIPE AND HOSE FITTINGS, HYDRAULICS		CHEMISTRY	
FILTUR OG FILTURHÚSAR	33	RØR- OG SLANGUKLEMMUR	69
FILTERS AND FILTER HOUSINGS		TUBE AND HOSE CLAMPS	
HYDRAULISKAR PUMPUR OG MOTORAR	39	RØRFITTINGS	73
HYDRAULIC PUMPS AND MOTORS		TUBE FITTINGS	
VATNPUMPUR	43	RØR	77
WATER PUMPS		TUBES	
LEGUR OG TRANSMISSIÓNIR	47		
BEARINGS AND TRANSMISSIONS			
INDUSTRI- VENTILAR	49	ALFABETISKT INNIHALDSYVIRLIT	81
INDUSTRY VALVES		TABLE OF CONTENTS IN ALPHABETICAL ORDER	

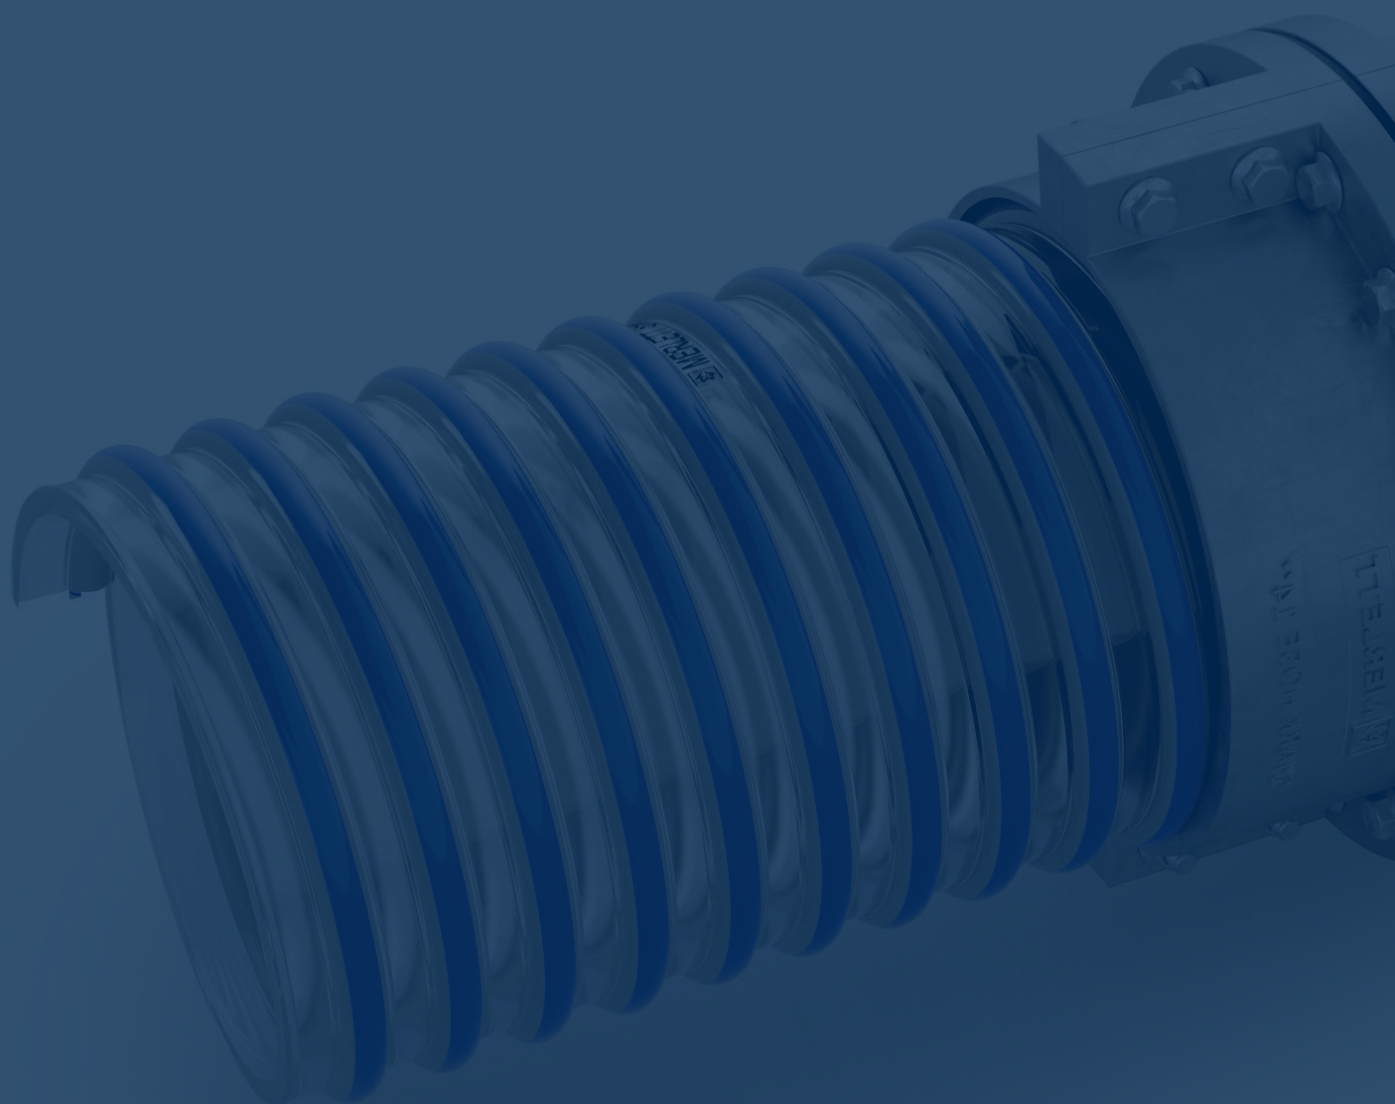



INDUSTRISLANGUR

INDUSTRIAL HOSES



LUISIANA SUPERELASTICS

LUISIANA SUPERELASTICS

Spiralsúgvislanga úr PVC plasti, við stívum PVC spirali. Til gjøgnumrenning og súgving av ymiskari vætu. Fæst bæði við hvítum og grønum spirali. Slangan er klár og gløtt innvendiga.

PVC hose with rigid PVC spiral, for delivery and suction of liquids. Available in both white and green spiral. The hose is transparent and smooth surface inside.



Ø NOMINAL Ø NOMINAL	Ø NOMINAL Ø NOMINAL	INNARI DIAMETUR Ø I.D.	UTTARI DIAMETUR Ø O.D.	ARBEIÐSTRÝST WORKING PRESSUR	VAKUUM VACUUM	BRESTIPUNKT BURSTING PRESS.	TOTAL TJÚKT TOTAL THICKNESS	VEKTMETUR WEIGHT METER
mm	inch	mm	mm	bar	m/H ₂ O	bar	mm	g/m
19		19	24,6	6,5	7	19,5	2,8	250
20		20	26,2	6,5	7	19,5	3,1	275
25	1	25	31,6	6,5	7	19,5	3,3	330
30		30	37	5,5	7	16,5	3,5	420
32	1 1/4	32	39,2	5,5	7	16,5	3,6	460
35		35	41,8	5	7	15	3,4	500
38	1 1/2	38	45,4	4,5	7	13,5	3,7	550
40		40	47,8	4,5	7	13,5	3,9	610
45	1 3/4	45	52,8	4	7	12	3,9	670
50	2	50	58,2	3,5	7	10,5	4,1	810
51	2	51,3	59,5	3,5	7	10,5	4,1	810
55		55	63,6	3,5	7	10,5	4,3	860
60		60	69	3,5	7	10,5	4,5	970
63	2 1/2	63	71,2	3,5	7	10,5	4,1	1040
70		70	79	3,5	7	10,5	4,5	1200
75		75	85,4	2,5	7	7,5	5,2	1380
76	3	76	86	2,5	7	7,5	5	1380
80		80,2	90,8	2,5	7	7,5	5,3	1560
90	3 1/2	90	100,4	2,5	7	7,5	5,2	1800
100		100	112	2,5	7	7,5	6	2160
102	4	102,3	113,9	2,5	7	7,5	5,8	2200
110		110	122	2,5	5	7,5	6	2400
120		120	132,4	2,5	5	7,5	6,2	2850
125		125	137,6	2	5	6	6,3	3130
127	5	127	140,6	2	5	6	6,8	3130
150		150	164,4	2	5	6	7,2	4250
152	6	152,4	167,2	2	5	6	7,4	4250
200		200	218,2	1	5	3	9,1	6400
204	8	203,2	221,2	1	5	3	9	6400

Notes:

Bending radius: According to UNI EN ISO 10619- 1, A1.

OREGON PU PS REYÐ

OREGON PU PS RED

Spiralsúgvislanga við reyðum PVC spirali. Verður mest nýtt til fiskaflutning. Slangan er klár og gløtt innvendiga.

Spiral hose with PVC-made spiral in red. Mostly used for transport of fish. The hose is transparent and smooth surface inside.



Ø NOMINAL Ø NOMINAL	Ø NOMINAL Ø NOMINAL	INNARI DIAMETUR Ø I.D.	UTTARI DIAMETUR Ø O.D.	ARBEIÐSTRÝST WORKING PRESSURE	VAKUUM VACUUM	TOTAL TJÚKT TOTAL THICKNESS	TJÚKT Á VEGGI MIN DEPTH PU	VEKTMETUR WEIGHT METER
mm	inch	mm	mm	bar	m/H ₂ O	mm	mm	g/m
51	2	51,2	60,7	1,5 (*)	6 (*)	4,8	0,8	600
63	2 1/2	62,5	71,3	1,3 (*)	5,5 (*)	4,4	0,8	680
76	3	76,6	86,4	1,3 (*)	5,5 (*)	4,9	0,8	800
89	3 1/2	89,7	100,7	1,3 (*)	5,5 (*)	5,5	0,8	1120
102	4	102,8	114,8	1	5 (*)	6	0,9	1200
110		110	122	1	5 (*)	6	1	1270
127	5	128	142	1	5 (*)	7	0,8	1800
152	6	152,2	165,8	0,7	4,5 (*)	6,8	0,6	2000
160		160	176	0,7	4,5 (*)	8	1	2250
200		200	216,2	0,5	4 (*)	8,1	0,9	3100
203	8	203	220,2	0,5	4 (*)	8,6	1	3300
250		250	270,6	0,3	4 (*)	10,3	1,7	3900

Notes:

Working and bursting pressure: according to ISO 1402

Bending radius at 23°C: According to UNI EN ISO 10619-1, A1

OREGON PU PS BLÁ

OREGON PU PS BLUE

Spiralsúgvislanga við bláum PVC spirali. Verður mest nýtt til fiskaflutning. Slangan er klár og gløtt innvendiga.

Spiral hose with PVC-made spiral in blue. Mostly used for transport of fish. The hose is transparent and smooth surface inside.



Ø NOMINAL Ø NOMINAL	Ø NOMINAL Ø NOMINAL	INNARI DIAMETUR Ø I.D.	UTTARI DIAMETUR Ø O.D.	ARBEIÐSTRÝST WORKING PRESSURE	VAKUUM VACUUM	TOTAL TJÚKT TOTAL THICKNESS	TJÚKT Á VEGGI MIN DEPTH PU	VEKTMETUR WEIGHT METER
mm	inch	mm	mm	bar	m/H ₂ O	mm	mm	g/m
50,8	2	50,8	58,8	0,6	4,5	4	0,8	460
63,5	2 1/2	63,5	72,5	0,6	4,5	4,5	0,8	580
76	3	76,2	84,4	0,6	4,5	4,2	0,9	700
90		90	99,2	0,5	4,5	4,6	0,9	900
102	4	101,6	111,6	0,5	4,5	5	1	1050
110		110	121,4	0,5	4	5,7	1	1200
127	5	127	138,6	0,5	3,5	5,8	1,1	1400
152	6	152,4	165,4	0,5	2,5	6,5	1,1	1800
160		160	173,6	0,4	1,5	6,8	1,1	2000
203	8	203,2	218	0,3	1	7,4	1,2	2700
254	10	254	270	0,2	1	8	1,7	3900
305	12	305	321	0,2	1	8	2	4800

Notes:

Working and bursting pressure: according to ISO 1402

Bending radius at 23°C: According to UNI EN ISO 10619-1, A1

SUPERFLEX PU R

SUPERFLEX PU R

PU spiralslanga við styrktum koparspirali. Til gjøgnumrenning av dusti og brúningarevni. Verður nógv nýtt innan súgving av sandi og fóðri. Slangan er klár.

POLYURETHANE (PU) hose with copper-plated steel spiral, for suction and transport of dust, chips and abrasive material. The hose is transparent.




INNARI DIAMETUR Ø NOMINAL	INNARI DIAMETUR Ø NOMINAL	UTTARI DIAMETUR Ø O.D.	VAKUUM VACUUM	TJÚKT Á VEGGI WALL THICKNESS	Ø, STÁLVEIRUR Ø STEEL WIRE	MÁT MILLUM SPIRALAR SPIRAL PITCH	VEKTMETUR WEIGHT METER
mm	mm	mm	m/H ₂ O	mm	mm	mm	g/m
30	31	35	5,5	0,5	1	10	140
35	36	40	5	0,5	1	10	160
38	39	43	4,8	0,5	1	9,8	180
40	41	45	4,5	0,5	1	10	200
45	46	50	4	0,5	1	10	220
50	51	55	3,5	0,55	1,2	12	280
55	56	60	3	0,55	1,2	12	300
60	61	65	3	0,55	1,2	12	330
63	64	68	2,5	0,55	1,2	12	350
70	71	77	2,5	0,6	1,4	14	420
75	76	82	2	0,6	1,4	14	440
80	81	87	2	0,6	1,4	14	480
85	86	92	2	0,6	1,4	14	500
90	91	97	2	0,6	1,4	14	520
100	101	107	1,5	0,65	1,6	16	660
110	111	117	1,5	0,65	1,6	16	720
120	121	127	1,5	0,65	1,6	16	780
125	126	132	1,5	0,65	1,6	16	800
128	128,5	134,5	1,5	0,65	1,6	16	820
130	131	137	1,5	0,65	1,6	16	840
140	141	147	1,5	0,65	1,6	16	900
150	151	157	1	0,7	1,8	18	1100
160	161	167	1	0,7	1,8	18	1160
170	171	177	1	0,7	1,8	18	1240
173	173	179	1	0,7	1,8	18	1250
180	181	187	1	0,7	1,8	18	1300
200	201	207	1	0,7	1,8	18	1440
220	221	227	0,5	0,7	1,8	18	1580
225	226	232	0,5	0,7	1,8	18	1620
250	252	259	0,5	0,8	2	22	1880
280	282	289	0,5	0,8	2	22	2100
300	302	309	0,4	0,8	2	22	2250
325	327	334	0,4	0,8	2	22	2450
350	352	359	0,4	0,8	2	22	2600
400	402	409	0,4	0,8	2	22	3000
450	452	459	0,4	0,8	2	22	3350

SHARK SLAGA

SHARK HOSE

Spiralsúgvislanga úr PVC plasti, við stívum og stoyt-dyggum PVC spirali. Verður mest nýtt til fiskaflutning. Slangan er klár og gløtt innvendiga.

PVC hose with PVC rigid shockproof spiral, for fish farming and carrying fish products. The hose is smooth on the inside and transparent.

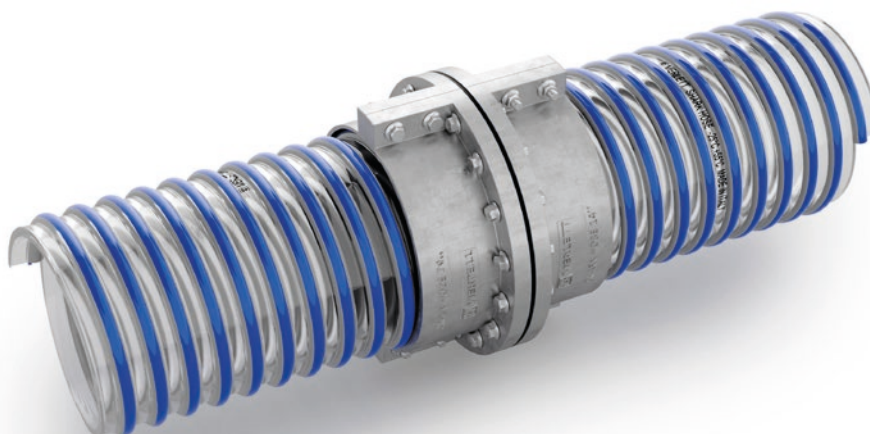

Ø NOMINAL Ø NOMINAL	Ø NOMINAL Ø NOMINAL	INNARI DIAMETUR Ø I.D.	UTTARI DIAMETUR Ø O.D.	ARBEIÐSTRÝST WORKING PRESSURE	VAKUUM VACUUM	BRESTIPUNKT BURSTING PRESS.	TJÚKT Á VEGGI MIN DEPTH PU	VEKTMETUR WEIGHT/METER
mm	inch	mm	mm	bar	m/H ₂ O	bar	mm	g/m
102	4	101,6	120	2,5	9	7,5	9,2	3250
152	6	152,4	175,4	2	9	6	11,5	5600
203	8	203,2	230	2	9	6	13,5	9200
254	10	254	290	1,5	9	4,5	18	14500
305	12	304,8	344,8	1,5	9	4,5	20	19000
355	14	356	396	1,25	9	3,7	20	22000
407	16	407	450	1	9	3	21,5	28000

Viðmerkingar/Notes:

Arbeiðs- og brestipunkt: Sambært ISO 1402

Radius á bendi á 23 °C: Sambært UNI EN ISO 10619-1, A1

Vakuüm móttæðufæri: Sambært royndum ILLAB018

Working and bursting pressure: according to ISO 1402

Bending radius at 23°C: According to UNI EN ISO 10619-1, A1

Vacuum resistance: According to test method ILLAB018



JAMAICA HD

JAMAICA HD

Flatliggjandi slanga úr NBR gummi, við polyester styrk-
ningi. Mótstöðufør mótvegis trýsti frá vætu og oljum.

Flexible layflat NBR hose with polyester yarn reinforce-
ment, resistant to elongation, for pressurized delivery
of liquids and oils.




Ø NOMINAL Ø NOMINAL	INNARI DIAMETUR Ø I.D.	ARBEIÐSTRÝST WORKING PRESSURE	BRESTIPUNKT BURSTING PRESS.	TOTAL TJÚKT TOTAL THICKNESS	VEKTMETUR WEIGHT METER	BROTSTYRKI TENSILE BREAKING LOAD
mm	mm	bar	bar	mm	g/m	kg
20	20	30	90	min. 2,2	215	1200
22	22	30	90	min. 2,2	230	1200
25	25	30	90	min. 2,1	245	1350
27	27	30	90	min. 2,1	260	1350
32	32	27	80	min. 2,0	310	1900
38	38	21	62	min. 2,1	375	2200
42	42	21	62	min. 2,1	395	2400
45	45	21	62	min. 2,1	395	3300
52	52	17	52	min. 2,0	470	4300
55	55	17	52	min. 2,0	470	4450
63	63	17	52	min. 2,2	600	5100
70	70	17	50	min. 2,2	650	6500
75	75	17	50	min. 2,2	710	7000
78	78	17	50	min. 2,2	710	7200
80	80	15	45	min. 2,2	760	7600
90	90	15	45	min. 2,3	930	9200
102	102	15	45	min. 2,4	1000	10500
104	104	15	45	min. 2,4	1080	10500
110	110	13	40	min. 2,4	1100	11000
115	115	13	35	min. 2,4	1180	11500
125	125	15	45	min. 2,8	1450	14000
150	150	13	35	min. 2,7	1700	16500
156	156	13	35	min. 2,7	1700	16500
204	204	12	35	min. 3,5	3000	20300
254	254	10	28	min. 3,5	3500	24100
304	304	10	26	min. 3,5	3700	30300

ASPIR PU/H

ASPIR PU/H

Spiralsúgvislanga við bláum PVC spirali. Bleyt, liðilig og lætt at arbeiða við. Slangan er klár og glætt innvendiga.

Spiral hose with PVC-made spiral in blue. Soft, flexible and easy to handle. The hose is transparent and smooth inside.

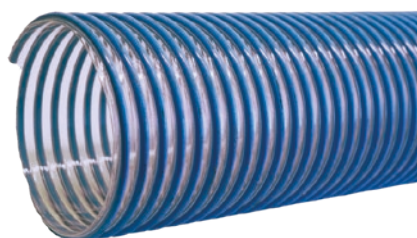

INNARI DIAMETUR INSIDE DIAMETER	UTTARI DIAMETUR OUTSIDE DIAMETER	GÓÐSTJÚKT TOTAL THICKNESS BETWEEN SPIRALS SI	VEKT WEIGHT	VINKULRADIUS BENDING RADIUS
mm	mm	mm	kg/m	mm
76	88	1	1,05	220
90	103	1,15	1,26	225
102	115	1,15	1,45	250
110	123	1,15	1,6	270
127	141	1,2	1,8	320
152	167	1,2	2,5	380
160	176	1,2	2,65	400
203	220	1,2	3,5	500
254	274	1,4	5,1	650
305	329	1,5	6,45	750

FLEXFAB KØLIVATNSSLANGA

FLEXFAB COOLING WATER HOSE

Kølivatnsslanga úr silikon, við innbyggðum nylon. Verður brúkt til kølivatn og hitaanlegg. Tolir úr -54 °C upp til 177 °C og 7 bar trúst. KJ hevur úr 8mm upp til 25mm á goymslu.

Cooling water hose made out of silicone, with built-in nylon. Is used in cooling water and heat exchangers. Can manage from -54 °C up to 177 °C and up to 7 bar pressure. KJ keeps from 8mm up to 25mm on stock.



Litur Color	Blátt / Blue
Slangutypa Hose type	1-ply
Arbeiðsrúst Working pressure	7 bar
Trúst hámark Max pressure	20,7 bar
Hitið Temperature	-54°C + 177°C
Tilfar Material	Syntetískt silikongummi (Q) / Synthetical silicone rubber
Standard Standard	SAE J20 R3 Class A

ASPIROIL

ASPIROIL

Aspiroil oljusúgvi-returslanga við innbygðum stálspirali. Kann nýtast til blýfrítt, olju, diesel, feitt, smyrjilju og vatn. Innara lagið er úr NBR og utan lagið er úr kloropren gummi (CR), ið er mótstöðuført ímóti olju- og hitaávirkan. Tolir úr -30 °C upp til 120 °C og 10 bar trúst. KJ veitur úr 3/4" til 3" av hesi slangu.

Aspiroil oil-suction hose with built-in steel spiral. Can be used for petroleum, oil, diesel, fats, lubricants and water. The inner layer is made out of NBR and the outer layer chloropren rubber (CR), which makes it resistant when exposed to oil and heat. Can withstand -30 °C up to 120 °C with 10 bar pressure. KJ keeps from 3/4" up to 3" sizes of this hose on stock.



Tilfar innan Material inside	120°C (vatn) 248 °F (Water), 120 °C (Water)
Tilfar utan Material outside	120°C (vatn) 248 °F (Water), 120 °C (Water)
Hiti Temperature	Syntetiskt gummi Synthetic Rubber
Arbeiðstrúst Working pressure	Dupultflættaður veirur 2 Braids of High Tensile Wire
Hámarkstrúst Max temperature	Hátrústs vatnreinsarir High Pressure Water Cleaners

MULTI OIL

MULTI OIL

Hendan slætta og haldbara slangan úr NBR/PVC, kann nýtast til olju, diesel, biodiesel upp til 20%, blýfrítt og til onnur líknandi evni. Kann nýtast til ozon. Tolir úr -25 °C upp til 80 °C og 20 bar trúst. KJ hevur úr 6mm upp til 25mm á goymslu.

This smooth yet tough hose is made out of NBR/PVC. It can be used for oil, diesel, biodiesel up to 20%, petroleum and other chemicals alike. It can be used for ozon as well. Can withstand from -25 °C up to 80 °C and 20 bar pressure. KJ holds sizes 6mm up to 25mm on stock.



Nýtsluøki Area of use	Luft, Biodiesel 20% B20, Diesel, Bensin, Bensin E15, Feitt, Olju, Vatn / Air, Biodiesel 20% B20, Diesel, Gasoline, Gasoline E15, Grease, Oil, Water
Litur Color	Svart / Black
Slangustødd Hose size	6mm - 25mm
Góðs Material	NBR, PVC
Brestipunkt Pressure burst min.	60 bar
Max trúst Pressure max.	20 bar
Mesta hitastig Temperature max	+80 c
Minsta hitastig Temperature min.	-25 c

VATNSLANGA 1220

WATERHOSE 1200

Sera haldbar og sterk slanga, til loft og vatn. Mótstöðuför ímóti stoyti og óslöttum flatum. Verður nýtt sum spulislanga til sjóidnaðin, umframt á landi. Slangan er styrkt við flættaðum polyestertráði. Longdir á rullum eru 40 metrar. Tolir úr -30 °C upp til 80 °C og 20 bar trýst.

Especially tough and durable hose for pneumatics and water. Resistant to impact and rough surfaces. Is used as a water hose for action on sea and on land. The hose is reinforced with braided polyester thread. Length of rolls is 40 meters. Can withstand from -30 °C and up to 80 °C and 20 bar pressure.



INNARI DIAMETUR INSIDE DIAMETER	UTTARI DIAMETUR OUTSIDE DIAMETER	ARBEIDSTRÝST WORKING PRESSURE	BREISTIPUNKT BURSTING PRESS	VINKULRADIUS BENDING RADIUS	VEKT WEIGHT
mm	mm	bar	bar	mm	g/m
13,0	22,6	20	64	120	500
16,0	26,0	20	64	150	600
19,0	29,4	20	64	180	670
25,0	36,2	20	64	250	930
32,0	45,6	20	64	320	1,3
38,0	51,6	20	64	350	1,49
45,0	59,4	20	64	450	1,95
51,0	65,4	20	64	500	2,18
63,0	77,0	20	64	600	2,61
76,0	91,6	20	64	900	3,1
90,0	106,0	20	64	1.05	4,7
102,0	118,0	20	64	1.15	5,19

SUPERJET HÁTRÝSTS

SPULISLANGA

SUPERJET HIGH-PRESSURE WATER HOSE

Superjet hátrýstsspulislanga frá Parker við tveytáttaðum stálveiri, er serliga gjörd til hátrýsts vatnreinsarir. Kann nýtast til konstant vatn við upp til 120 °C og klárar trýst upp til 400 bar.

Superjet high pressure water hose from Parker, braided with double steel wires. Made especially for high pressure water washers. Can be used with constant water up to 120 °C with a pressure up to 400 bar.



Hámark fyri hitastig undir arbeiði Maximum Operating Temperature	120°C (vatn) 248 °F (Water), 120 °C (Water)
Hámark fyri hitastig undir arbeiði Maximum Operating Temperature	120°C (vatn) 248 °F (Water), 120 °C (Water)
Góðs, innara síða Hose Inner Tube Material	Syntetískt gummi Synthetic Rubber
Styrkigóðs á slangu Hose Reinforcement Material	Dupultflættaður veirur 2 Braids of High Tensile Wire
Nýtsla Application	Hátrýsts vatnreinsarir High Pressure Water Cleaners
Slanguverja Hose Cover Type	Blátt, syntetískt gummi Blue synthetic rubber
Max arbeiðstrýst Maximum Operating Pressure	40 MPa, 5800 psi, 400 bar 40 MPa, 5800 psi, 400 bar

AQUAFLEX

AQUAFLEX

Aquaflex HD vakumslanga. Slangan verður veitt við innbyggðum/vulkaniseraðum PN10 flansa í hvörjum enda. Slangan verður veitt við trýkantsprofili úr stáli, ið er innbyggður í slanguni. Flansarnir eru í rustfríum stáli AISI304. KJ veitir alt úr 10" upp í 24" av hesi slangu og verður nýtt til fiskaflutning.

Aquaflex HD vacuum hose. The hose is delivered with built-in vulcanized PN10 flange in each end. The hose is also supplied with built-in triangled steel profile. The flanges are in stainless AISI304 steel. KJ offers from 10" and up to 24" sizes of this hose and is used for fish transportation.



INNARI DIAMETER INSIDE DIAMETER	UTTARI DIAMETER OUTSIDE DIAMETER	LONGD LENGTH	BRESTIPUNKT BURSTING PRESS
mm	inch	m	kg
254	10	10	214
254	10	12	250
305	12	6	180
305	12	10	280
305	12	12	330
355	14	6	236
355	14	10	367
355	14	12	434
406	16	6	285
406	16	10	445
406	16	12	525
457	18	10	544
457	18	12	640
508	20	10	670
508	20	12	831
600	24	10	920
600	24	12	1080

FÓÐURSLANGA

ANTISTATIC FISH FEEDING PIPE

Hendan anti-statiska fódurslangan er framleidd við sergjördari tækni. Slangan dálkar ikki og kann endurnýttast. Hon er trygg at nýta bæði hjá fólki og fiski. Hon er eyðkend fyri at vera roynd endurtakandi ferðir fyri at tryggja góðskuna.

This antistatic fish feeding pipe is a long service-life hose with unique technology. The hose does not pollute and is recyclable. Safe for humans and fish and has qualitative value, since it is being continuously tried and tested.

STØDD DIMENSION	SDR SDR	LONGD LENGTH
mm	SDR	m
90	11, 13,6 & 17	350
63	11, 13,6 & 17	350



RAGNO ACQUA

RAGNO ACQUA

PVC slanga úr styrktum polyestertráði og millumliggjandi PU límlagi, so slangan gerst mótstöðuför ímóti trýsti. Hendan slangan verður nýtt til fiskaframleiðslu. Hon tolur úr -5 °C upp í 60 °C og arbeiðstrýst upp til 20 bar.

PVC hose with polyester yarn reinforcement and intermediate PU adhesive layer for delivery of food liquids under pressure. This hose is a perfect solutions for fish factories. Temperature range of the hose is -5 °C up to 60 °C and working pressure up to 20 bar.



INNARI DIAMETUR Ø NOMINAL	INNARI DIAMETUR Ø NOMINAL	INNARI DIAMETUR Ø NOMINAL	UTTARI DIAMETUR Ø O.D.	ARBEIÐSTRÝST Á 23°C WORKING PRESSURE AT 23°C	ARBEIÐSTRÝST Á 40°C WORKING PRESSURE AT 40°C	ARBEIÐSTRÝST Á 60°C WORKING PRESSURE AT 60°C	BRESTIPUNKT BURSTING PRESS	TOTAL TJÚKT TOTAL THICKNESS
mm	inch	mm	mm	bar	bar	bar	bar	m
4		4	10	20	16	12	60	3
5	3/16	5	11	20	16	12	60	3
6	1/4	6	11	20	16	12	60	2,5
6	1/4	6	12	20	16	12	60	3
6	1/4	6	14	20	16	12	60	4
7		7	13	20	16	12	60	3
8	5/16	8	13	18	13	9	54	2,5
8	5/16	8	14	18	13	9	54	3
9		9	15	18	13	9	54	3
10	3/8	10	15	18	13	9	54	2,5
10	3/8	10	16	18	13	9	54	3
12		12	17	12	9	6	36	2,5
12		12	18	12	9	6	36	3
13	1/2	13	18	12	9	6	36	2,5
13	1/2	13	19	12	9	6	36	3
15		15	21	10	7	4	30	3
15		15	23	10	7	4	30	4
16	5/8	16	21	10	7	4	30	2,5
16	5/8	16	22	10	7	4	30	3
19	3/4	19	25	10	7	4	30	3
19	3/4	19	26	10	7	4	30	3,5
22		22	30	8	5	3	24	4
25	1	25	32	8	5	3	24	3,5
25	1	25	33	8	5	3	24	4
30		30	38	8	5	3	24	4
32	1 1/4	32	42	8	4	2	24	5
35		35	45	8	4	2	24	5
38	1 1/2	38	48	8	4	2	24	5
40		40	50	8	4	2	24	5
50	2	50	62	8	4	2	24	6

RAGNO N 20 BAR (LIFT-UP)

RAGNO N 20 BAR (LIFT-UP)

PVC slanga við styrktum polyestertráði og PU límlagi. Verður brúkt til lift-up í alivinnuni.

PVC hose with polyester yarn reinforcement and PU adhesive intermediate layer used for lift-up in the land-based aquaculture industry.



INNARI DIAMETUR Ø NOMINAL	INNARI DIAMETUR Ø NOMINAL	INNARI DIAMETUR Ø NOMINAL	UTTARI DIAMETUR Ø O.D.	ARBEIDSTRÝST Á 23°C WORKING PRESSURE AT 23°C	ARBEIDSTRÝST Á 40°C WORKING PRESSURE AT 40°C	ARBEIDSTRÝST Á 60°C WORKING PRESSURE AT 60°C	VEKTMETUR WEIGHT METER	KVEYL LONGD COIL LENGTH
mm	inch	mm	mm	bar	bar	bar	g/m	m
6		6	12	20	16	12	115	100
8	5/16	8	13	20	16	12	110	100
8	5/16	8	13,8	20	16	12	130	100
10	3/8	10	15	20	16	12	120	100
10	3/8	10	16	20	16	12	160	100
13	1/2	13	19	20	16	12	180	100
16	5/8	16	23	20	16	12	300	100
19	3/4	19	26	20	16	12	350	100
25	1	25	34	20	16	12	530	50

IQ LIFT-UP SLAGA

IQ LIFT-UP HOSE

Løtt og mótstöðufør súgvislanga til lift-up, ið verður brúkt í alivinnuni. Av svørtum EPDM og við polyamid spiralur.

Light-weight and resistant suction hose for lift-up, which is used in the aquaculture industry. Made of rubber coated fabric with black EPDM and polyamide EPDM rubber coated spiral.



INNARI DIAMETUR INSIDE DIAMETER	INNARI DIAMETUR INSIDE DIAMETER	VEKT WEIGHT	VINKULRADIUS BENDING RADIUS	KVEYL LONGD COIL LENGTH
mm	inch	kg/m	mm	m
51	2	0,54	70	10/20/40
63.5	2 1/2	0,58	80	10/20/40
76	3	0,83	95	10/20/40
80	3 5/32	0,87	100	10/20/40
90	3 35/64	0,93	105	10/20/40
102	4	0,98	110	10/20/40
127	5	1,3	130	10/20/40
152	6	1,58	140	10/20/40
203	8	2,08	185	10/20





A large, dark blue, coiled hose, likely for a fish pump, dominates the left side of the image. The hose is tightly wound into a spiral, showing its flexible nature and the ridges along its length. The background is a solid dark blue, creating a monochromatic effect.

FISKASLANGUR OG FITTINGS

FISH PUMP HOSES AND FITTINGS




FISKAPUMPUSLANGA

FISH PUMP HOSES

Fiskapumpuslanga úr 4" upp til 20", har fiskur verður pumpaður gjøgnum. Framleidd úr polymer, ið er av natúrligum gummi. Sera mótstøðufør ímóti sliti og skurðsli, skitnum vatni, organiskum oljum og petroleumsrestum.

Large diameter flat hose, through which fish is pumped from the underwater pump located in the mes, to the ship's holds. Made out of NR based polymer (Natural Rubber). Excellent for resistance to abrasion and cut wear, brackish water, organic oils and petroleum derivatives.

INNARI DIAMETUR Ø NOMINAL	INNARI DIAMETUR Ø NOMINAL	TJÚKT THICKNESS	ARBEIÐSTRÝST WORK PRESSURE		LONGD LENGTH
mm	inch	mm	psi	bar	m
102	4"	3	100	6,8	40
127	5"	3	100	6,8	40
152	6"	3,5	100	6,8	20 - 160
203	8"	3,5	85	5,9	20 - 160
203	8"	4,5	85	5,9	20 - 160
254	10"	3,5	70	4,8	20 - 160
254	10"	4,5	70	4,8	20 - 160
305	12"	5,5	55	3,8	20 - 160
305	12"	12	55	3,8	5 - 20
356	14"	12	45	3	5 - 20
356	14"	5,5	45	3	20 - 160
406	16"	5,5	45	3	20 - 160
406	16"	6	45	3	20 - 160
457	18"	5,5	35	2,4	20 - 160
457	18"	6	35	2,4	20 - 160
508	20"	5,5	35	2,4	20 - 160
508	20"	6	35	2,4	20 - 160

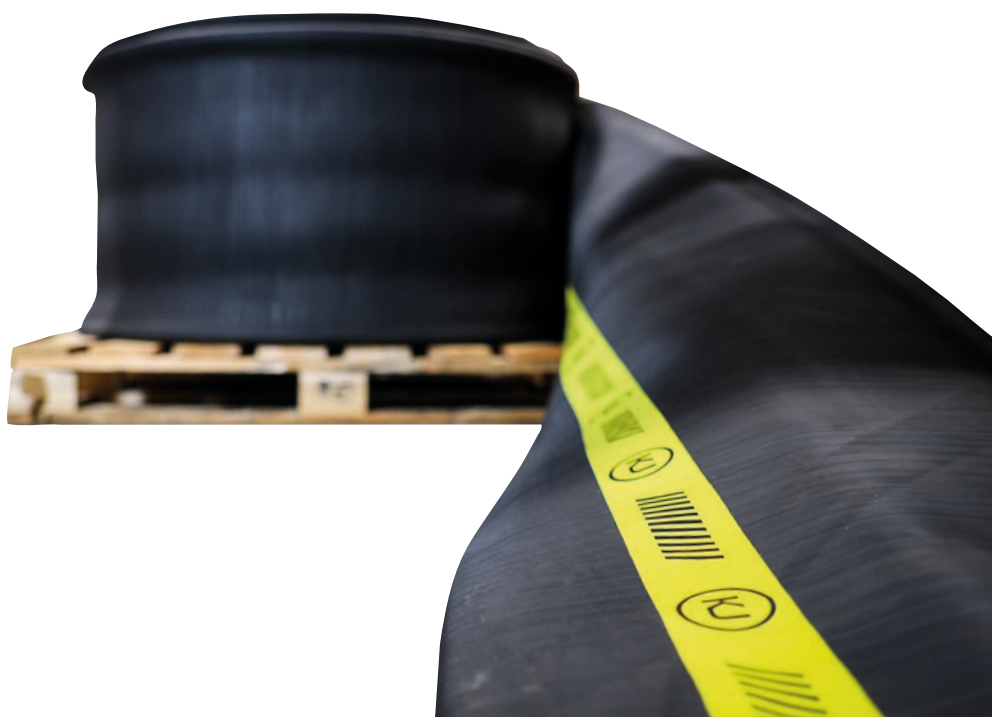

FISKASLANGUFITTINGS

FISH HOSE FITTINGS

SLANGUSTUSSUR

HOSE CONNECTOR

SLANGUKLEMMUR

HOSE CLAMP

SLANGUBEND

HOSE BEND

SNARKOBLING

QUICK RELEASE COUPLING

SLANGUREDUKTIÓN

HOSE REDUCTION

KJ hefur breitt úrval av fittings til fiskapumpuslangur, úr 12" upp til 20", á goymslu. Slanguklemmur eru á goymslu í bæði aluminium og rustfríum stáli. Vit hava bæði snarkobling við og utan pakning.

KJ has a wide range of fittings for fish pump hoses, from 12" up to 20" on stock. Hose clamps are in stock, in both steel and stainless steel. Quick release couplings are on stock, with or without seals.





SVØVIL

HOSE SWIVEL

KJ hefur aluminium og rustfríar svøvlar á goymslu. Rustfríu svøvlarnir eru við rullulegum og kunnu teir smyrjast.

KJ keeps both swivel in steel and stainless steel on stock. The stainless swivels are with bearings and can be lubricated.




SLANGUVØGGA, RUSTFRÍ

HOSE HOLDER, STAINLESS

KJ veitur rustfríar slanguvøggur úr 4" upp í 20". Vøggan er gjørd úr rustfríum rundstáli (AISI316) og hefur seks festishol. Kann nýtast til fiskaslangur og aðrar industri-slangur. Við hesum liggur slangan snøgt uppiá pláss, uttan vanda fyri skursli.

KJ delivers hose holders in stainless steel – from 4" up to 20". The hose holder is produced with stainless round steel (AISI316) and has six attaching holes. Can be used for fish hoses and other industry hoses alike. By using this, the hose is neatly put in place, with no risk of abrasion.

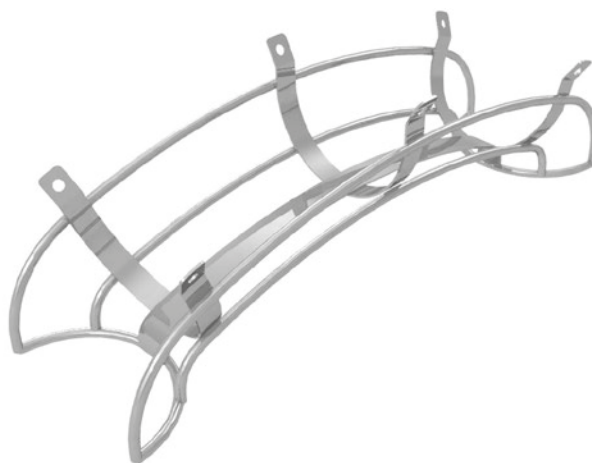



HYDRAULIKK- SLANGUR

HYDRAULIC HOSES





HYDRAULIKKSLANGA 462ST

HYDRAULIC HOSE 462ST

Hydraulikkslanga 462ST (Super Tough). Hesar 2-lag hydraulikkslangur eru framleiddar við útvendigari verju úr syntetiskum gummi, við sergjörðum polyethylene lagi. Hetta er sergjört til at tola sjógv og sól. Hesar slangur verða veittar við One-Piece fittings.

Hydraulic hose 462ST (Super Tough). These two-layered hydraulic hoses are produced with an outside cover made from synthetic rubber, with a special layer polyethylene. This is made to tolerate seawater and sun-light. These hoses are delivered with One-Piece fittings.



STØDD DIMENSION	ARBEIÐSTRÝST WORKING PRESSURE
inch	bar/psi
1/4"	425bar / 6160psi
3/8"	350bar / 5075psi
1/2"	310bar / 4495psi
3/4"	280bar / 4060psi
1"	210bar / 3045psi
1 1/4"	172bar / 2495psi
Umslag á slangu Hose cover type	Super Tough
Spesifikatióinir Specifications	EN 857, Type 2SC, ISO 11237
Útgáva av fittings Fittings series	46 Series & Series 48
Slangustyrking Hose reinforcement	Dupultlagaður veirur / 2 Braids of high tensile wire
Umslag (tilfar) Cover material	Syntetískt gummi við sermerktum polyethylen lagi / Synthetic rubber with a special polyethylene coating
Tilfar á innaru síðu Hose inner tube material	Nitril butadiene gummi (NBR) Nitrile butadiene rubber (NBR)
Max arbeiðshiti Maximum operating temperature	120 °C

HYDRAULIKKSLANGA 797ST

HYDRAULIC HOSE 797ST

Hydraulikkslanga 797ST (Super Tough). Hesar 4-lag hydraulikkslangur eru framleiddar við útvendigari verju úr syntetiskum gummi, við sergjörðum polyethylene lagi. Hetta er sergjört til at tola sjógv og sól. Hesar slangur verða veittar við One-Piece fittings.

Hydraulic hose 797ST (Super Tough). These four-layered hydraulic hoses are produced with an outside cover made from synthetic rubber, with a special layer polyethylene. This is made to tolerate seawater and sun-light. These hoses are delivered with One-Piece fittings.



STØDD DIMENSION	ARBEIÐSTRÝST WORKING PRESSURE
inch	bar/psi
1/4"	425bar / 6160psi
3/8"	350bar / 5075psi
1/2"	310bar / 4495psi
3/4"	280bar / 4060psi
1"	210bar / 3045psi
1 1/4"	172bar / 2495psi
Umslag á slangu Hose cover type	Super Tough
Spesifikatióinir Specifications	ISO 18752
Útgáva av fittings Fittings series	77 Series
Slangustyrking Hose reinforcement	Fýra lög av veiri 4 spirals of steel wire
Umslag (tilfar) Cover material	Syntetískt gummi / Synthetic rubber abrasion resistant
Tilfar á innaru síðu Hose inner tube material	Syntetískt gummi / Proprietary synthetic rubber compound
Max arbeiðshiti Maximum operating temperature	125 °C

PARKER PTS (TRACKING SYSTEM)

PARKER PTS (TRACKING SYSTEM)

Parker PTS - PTS stendur fyri "Parker Tracking System". Sum teir einastu í Føroyum hevur KJ tracking system til allar hydraulikkslangur sum verða veittar. Allar hydraulikkslangur verða veittar við einum spjaldri, sum verður klistrað á slanguna. Við hesum kann kundin evt. skannað ella senda strikukoduna til KJ og kundin fær júst somu slangu aftur. Á hendan hátt sleppur kundi undan at avmonterað hana og takað hann inn til KJ. PTS kann eisini nýtast sum alarm, t.d um ein slanga skal skiftast aftaná 1/2 ár, kann kundin seta alarm á appini sum so sigur frá. Á spjaldrið kann KJ skriva hvat kundin ynskir, eitt nú KJ-nummar og staðseting av slanguni o.s.fr. Hetta er ein tænasta, sum KJ bjóðar sínum kundum.

Parker PTS - PTS stands for "Parker Tracking System". KJ is the only supplier in the Faroe Islands that has a tracking system for all delivered hydraulic hoses. All hydraulic hoses are supplied with a label. With this the customer can scan and/or send the bar code to KJ and get exactly the same hose back for a second order. In doing this, the customer does not have to dismount the hose and bring it back to KJ in order to get the exact same hose. PTS can also make an alarm when it is time to change the hose after half a year. This is done by using an app which signals when it is time to change it with a new hose. KJ can write whatever the customer wishes on the label - for example this can be the KJ-number of the hose, area of use etc. This service is offered to KJ's valued customers.





SHIELDMASTER

SHIELDMASTER

Shieldmaster 4000 - Tann vælkenda hydraulikkslangan til fiskapumpuna. Hesa slangu hefur KJ veitt í kilometurvís til pelagisku skipini gjøgnum árin. Sera slitsterk slanga, við PVC gummi útvendiga, sum ger at hon glíður væl eftir dekinum og lúnningini.

Shieldmaster 4000 - the famous hydraulic hose for the fish pump. KJ has delivered many kilometers of lengths of this hose for the pelagic vessels throughout the years. Exceptionally strong hose with PVC rubber on the outside, which makes it easy to work with.



STØDD DIMENSION	ARBEIÐSTRÝST WORKING PRESSURE
inch	bar/psi
1 1/4"	276bar / 4000psi
1 1/2"	276bar / 4000psi
2"	276bar / 4000psi
Umslag á slangu Hose cover type	Komposit lag við framúr mótstøðuføri mótvegis skursli / Composite bi-layer structure with outstanding abrasion resistance
Slangustyrking Reinforcement	Fýra styrktir veirar / Four high tensile steel spirals
Max arbeiðshiti Maximum operating temperature	125 °C
Góðkenning Type approvals	CU-TR
Tilfar á innaru síðu Hose inner tube material	Syntetiskt gummi, tolur olju / Oil resistant synthetic rubber
Lyklaeginleikar Key features	• ISO trýstsmát / Isobaric pressure rating • Tolur kaldastu umstøðurnar / FROST suitable for very cold environments • Framúr mótstøðuføri ímóti skursli og oson / Outstanding abrasion and ozone resistance



RØR- OG SLANGUFITTINGS, HYDRAULIKKUR

PIPE AND HOSE FITTINGS, HYDRAULICS

ERMETO RØRFITTINGS

ERMETO FITTINGS

Okkara ermeto fittings vísa til DIN2352/DIN EN ISO 8434-1. Ermeto fittings fáast í karbonstáli og rustfríum stáli. L-serian er á goymslu úr 6mm upp til 42mm. S-serian er á goymslu úr 6mm upp til 38mm.

Our ermeto type (profile ring) fittings comply with DIN 2353/DIN EN ISO 8434-1. Bite type (profile ring) fittings are available in carbon steel and stainless steel. The L-series is on stock from 6mm up to 42. The S-series is on stock from 6mm up to 38mm.



JIC RØRFITTINGS

JIC FITTINGS

Okkara JIC 37° fittings vísa til SAEJ 514 (ISO 8434-2). Eisini veita vit spesial JIC 37° fittings – bæði við, og uttan o-ring. KJ hefur úr 7/16" upp til 1 7/8" á goymslu.

All our JIC 37° flare fittings comply with SAEJ 514 (ISO 8434-2). In addition to basic JIC 37° flare fittings, We also delivers special JIC 37° flare fittings – either with or without an O-ring. KJ has from 7/16" up to 1 7/8" on stock.



BSP RØRFITTINGS

BSP FITTINGS

Okkara BSP fittings við 60° konus kunnu fáast í karbon stáli og rustfríum stáli. KJ hefur frá 1/4" upp til 2" á goymslu.

Our BSP fittings with 60° cone are available in carbon steel or stainless steel. KJ has from 1/4" up to 2" on stock.



ORFS RØRFITTINGS

ORFS FITTINGS

Okkara ORFS fittings veita lekafría íbinding, eisini við hátrýsti, vibratiónum og skjóttgangandi umhvørvi. KJ hevur frá 9/16" upp til 1 11/16" á goymslu.

O-Ring Face Seal fitting design provides leak-free connections in applications with high-pressure, vibration and impulse environments. KJ has from 9/16" up to 1 11/16" on stock.



SLANGUFITTINGS

HOSE FITTINGS

Vit bjóða eitt sera stórt úrval av One-Piece-slangufittings, frammleidd í Evropa. Øll eru sniðgivin til at fylgja skipanum við IFS slangum, soleiðis at góðska og avrik er í háseti. Vit hava stórt úrval á goymslu av ermeto, BSP, JIC, ORFS og SAE, í bæði stáli og rustfríum stáli.

We offer a wide range of One-Piece fittings manufactured in Europe, all designed as a match system with IFS hoses, assuring quality and performance.



SVØVIL

SWIVEL JOINTS

SJ 10 útgávan av svøvlum (beinir). Eru framleiddir við tí fyri eyga, at verða settur millum slangufittings, soleiðis at slangan verður betri vard. Snúningsliðurin er gjørdur av einum ella tveimum røðum av radialum kúlum (ein røð upp til 1/2" íroknað). Pakningurin er úr nitrilgummi.

The series SJ 10 (straight) swivel joints are designed to be mounted between a hose assembly and a rigid component in order to allow and compensate occasional rotations, preventing hose damages. The swivel joint rotation is based on one or two rows of radial balls (one row up to size 1/2" included). Standard seals in nitril rubber.



VØRUNUMMAR ARTICLE NUMBER	ARBEIDSTRÝST MAX PRESSURE IN ROTATION		MAX TRÝST STATIC MAX PRESSURE	
#	bar	psi	bar	psi
1004S	200	2900	400	5800
1006S	200	2900	400	5800
1008S	150	2175	300	4350
1012S	150	2175	300	4350
1016S	100	1450	300	4350
1020S	100	1450	300	4350
1024S	80	1160	300	4350
1032S	50	725	250	3625

SVØVIL 90°

SWIVEL JOINTS 90°

SJ 90 útgávan av svøvlum (vinkul). Eru framleiddir við tí fyri eyga, at verða settir millum slangufittings, soleiðis at slangan verður betri vard. Snúningsliðurin er gjørdur av einum ella tveimum røðum av radialum kúlum (ein røð upp til 1/2" íroknað). Pakningurin er úr nitrilgummi.

The series SJ 90 (angle) swivel joints are designed to be mounted between a hose assembly and a rigid component in order to allow and compensate occasional rotations, preventing hose damages. The swivel joint rotation is based on one or two rows of radial balls (one row up to size 1/2" included). Standard seals in nitril rubber.



VØRUNUMMAR ARTICLE NUMBER	ARBEIDSTRÝST MAX PRESSURE IN ROTATION		MAX TRÝST STATIC MAX PRESSURE	
#	bar	psi	bar	psi
9004SJ	200	2900	400	5800
9006SJ	200	2900	400	5800
9008SJ	150	2175	300	4350
9012SJ	150	2175	300	4350
9016SJ	100	1450	300	4350
9020SJ	100	1450	300	4350
9024SJ	80	1160	300	4350
9032SJ	50	725	250	3625

The background of the entire page is a photograph of various industrial filters and filter housings. The image is overlaid with a semi-transparent blue filter. In the foreground, there are several cylindrical filters: one with a perforated metal mesh, one with a pleated paper filter, and one with a pleated paper filter and a metal top. In the background, there are larger filter housings, one of which has the 'HIFI' logo and 'S 0 020' printed on it. The text 'FILTUR OG FILTURHÚSAR' is overlaid in large white letters, and 'FILTERS AND FILTER HOUSINGS' is overlaid in smaller white letters below it.

FILTUR OG FILTURHÚSAR

FILTERS AND FILTER HOUSINGS

SEPAR FILTURHÚSI SWK2000/40/U DUPLEX

SEPAR FILTERHOUSING SWK2000/40/U DUPLEX

Dupultur filterhúsi til brennivolju. Verður oft nýttur sum forfilter til motorar. Verður eisini veitt við klárum glasi og avtapping. Hesin klárar 2400 litrar um tíman. Til hesar filterhúsar, fáast fiturelement úr 10 micron upp til 60 micron. Max trúst er 4 bar. Hesir fáast eisini sum einkulthúsar (simplex).

Double filterhousing for fuel oil. Is often used a pre-filter for engines. Are supplied with a clear glass and draining option. These manage 2400 ltr/hr. For these filter housings are filter elements from 10 micron up to 60 micron available. Max pressure is 4 bar. These are also available in simplex.



SEPAR FILTURHÚSI SWK2000/18/U DUPLEX

SEPAR FILTERHOUSING SWK2000/18/U DUPLEX

Dupultur filterhúsi til brennivolju. Verður oft nýttur sum forfilter til motorar. Verður eisini veitt við klárum glasi og avtapping. Hesin klárar 1080 litrar um tíman. Til hesar filterhúsar, fáast fiturelement úr 10 micron upp til 60 micron. Max trúst er 7 bar. Hesir fáast eisini sum einkulthúsar (simplex).

Double filterhousing for fuel oil. Is often used a pre-filter for engines. Are supplied with a clear glass and draining option. These manage 1080 ltr/hr. For these filter housings are filter elements from 10 micron up to 60 micron available. Max pressure is 7 bar. These are also available in simplex.



RACOR FILTURHÚSAR

RACOR FILTERHOUSING

Racor Fuel Filter Water Separator Turbine serian er eitt trýdeild filturskipan, sum gevur maksimála verju av lutum í diesel-motorum. Tað beinur burtur skaðilig evni frá brennievni, so sum vatn, silikon, sand, skitt og rust. Hesir filterhúsar fáast við elementum við 2 micron, 10 micron og 30 micron. KJ veitur Racor filterhúsar í bæði einkultum og dupultum húsum.

The Racor Fuel Filter Water Separator Turbine Series is a three-stage filtration system that provides maximum protection of diesel engine components by effectively removing contaminants from fuel, such as water, silica, sand, dirt, and rust. These Racor filter housings are available in 2 micron, 10 micron and 30 micron. KJ can supply these in both single and double housings.



VATNFILTURHÚSAR

FILTER HOUSINGS (WATER)

Styrktir polypropylen húsar hava sterkt kemiskt mótstøðuføri. Verða millum annað brúktir til reinsing av vatn/veskum umborð á skipum. Fáast í 10" og 20" støddum við klárum, umframt kánum sniði. KJ hevur stórt úrval av fiturelementum til hesar vatnfilterhúsar.

Reinforced polypropylene housings have excellent chemical resistance. Are used for fresh water production onboard vessels. Available in 10" and 20" sizes with clear and opaque sump options. KJ has a wide range of filter elements for these filter housings.



FILTURHÚSAR

FILTER HOUSINGS

KJ hevur filterhúsar á goymslu, til smyrji- og brenniolju, umframt hydraulikk. Teir fáast rømonteraðir og tanga-monteraðir.

KJ keeps filter housings for lube- and fuel oil, as well as hydraulics on stock. Can be mounted on pipes as well as on tanks.





FILTUR

FILTERS

KJ hevur størsta úrval av filtrum í Føroyum, har omanfyri 1100 ymisk filter eru á goymslu. Umframt hetta, umboðar KJ nakrar av størstu filterframleiðarunum í heiminum. Hesir eru millum annað Donaldson, HIFI og Parker.

KJ has the biggest range of filters on stock in the country, where more than 1100 different filters are on stock. KJ also represents some of the world's largest producers of filters. These are for example Donaldson, HIFI and Parker.



BOLL & KIRCH FILTUR

BOLL & KIRCH FILTER

KJ bjóðar filtur og deilir frá Boll & Kirch. Filtrini eru dygdargóð og væl umtókt, og verða einamest nýtt innan fiskivinnuna. Vit veita filturstavar úr polyester og stáli.

KJ offers filters and spare parts from Boll & Kirch. The filters are high-end quality and much sought after. They mostly used within the fishing industry. We offer filter rods in polyester and steel.




FILTURMÁTTA PST290

FILTER MATS

Filturmáttir til turbinur og annað. Fínleiki G3 og G4, breidd upp til 2 mtr og longd upp til 20 mtr. Tjúktin fæst í 10 mm og 20 mm.

Filter mats for tubines etc. Fineness G3 and G4, width up to 2 mtr and length up to 20 mtr. Thickness is available in 10 mm and 20mm.



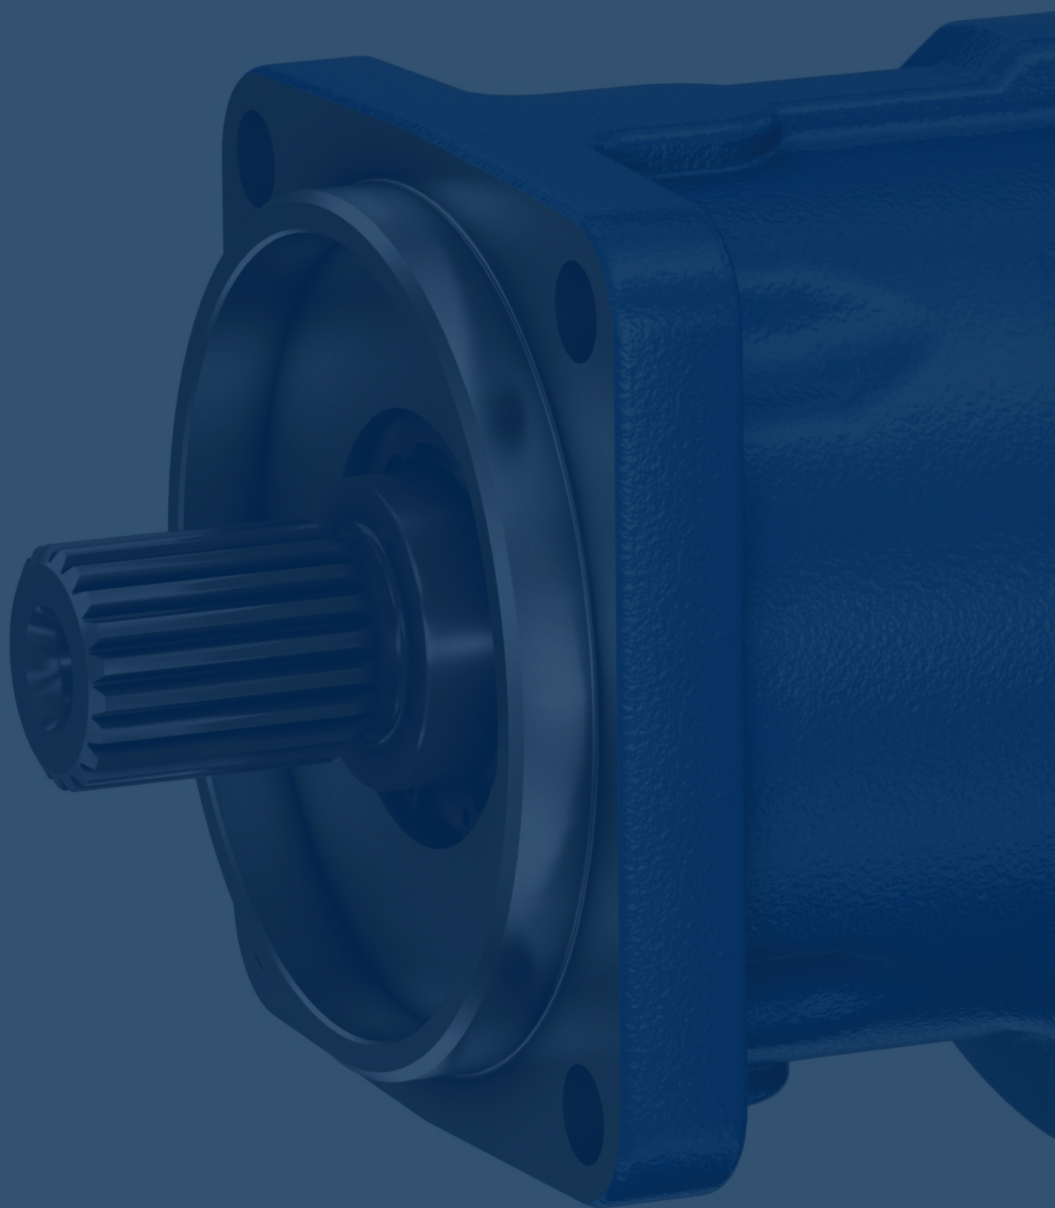

A large, dark blue hydraulic pump and motor assembly is shown in the background, partially obscured by the text. The pump is on the left, and the motor is on the right, both with a textured, cast-metal appearance. The motor has a prominent circular port on its side.

HYDRAULISKAR PUMPUR OG MOTORAR

HYDRAULIC PUMPS AND MOTORS



HYDRAULISKAR PUMPUR OG MOTORAR

HYDRAULIC PUMPS AND MOTORS

DANFOSS ORBIT MOTORAR

DANFOSS ORBIT MOTORS

KJ hefur stórt úrval av Danfoss Orbit hydraulikkmotorum á goymslu, t.d. OMR, OMM, OMT o.s.fr.

KJ has a wide range of Orbit hydraulic engines from Danfoss on stock. For example OMR, OMM, OMT etc.



PARKER/DENISON PUMPUR

PARKER/DENISON PUMPS

KJ hefur flestallar Parker innmatar á goymslu. Eisini hefur KJ akslar, pakningssett og búsningsar til Parker/Denison pumpur.

KJ keeps most of Parker cart.kits on stock. Besides, KJ also has shafts, sealkits and bushings for Parker/Denison pumps.



TANNHJÓLSPUMPUR

GEAR PUMPS

KJ hefur flest allar tannhjólspumpur í bólki tvey og trý á goymslu. KJ hefur í bólki tvey, úr 4cc upp til 40cc og í bólki trý, úr 27cc upp til 90cc á goymslu.

KJ has most gear pumps in group two and three in stock. KJ keeps group 2 from 4cc up to 40cc and in group 3 from 27cc up to 90cc in stock.





REXROTH PUMPUR

REXROTH PUMPS

KJ umboðar Rexroth og bjóðar stórt úrval av pumpum, ventilum, spolum o.tl.

KJ represents Rexroth and we offer a wide range of pumps, valves, coils etc.

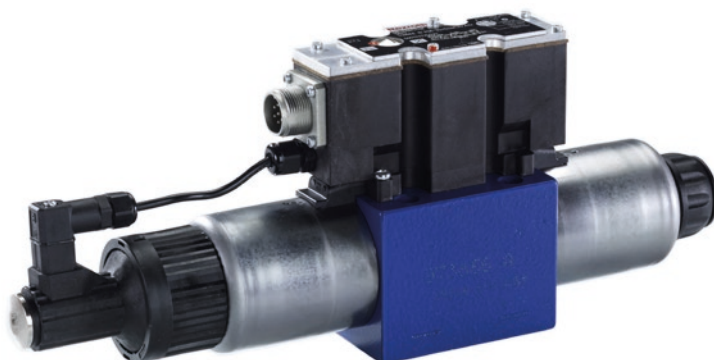





VATNPUMPUR

WATER PUMPS




PEDROLLO PUMPUR

PEDROLLO PUMPS

KJ hefur stórt úrval av Pedrollo pumpum á goymslu. KJ kann bjóða Pedrello pumpur við impellara úr bæði rustfríum og úr alu.bronsu.

KJ has a wide range of Pedrollo general purpose pumps on stock. KJ can offer Pedrollo pumps with impellers in stainless steel and alu.bronze.

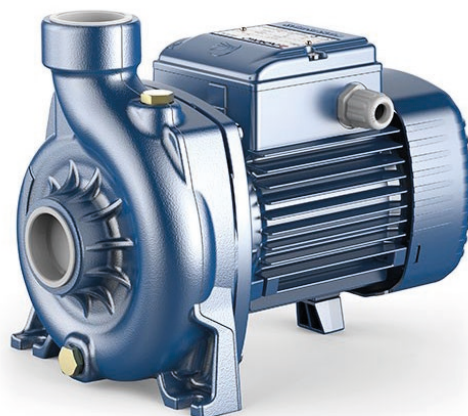

GRUNDFOS PUMPUR

GRUNDFOS PUMPS

KJ bjóðar stórt úrval av pumpum og eykalutum frá Grundfos. Vit kunnu eisini bjóða heildarloysnir til eitt nú smoltstøðir, skip o.a. KJ hevur tekniska og sterka vitan innan økið.

KJ offer a wide range of pumps and spare parts from Grundfos . We can also offer complete and comprehensive solutions for smolt hatcheries, maritime vessels etc. KJ has a strong and technical knowledge in this area.








SAMSON VAKUUMPUMPUR

SAMSON PUMPS

KJ umboðar Samson Pumps í Føroyum. KJ hevur Samson pumpur og eykalutir á goymslu.

KJ represents Samson Pumps in Faroe Islands. KJ can offer Samson pumps and spare parts, as they are an integral part of the stock.

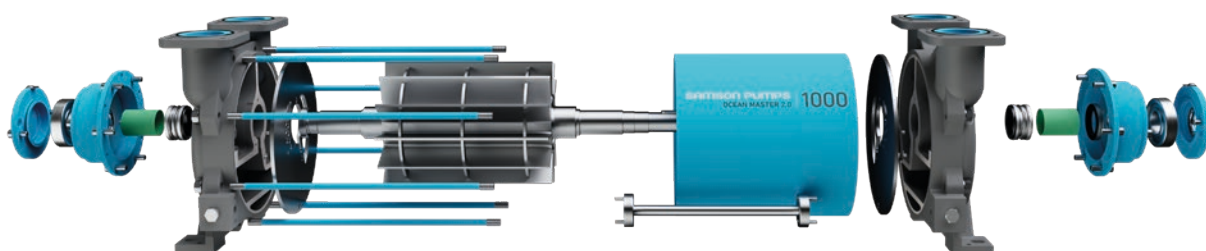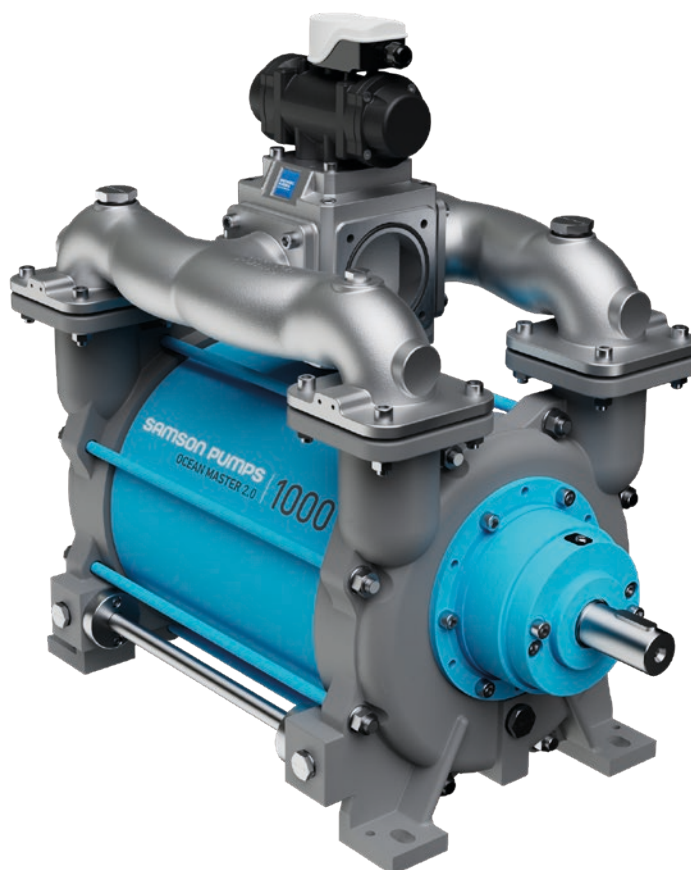

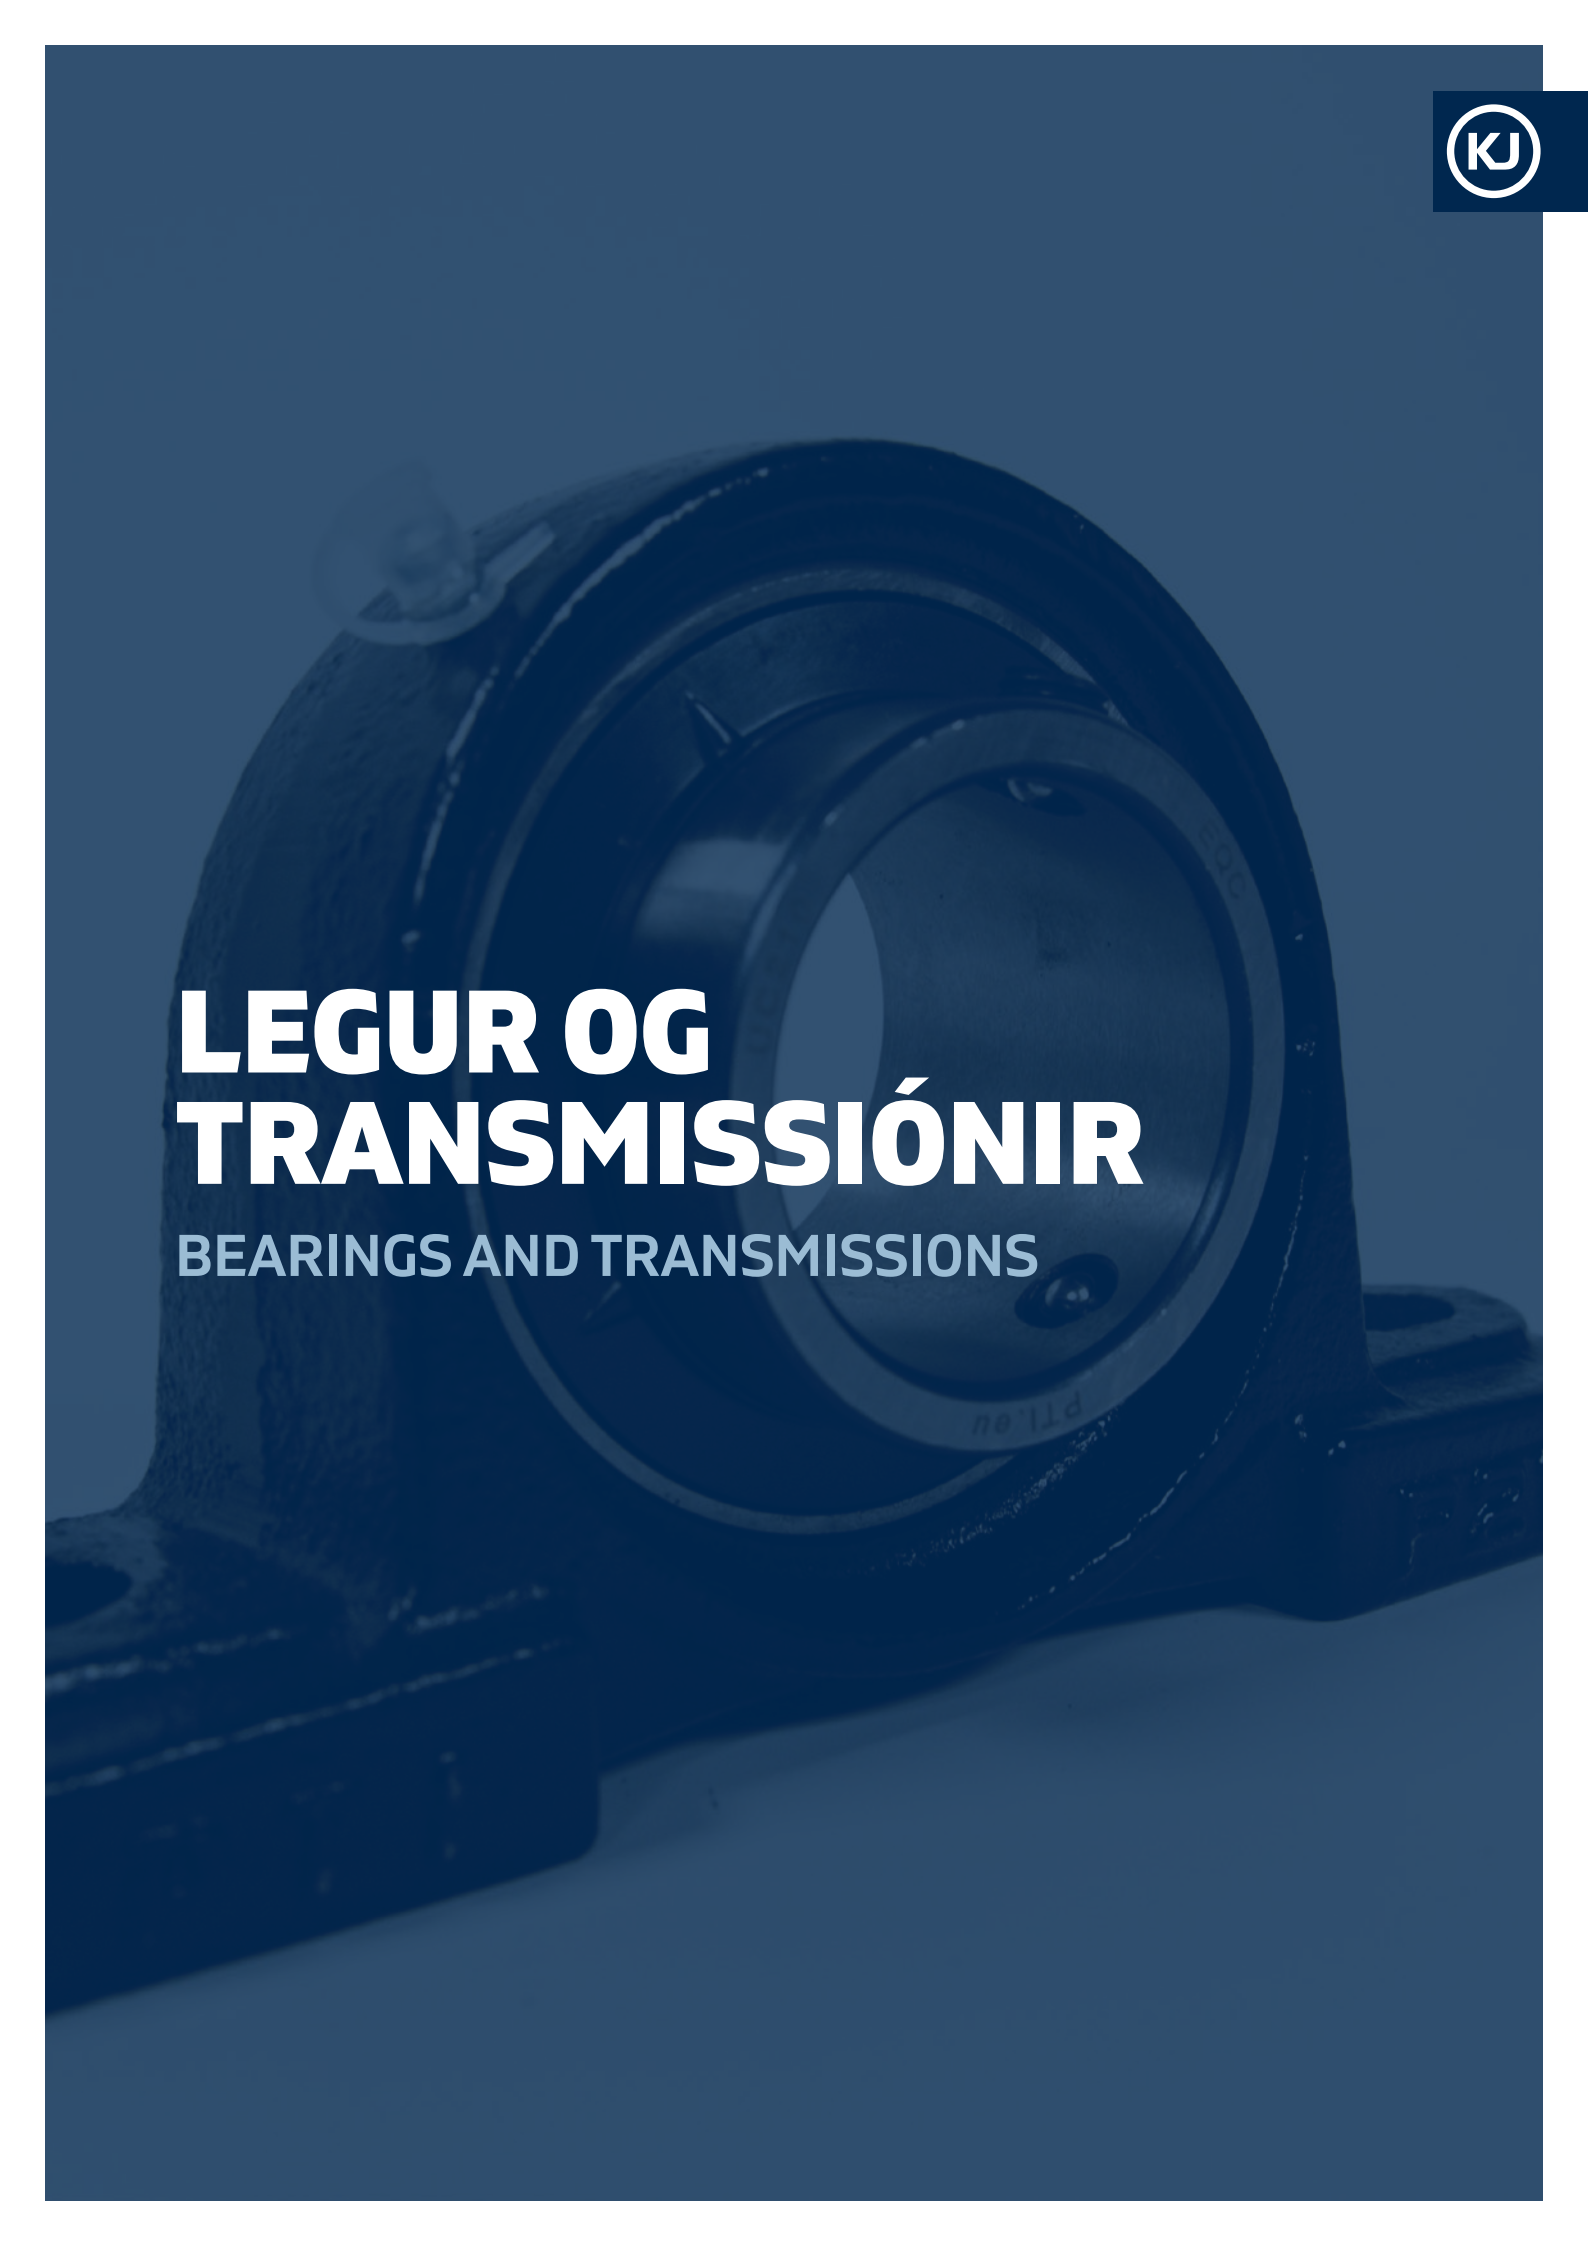The background of the entire page is a dark blue-tinted photograph of a mechanical bearing assembly. The assembly is shown from a side-on perspective, highlighting the outer ring and the inner shaft. The text is overlaid on the left side of the image.

LEGUR OG TRANSMISSIÓNIR

BEARINGS AND TRANSMISSIONS

LEGUR OG TRANSMISSIÓNIR

BEARINGS AND TRANSMISSIONS

KJ hefur stórt úrval av legum og transmissiónum á goymslu. Umframt hetta, hefur KJ stórt úrval av kíla-reimum, koblingum, tannhjól og ketum v.m.

Úr stóra úrvalinum kann nevast kúlulegur, vinkulkontaktlegur, sferiskar rullulegur, koniskar rullulegur og sylindriskar rullulegur. Umframt legur, eru eisini legu-húsar í plasti, stáli og rustfríum á goymslu.

Á goymsluni er eisini stórt úrval av koblingum. Til dæmis Rexnord, softex v.m.

KJ hefur umframt hetta, eisini stórt úrval av ketum. Simplex, duplex og triplex. Hesar eru eisini á goymslu í rustfríum.

KJ keeps a wide range of bearings and transmissions on stock. Furthermore, KJ also has a wide range of V-belts, gears and chains etc.

Out of the vast array of spare parts are for example roller bearings, angular contact bearings, spherical bearings, conical bearings and cylindrical roller bearings. KJ also keeps bearing housings in plastics, steel and stainless steel on stock.

The warehouse contains a large range of couplings. Rexnord and softex to mention a few.

KJ has a wide range of chains on stock. Simplex, duplex and triplex. These are also available in stainless.



The background of the entire page is a photograph of industrial valves, overlaid with a semi-transparent dark blue filter. Three valves are visible: one in the foreground on the left, one in the center, and one in the background on the right. They are metallic and have flanged ends with bolt holes.

INDUSTRI- VENTILAR

INDUSTRY VALVES

BUTTERFLYVENTILAR

BUTTERFLY VALVES

KJ býðar eitt breitt úrval av butterfly ventílum, alt eftir hvat kundin ynskir. KJ hevur ventilar á goymslu frá DN40 og heilt up til DN400. KJ hevur bæði LUG og Wafer ventilar á goymslu, við NBR ella EPDM pakningi á goymslu. Hesir ventilar fáast við rustfríum og alu. bronsu spjældrum.

KJ offers a wide selection of butterfly valves. We always keep valves on stock, from DN40 up to DN400 - KJ has both LUG and Wafer, as well as valves with NBR and EPDM seals. These valves are available with stainless and alu.bronze gates.



CYL SPAKAVENTILAR

CYL KNIFE VALVES

KJ hefur Cyl spakaventilar úr DN100 til DN450 á goymslu. Allir eru við luftsýlindara. Til hesar hefur KJ eisini repara-tíónskitt, pakningar o.a. á goymslu.

KJ keeps Cyl knife valves from DN100 up to DN450 on stock. All are supplied with pneumatic cylinders. For these KJ also offers repkits, gaskets, etc. on stock.



ELAFLEX


KOMPENSATORAR

ELAFLEX COMPENSATORS

Kompensatorar verða brúktir sum liðiligar samlingar millum rörskipanir. Bygnaðurin og longdin (installatíóns-støddin) er viðurkend sum altjóða verandi standard.

Rubber Expansion Joints (compensators) are used as flexible connectors within pipe systems. Their construction and lengths (installation sizes) have since become internationally recognised standard



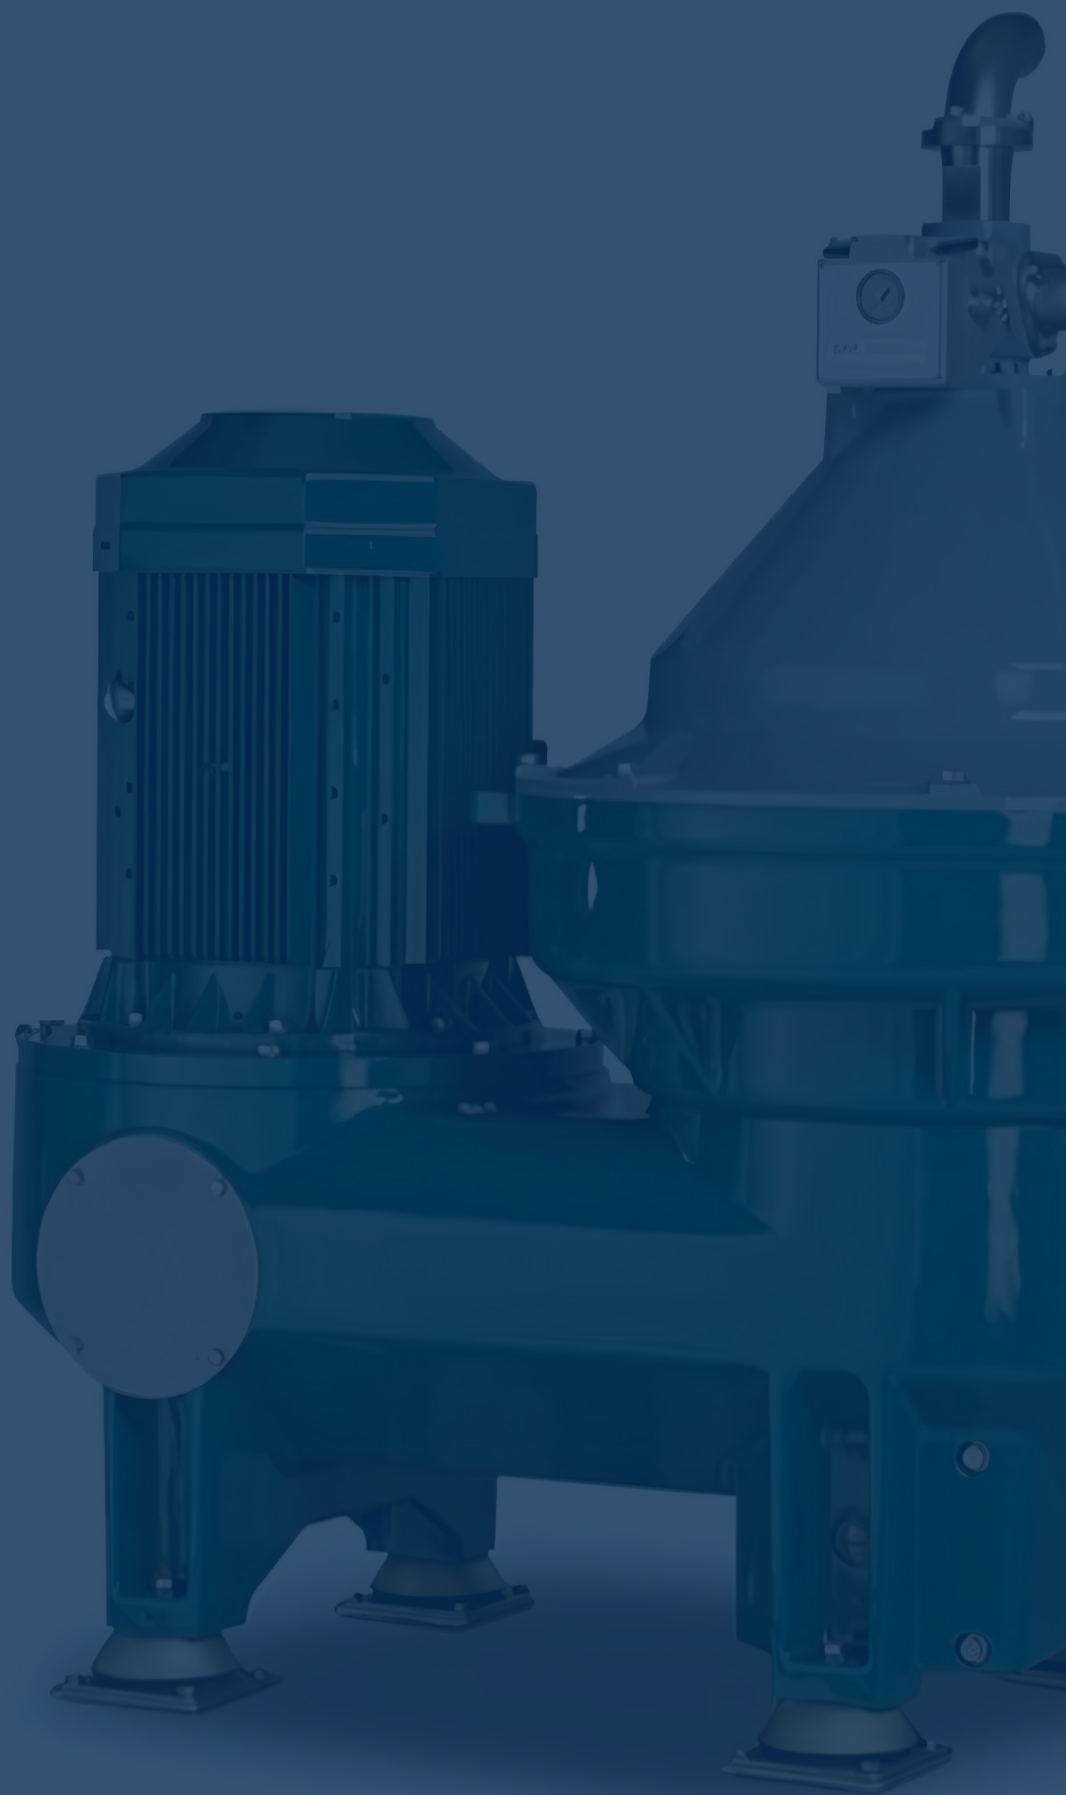

A faint, semi-transparent image of industrial machinery is visible on the left side of the page. It appears to be a large, dark-colored machine with various pipes, valves, and a cylindrical component at the bottom. The image is partially obscured by the text and the dark blue background.

SEPERATORAR

SEPERATORS

ALFA LAVAL

ALFA LAVAL

KJ hefur eitt breitt úrval av eykalutum til Alfa Laval. Eykalutir bæði til varmavekslara og seperatorar. Til dæmis service kit (intermediate og major), pakningar, reimar o.a.

KJ has a wide range of Alfa Laval spare parts on stock. Spare parts for such as seperators and heat exchangers, for example service kits (intermediate and major), seals, belts etc.



GEA WESTFALIA

GEA WESTFALIA

KJ hefur eitt breitt úrval av eykalutum til GEA Westfalia seperatorar - pakningar, service kit o.a

KJ has a wide range of GEA Westfalia spare parts, for exaple for seperators - seals, service kits and more.





LUFT

PNEUMATICS

LUFTSLANGUR PA

AIRHOSE PA

Væl egnaðar til vinnuliga nýtslu. PA slangur tryggja góða slitstyrk. Sergjört, stívt polyamid tilfar, ið er framleitt sambært eco-design leisti.

Tried-and-tested for industrial applications, PA tubing guarantees excellent durability due to its stable long-term mechanical properties. Special grade of semi-rigid polyamide manufactured according to our Eco-Design approach.



LUFTFITTINGS

PNEUMATIC FITTINGS

KJ hefur stórt úrval av Parker push-in luftfittings á goymslu. Hesi kunnu veitast bæði í plasti og í stáli, úr 3mm til 16mm.

KJ has a wide range of Parker push-in pneumatic fittings on stock. In both plastic and steel, going from 3mm up to 16mm.



PARKER LUFTSYLINDARAR OG VENTILAR

PARKER PNEUMATIC CYLINDERS AND VALVES

KJ hefur luftsyndindarar og luftventilar frá Parker á goymslu. KJ kann veita samlaða eind av stýriskipan til luft og luftsmyrjing.

KJ keeps pneumatic cylinders and valves from Parker on stock. KJ can supply customers with a complete set of pneumatic system as well as pneumatic lubrication.







KEMIKALIIR

CHEMICALS



TANK CLEAN ALKALINE 25L

TANK CLEAN ALKALINE 25L

TANKCLEAN ALKALINE er eitt ikki-etsandi, heavy-duty alkalískt reins, ið reinsar oljur, í tangum, ið bera serstaka coating. Tað er sergjørt til at betra um reinsigóðsku, samstundis sum tað fyrirbyrgir etsandi álopum. TANKCLEAN ALKALINE kann eisini nýtast sum luktdoyvandi reins, í flestøllum støðum. Hetta er sera góð sápa til vasking av skipsdekkum og tangum.

TANKCLEAN ALKALINE is a non-caustic heavy-duty alkaline cleaner formulated for cleaning oils from tanks with special coatings. It is specially designed to improve cleaning efficiency while overcoming the limitations imposed by caustic based cleaning compounds. TANKCLEAN ALKALINE can also be used as a deodorizing wash in all applications. This soap is suitable for cleaning decks onboard vessels and tanks.



TANK CLEAN ALKALINE EXTRA 25L

TANK CLEAN ALKALINE EXTRA 25L

TANKCLEAN ALKALINE EXTRA verður nýtt til at beina burtur oljur og restir í tangum. Tað kann eisini nýtast sum endalig viðgerð til reinsing av tangum. Kann harumframt nýtast til rustfritt stál og epoxylagaðar tangar. Verður hartil nýtt til ketlar og sum luktdoyvandi reins. Hetta er sera góð sápa til vasking av skipsdekkum og tangum.

TANKCLEAN ALKALINE EXTRA is used for removal of edible and animal oil residues in cargo tanks. It is also used as a final treatment for cleaning tanks. TANKCLEAN ALKALINE EXTRA is suitable for use on stainless steel and epoxy coated tank materials. TANKCLEAN ALKALINE EXTRA is used for cleaning boiler furnace and as a neutralising agent. This soap is suitable for cleaning decks onboard vessels and tanks.



VALVE TREAT 25L

VALVE TREAT 25L

Við at koyra VALVE TREAT í bunkriolju, verður vanadium og sodium deaktiverað. Smeltipunktið á vanadium pentoxide er 675 °C og á sodium sulfat er það 880 °C. Táið VALVE TREAT verður nýtt, verða evnini við vanadium og sodium sulfat, við evnunum í VALVE TREAT, smeltbar á umleið 1100 °C.

Adding VALVE TREAT to bunker fuel forms a complex compound, that deactivates the vanadium and sodium common in heavy bunker fuels. The melting point of vanadium pentoxide is 675°C and that of sodium sulphate is 880°C. When VALVE TREAT is employed, the complexes formed with vanadium and sodium sulphate by the agents in VALVE TREAT melt at about 1100°C.



FOT SLUDGE DISPERSANT 25L

FOT SLUDGE DISPERSANT 25L

FOT SLUDGE DISPERSANT verður nýtt umborð á dampskipum og skipum annars, ið brenna leivdir av brennievnum. Hendan nýggja loysnin spjaðir evju, brútur vatn í oljumylking, ið ger leivdirnar meir homogenar. Hetta hevur við sær, at brenningin gerst betur. Henda vøran betrar um sentrifugala loysing, sirmger og innspræning. FOT SLUDGE DISPERSANT er ein nýggj viðgerð til brenniolju, ið á betri hátt spjaðir evjuna, so motorurin verður hildin reinur og so viðlíkahaldsfríur sum tilber.

FOT SLUDGE DISPERSANT is used in both steam and motor vessels burning residual fuel oils. This new innovated treatment disperses sludge, breaks water in oil emulsions, making the residual fuel more homogeneous for combustion improvement. This product also improves centrifugal separation, atomisation and injector spray pattern. FOT SLUDGE DISPERSANT is a new generation fuel oil treatment, with a unique ability to disperse the sludge, keeping the pre-combustion system clean and maintenance free.





SEPERATOR DISC CLEANER 25L

SEPERATOR DISC CLEANER 25L

SEPARATOR DISC CLEANER er ein serstök blanding av surfaktantum, upploysingarevnum og sýrum, ið øll beina burtur carbonrestir o.a. frá smyrjoliðu og brenniliðuseperatorum.

SEPARATOR DISC CLEANER is an especially formulated blend of surfactants, solvents and acids designed to remove carbonaceous and varnish deposits from lube oil and fuel oil separator discs.



BOILER TREAT COMBI 25L

BOILER TREAT COMBI 25L

BOILER TREAT COMBI er ein flótandi blanding av molekylurum vekt-lutum, nevtraliseraði organiskum sýrum og etsingum, reinsi og evju viðgerðarevnum. Er gjørt til at økja um pH-virði á ketilsvatni (10.5 - 11.0), ið forðar etsing mest møguligt, við trústi úr 7 til 35 bar.

BOILER TREAT COMBI is a liquid combination of low molecular weight components, neutralised organic acids and corrosion, scale and sludge conditioners. The specialised blended low molecular weight compounds are designed to elevate boiler water pH to levels, which reduce corrosion to the minimum possible in boilers (pH 10.5 - 11.0) with pressure of 7 to 35 bar.



RUST REMOVER

RUST REMOVER

RUST REMOVER er sera væl hóskandi til at beina burtur súrevni, klor, nitrat, amid, aminosýrur og onnur salt, nevtralir og alkaliska dálking, so sum kalsiumklorid, kalsiumnitrat o.t.l. Eisini hóskar hetta sera væl til at reinsa restir eftir sjóvask. Reinsar og klárar aluminium, messing og kopar. Ger flatuna klára, so tað er klárt at verða málað.

RUST REMOVER is suitable to remove oxides, chlorides, nitrates, amides, amines and other salts, neutral and alkaline contaminations like calcium chloride, calcium nitrate etc. Also very suitable to remove lime deposits after hot seawater washes. Cleans and brightens aluminium, brass and copper, renders the surface ready and suitable for painting



KEMI CHEMISTRY



BREMSUREINS

BRAKE CLEANER

WEICON Brake Cleaner er eitt universalreins til verkstaðsídnaðin. Reinsar, avfeittar og avdampar, uttan at lata skitt eftir sær.

WEICON Brake Cleaner is a universal cleaner for the mechanical industry, which cleans, degreases and evaporates without leaving residues.



AT-44

AT-44

WEICON AT-44 er eitt silikonfrítt all-round spray við PTFE.

WEICON AT-44 is a silicone-free all-round spray with PTFE.



RUSTLOYSARI & KONTAKT SPRAY

RUST REMOVER AND CONTACT SPRAY

WEICON rustloysara og kontaktspray ger hetta idéelt til umvælingar og viðlíkahald.

The six-fold function of WEICON Rust Loosener and Contact Spray makes it indispensable for repairs, maintenance and service works.



ELEKTROREINS

ELEKTRO CLEANER

WEICON Electro Contact Cleaner er eitt spesialreins til skjóta reinsan og avfeiting av øllum slögum av dálkaðum og rustaðum kontaktum. Reinsið er serliga ætlað til reinsan av elektroniskum og mekaniskum lutum.

WEICON Electro Contact Cleaner is a special cleaner for the fast and effective cleaning and degreasing of all kinds of soiled or corroded contacts. It is specially developed for the cleaning of electronic and mechanical components.



VA-100 LÍM

VA-100 GLUE

Sekundlím til gummi og plastik við miðal tjúkkleiki og miðallangari herdingstíð. SEGA-sertifiserað.

Strong adhesive for rubber and plastic with medium viscosity. Slightly longer cure time. ISEGA-certified.



BLACK-SEAL

BLACK-SEAL

Black-Seal er ein svart fuga, ið er sera mótstøðufør móti høgum hitastigum (+280°C). Fugan er frí frá uppløysingarevnum, sterk, tolur olju, feitt, hátrúst og heldur sera leingi. Hon er sera elastisk (brotstyrkin er á umleið 500%)

Black-Seal is black, high-temperature-resistant (+280°C/+536°F), free of solvents, strong, oil-resistant, grease-resistant, pressure-resistant, resistant to ageing and extremely elastic (breaking elongation of approx. 500%).



FLEX 310 HVÍTT

FLEX 310 WHITE

WEICON Flex 310 M Classic Hvítt er ein sterk fuga, ið kann málást á. Heldur sær í skapi og útsjónd sera leingi og er mótstøðufør móti UV strálum. Toler fesk- og saltvatn og er uttan silikon, isocyanat, halogenir og upploysingarevnrir.

WEICON Flex 310 M Classic White is strong, paintable (wet-on-wet), sandable, has an outstanding resistance to ageing and good resistance to UV rays. It is resistant to fresh and salt water and is free of silicone, isocyanate, halogens and solvents.



FLEX 310 SUPER-TACK

FLEX 310 SUPER-TACK

WEICON Flex 310 M Super-Tack er serdeilis sterk fuga, ið kann málást á. Heldur sær í skapi og útsjónd sera leingi og er mótstøðufør móti UV strálum. Toler fesk- og saltvatn og er uttan silikon, isocyanat, halogenir og upploysingarevnrir. Baserað á MS polymer.

WEICON Flex 310 M Super-Tack is very strong, paintable "wet-on-wet", sandable, weather-resistant, resistant to UV rays and free of silicone, isocyanate, halogens and solvents, and non-corrosive. Flex 310 M Super-Tack is a strong, elastic adhesive based on MS polymer.



WEICONLOCK 305-42

WEICONLOCK 305-42

Tetningur til hydraulikk ið hevur DVGW góðkenning. Miðal tjúkkleiki, miðal styrki og verður avtíkin við vanligum amboðum

Hydraulic and with DVGW approval. Medium viscosity, medium strength and is disassembled with normal tools



WEICONLOCK 305-77

WEICONLOCK 305-77

Gevindtetningur við DVGW góðkenning. Høgur tjúkkleiki, miðal styrki og verður avtíkin við vanligum amboðum.

Threadsealing with and DVGW approval. High viscosity, medium strength and is disassembled with normal tools



WEICON BR

WEICON BR

Epoxy-baserað harpiks fylla, ið er gjørd til at fylla bláshol og til viðvíkahald av messing lutum. Kann nýtast í øllum maritima ídnaðinum og eisini í flestøllum øðrum vinnuligum greinum. Verður ofta nýtt til umvæling av bátaskrúvum.

The epoxy resin system WEICON BR is particularly suitable for filling blowholes and for repairing and reconditioning bronze parts and bronze castings. It can be used in the entire marine and shipping industry as well as in many other industrial sectors. Is often used when repairing boat screws.



OLJUMÁTTIR

OIL MATS

Máttir til olju. Stødd: 40 x 50 cm. Tilfar: Smeltað polypropylene. Uppísúgving fer fram í tí løtu at kontakt er við flatur. Fíprarnar eru í natúrligari hydrofobiskari støðu. Fíprarnar vísa vatn frá sær og flóta. Tað eru 100 máttir í hvørjum sekki.

Extra heavy oil only pads. Dimension: 40 x 50 cm - Composition: Melt-blown polypropylene. Starts absorbing on contact. Melt-blown polypropylene fibers are left in their natural hydrophobic state. These hydrophobic fibers repel water (and float) while only absorbing oils and other hydrocarbons. There are 100 mats in each bag.



KLÚTAR / VISKISTYKKIR

CLOTHS

Teir tiltiknu klútarnir (viskistykki), KJ kann eisini veita bummulls klútar og litaðar. Hesir klútarnir fáast í 10kg sekkjum.

The well known oil-wiping cloths. KJ can also supply cotton cloths and colored cloths. These cloths are supplied in 10kgs bags.



The background of the entire page is a dark blue, semi-transparent image of a metal tube and hose clamp. The clamp is rectangular with rounded corners and has a hexagonal nut on top. The text is overlaid on the left side of the clamp.

RØR- OG SLANGUKLEMMUR

TUBE AND HOSE CLAMPS



RØRBERARAR

TUBE CLAMPS

Rørberar við dekkplátum, sveisiplátum og boltum. KJ hefur eitt stórt og breitt úrval av rørberarum frá 6mm upp til 60mm. KJ veitur eisini dekk og sveisiplátur í rustfríum stáli.

Pipe carriers with deck plates, welding plates and bolts. KJ has a wide range of pipe carries on stock, going from 6mm up to 60mm. KJ supplies also deck and welding plates in stainless steel.



RUSTFRÍAR PARIKLEMMUR

POWER CLAMPS

Rustfríar pariklemmur. Sterkar slanguklemmur, sum kunnu nýtast til alskyns sløg av slangum. Rustfríar við tveimum umbrakoboltum. KJ hefur goymslu úr 32mm til 350mm í hesum. Rørklemman hefur rustfríðar umbrakoboltar.

Stainless pari power clamps. Strong hose clamps that can be used for multiple purposes. Stainless, with two bolts. KJ has stock from 32mm to 350mm in this particular clamp. Bolts are also stainless.



RUSTFRÍ SLANGUBOND

HOSE CLAMPS

Rustfrítt slangubond G5. Slangubond úr 8mm til 250mm við einum bolti

Stainless hose clamps. From 8mm to 250mm. Single bolt.




AXILOCK RØRKLEMMUR

AXILOCK IV NBR

Axilock rørklemmurnar eru gjørdar til at avloysa tørvin á flansum, sveising og øðrum. Loysnin skal vera skjót og lætt, soleiðis at eindirnar verða beindar saman. Við at seta klemmurnar saman í hvørjum enda, veitir Axilock trygd og góðsku á høðum støði. Hver klemma er 100% gummibundin, og tryggjar harvið rust-mótstøðuføri og verður hetta viðlíkahildið gjøgnum alla livitíðina á klemmuni.

The Teekay Axilock range is designed to replace the need for flanging, welding, pipe grooving and pipe threading by providing a quick and easy solution to joining plain-end pipe. Incorporating grip rings at each end of the fitting, the Teekay Axilock offers high levels of security by locking the pipes together under pressure. Each coupling is 100% rubber-lined, ensuring that high levels of corrosion resistance are maintained throughout the life of the coupling.

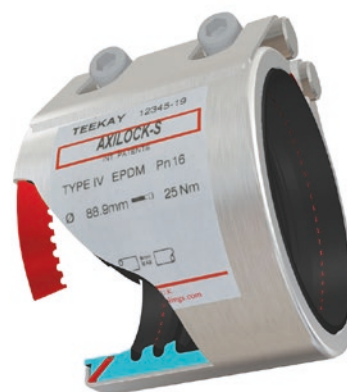

STØDD SIZE	TOLERANSA TOLERANCE	TRÝST PRESSURE	FÓRING CASING	BOLTAR BOLTS	PAKNINGUR SEAL
	mm	bar			
21,3mm Axilock-S type IV	21,0/21,6	16	AISI 316L	AISI 316	NBR & EPDM
26,8mm Axilock-S type IV	26,6/28,4	16	AISI 316L	AISI 316	NBR & EPDM
33,7mm Axilock-S type IV	33,3/34,1	16	AISI 316L	AISI 316	NBR & EPDM
38,0mm Axilock-S type IV	37,0/39,0	16	AISI 316L	AISI 316	NBR & EPDM
42,4mm Axilock-S type IV	41,4/43,4	16	AISI 316L	AISI 316	NBR & EPDM
48,3mm Axilock-S type IV	47,3/49,3	16	AISI 316L	AISI 316	NBR & EPDM
60,3mm Axilock-S type IV	59,0/62,0	16	AISI 316L	AISI 316	NBR & EPDM
76,1mm Axilock-S type IV	75,0/78,0	16	AISI 316L	AISI 316	NBR & EPDM
88,9mm Axilock-S type IV	88,0/91,0	16	AISI 316L	AISI 316	NBR & EPDM
114,3mm Axilock-S type IV	113,0/116,0	16	AISI 316L	AISI 316	NBR & EPDM
133,0mm Axilock-S type IV	132,0/135,0	16	AISI 316L	AISI 316	NBR & EPDM
139,7mm Axilock-S type IV	139,0/142,0	16	AISI 316L	AISI 316	NBR & EPDM
168,3mm Axilock-S type IV	167,0/170,0	16	AISI 316L	AISI 316	NBR & EPDM
219,1mm Axilock-S type IV	218,0/221,0	16	AISI 316L	AISI 316	NBR & EPDM

CAMLOCK KOBLINGAR

CAMLOCK COUPLINGS

KJ hefur eitt stórt úrval av Camlock koblingum á goymslu, bæði í aluminium og rustfríður. KJ veitur úr 1/2" upp til 10". Camlock koblingin er þúra slött innan tá hon verður kobláð saman, sum ger hessa kobling sera góða til fiskaflutning. Í koblinginni liggur ein EPDM pakningur. Hendan koblingin er sera slitsterk og tött.

KJ has a wide range of camlock couplings in aluminium and stainless steel on stock. KJ can offer these from sizes 1/2" up to 10". The camlock coupling has a great advantage in its smooth inside, which makes it ideal for fish transportation. In the coupling is a EPDM gasket. This coupling is exceptionally strong and closely sealed.

STÖÐD / GEVIND DIMENSION / THREAD	 LUTUR A PART A Hann við innv. gevind Male with internal thread	 LUTUR B PART B Hon við útv. gevind Female with external thread	 LUTUR C PART C Hon við slangustussi Female with hose nipple	 LUTUR D PART D Hon við innv. gevind Female with internal thread	 LUTUR E PART E Hann við slangustussi Male with hose nipple	 LUTUR DC PART DC Proppur til hann End cap for male	 LUTUR DP PART DP Proppur til hon End cap for female
inch	#	#	#	#	#	#	#
1/2" BSP	CAM70010	CAM70180	CAM72010	CAM73010	CAM74010	CAM76010	CAM77010
3/4" BSP	CAM70020	CAM70190	CAM72020	CAM73020	CAM74020	CAM76020	CAM77020
1" BSP	CAM70025	CAM70200	CAM72025	CAM73025	CAM74025	CAM76030	CAM77030
1 1/4" BSP	CAM70030	CAM70210	CAM72030	CAM73030	CAM74030	CAM76040	CAM77040
1 1/2" BSP	CAM70040	CAM70220	CAM72040	CAM73040	CAM74040	CAM76050	CAM77050
2" BSP	CAM70050	CAM70230	CAM72050	CAM73050	CAM74050	CAM76075	CAM77075
2 1/2" BSP	CAM70060	CAM70240	CAM72060	CAM73060	CAM74060	CAM7682	CAM77082
3" BSP	CAM70075	CAM70250	CAM72075	CAM73075	CAM74075	CAM76076	CAM77076
4" BSP	CAM70100	CAM70260	CAM72100	CAM73100	CAM74100	CAM76077	CAM77077
5" BSP	CAM70125	CAM70270	CAM72125	CAM73125	CAM74125	CAM76078	CAM77078
6" BSP	CAM70150	CAM70280	CAM72150	CAN73150	CAM74150	CAM76079	CAM77079
8" BSP	CAM70160	CAM70290	CAM72200	CAM73160	CAN74200	CAM76080	CAM77080
10" BSP	CAM70170	CAM70300	CAM72210	CAM73170	CAM74210	CAM76081	CAM77081





RØRFITTINGS

TUBE FITTINGS



RUSTFRÍTT, AMETAL OG GALVANISERAÐ GEVINDFITTINGS

STAINLESS THREADED FITTINGS

KJ hefur eitt stórt úrval av BSP rørfittings á goymslu í galvaniseraðum, rustfríum og ametal. KJ hefur úr 1/4" upp til 4" á goymslu.

KJ has a wide range of BSP fittings on stock in galvanized, stainless and ametal. KJ has from 1/4" up to 4" on stock.



SVEISFITTINGS

WELDING FITTINGS

Vit hava mest vanligu sveisfittingsini, so sum flansar, vinklar, tee og reduktiónir á goymslu úr 1" upp til 18". KJ kann veita sveisfittings í rustfríum, aluminium og vanligum stáli

KJ has the most common welding fittings, such as flanges, bends, tees and reductions, on stock. From 1" up to 18". KJ can supply welding fittings in stainless, aluminium and steel.





The background of the entire page is a photograph of several metal tubes. The tubes are arranged diagonally, with some in the foreground showing their circular ends. The image has a blue color overlay.

RØR

TUBES

HYDRAULIKKRØR

HYDRAULIC TUBE

KJ hefur eitt stórt úrval av elgalvaniseraðum hydraulikkörum, úr 4mm til 90mm.

KJ has a wide range of electroplated hydraulic fittings on stock



RUSTFRÍTT HYDRAULIKKRØR 316AISI

HYDRAULIC TUBE STAINLESS 316AISI

KJ hefur eisini eitt stórt úrval av rustfríum, súruføstum hydraulikkörum, úr 6mm til 60mm. Øll rörini eru AISI316.

KJ also has a wide range of stainless, acid resistant hydraulic tubes on stock, from 6mm up to 60mm. All tubes are AISI316.



GEVINDSTONG

THREAD ROD

KJ hefur eitt stórt úrval av gevindstongum, bæði í rustfríðum, elgalvaniseraðum og heittgalvaniseraðum góðsi. Av rustfríum gevindstongum hefur KJ goymslu úr 3mm upp í 30mm og í elgalvaniseraðum úr 6mm upp í 30mm. Í heittgalvaniseraðum hefur KJ úr 16mm upp í 27mm.

KJ has a wide range of threaded rods on stock, in stainless steel, electrogalvanized and hot-dip galvanized material. In stainless KJ keeps from 3mm up to 30mm, in electrogalvanized from 6mm up to 30mm and in hot-dip galvanized from 16mm up to 27mm on stock.



RUSTFRÍTT GEVINDRØR

STAINLESS STEEL TUBES FOR THREADING

KJ hevur eitt stórt úrval av rustfríum gevindørum á goymslu, úr 1/4" til 4".

KJ keeps a wide range of stainless threaded tubes on stock, from 1/4" up to 4".




PRIMAÐ STÁL

PRIMED STEEL

KJ hevur eitt stórt úrval av primaðum stáli á goymslu. Umframt rør, hevur KJ millum annað flatstál, vinkulstál, rørprofilar og annað primað stál á goymslu.

KJ has a wide range of primed steel on stock. Besides tubes, KJ has flat bars, angled bars, pipe profiles and other primed steel goods on stock.

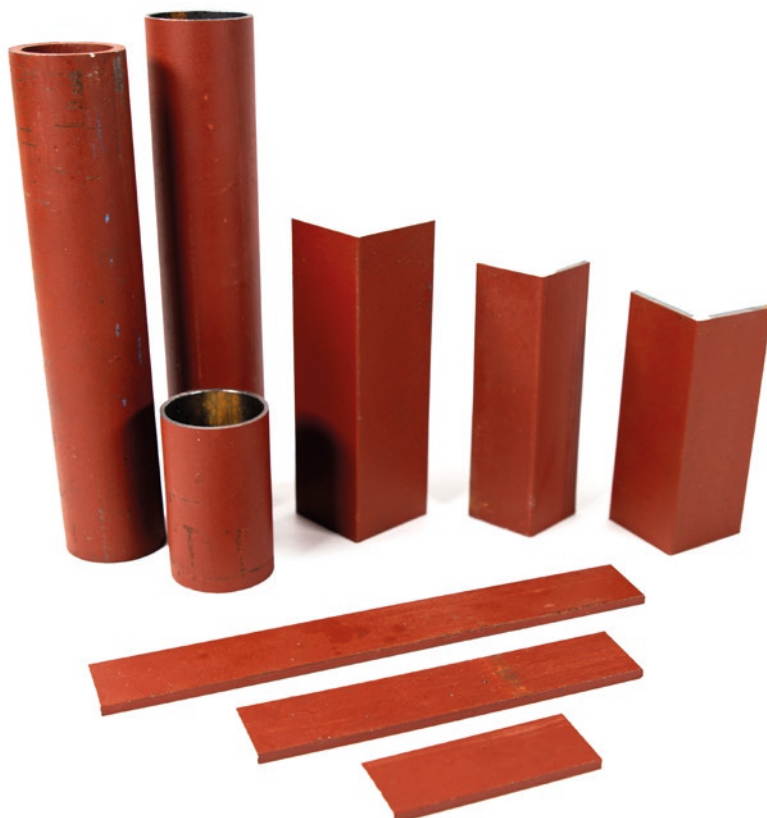

The background of the entire page is a dark blue gradient. Overlaid on this is a large, semi-transparent image of a red industrial valve. The valve has a circular body with four mounting holes around its perimeter. A handwheel is attached to the top, and a central stem with a nut is visible. The valve is slightly open, revealing a metallic, ribbed internal disc. The text is overlaid on the left side of the valve.

ALFABETISKT INNIHALDSYVIRLIT

TABLE OF CONTENTS IN ALPHABETICAL ORDER

ALFABETISKT INNIHALDSYVIRLIT

Alfa Laval	54	Parker/Denison pumpur	40
Aquaflex	18	Parker luftsylindrar og ventilar	57
Aspiroil	16	Parker PTS (Tracking System)	27
Aspir PU/H	15	Pedrollo pumpur	44
AT-44	64	Primað stál	79
Axilock rørklemmur	71	Racor filterhúsar	35
Black-Seal	65	Ragno Acqua	19
Boiler Treat Combi 25L	62	Rexroth pumpur	41
Boll & Kirch filter	37	Rørberarar	70
Bremsureins	64	Rustfríar pariklemmur	70
BSP rørfittings	30	Rustfrí slangubond	70
Butterflyventilar	50	Rustfrítt, Ametal og Galvaniserað gevindfittings	74
Camlock koblingar	72	Rustfrítt gevindrør	79
Cyl spakaventilar	51	Rustfrítt hydraulikkør 316AISI	78
Danfoss Orbit motorar	40	Rustloysari & kontakt spray	64
Elaflex kompensatorar	51	Rust remover	62
Elektroreins	65	Samson Vakuumpumpur	46
Ermeto rørfittings	30	Separ filterhúsi SWK2000/18/U Duplex	34
Filtur	36	Separ filterhúsi SWK2000/40/U Duplex	34
Filterhúsar	35	Seperator Disc Cleaner 25L	62
Filturmátta PST290	37	Shark slanga	13
Fiskapumpuslanga	22	Shieldmaster	28
Fiskaslangufittings	23	Slangubend	23
Flex 310 Hvítt	66	Slangufittings	31
Flex 310 Super-Tack	66	Slanguklemma	23
Flexfab kælivatnsslanga	15	Slangureduktión	23
Föðurslanga	18	Slangustussur	23
Fot Sludge Disperant 25L	61	Slanguvögga, rustfrí	24
GEA Westfalia	54	Snarkobling	23
Gevindstong	78	Superflex PU R	12
Grundfos pumpur	45	Superjet Hátrýsts Spulslanga	17
Hydraulikkør	78	Sveisifittings	75
Hydraulikklanga 462ST	26	Svøvil	24
Hydraulikklanga 797ST	26	Svøvil	32
Jamaica HD	14	Svøvil 90°	32
JIC rørfittings	30	Tank Clean Alkaline 25L	60
Klútar / Viskistykki	68	Tank Clean Alkaline Extra 25L	60
Legur og transmissiónir	48	Tannhjólspumpur	41
Luftfittings	56	VA-100 Lím	65
Luftslangur PA	56	Valve Treat 25L	61
Luisiana superelastics	10	Vatnfilterhúsar	35
Multi oil	16	Vatnslanga 1220	17
Oljumáttir	68	Weicon BR	67
Oregon PU PS Blá	11	Weiconlock 305-42	66
Oregon PU PS Reyð	11	Weiconlock 305-77	67
ORFS rørfittings	31		

TABLE OF CONTENTS IN ALPHABETICAL ORDER

Airhose PA	56	Hydraulic Tube Stainless 316AISI	78
Alfa Laval	54	Jamaica HD	14
Antistatic Fish Feeding Pipe	18	JIC fittings	30
Aquaflex	18	Luisiana superelastics	10
Aspiroil	16	Multi oil	16
Aspir PU/H	15	Oil mats	68
AT-44	64	Oregon PU PS Blue	11
Axilock IV NBR	71	Oregon PU PS RED	11
Bearings and transmissions	48	ORFS fittings	31
Black-Seal	65	Parker/Denison pumps	40
Boiler Treat Combi 25L	62	Parker pneumatic cylinders and valves	57
Boll & Kirch filter	37	Parker PTS (Tracking System)	27
Brake Cleaner	64	Pedrollo pumps	44
BSP fittings	30	Pneumatic fittings	56
Butterfly valves	50	Power clamps	70
Camlock couplings	72	Primed steel	79
Cloths	68	Quick release coupling	23
Cyl knife valves	51	Racor filterhousing	35
Danfoss Orbit motors	40	Ragno Acqua	19
Elaflex compensators	51	Rexroth pumps	41
Elektro Cleaner	65	Rust remover	62
Ermeto fittings	30	Rust remover and contact spray	64
Filter housings	35	Samson Pumps	46
Filter housings (water)	35	Separ filterhousing SWK2000/18/U Duplex	34
Filter mats	37	Separ filterhousing SWK2000/40/U Duplex	34
Filters	36	Seperator Disc Cleaner 25L	62
Fish Hose Fittings	23	Shark Hose	13
Fish Pump Hoses	22	Shieldmaster	28
Flex 310 Super-Tack	66	Stainless steel tubes for threading	79
Flex 310 White	66	Stainless threaded fittings	74
Flexfab cooling water hose	15	Superflex PU R	12
Fot Sludge Disperant 25L	61	Superjet high-pressure water hose	17
Gear pumps	41	Swivel joints	32
GEA Westfalia	54	Swivel joints 90°	32
Grundfos pumps	45	Tank Clean Alkaline 25L	60
Hose bend	23	Tank Clean Alkaline Extra 25L	60
Hose clamp	23	Thread rod	78
Hose Clamps	70	Tube clamps	70
Hose connector	23	VA-100 Glue	65
Hose fittings	31	Valve Treat 25L	61
Hose holder, stainless	24	Waterhose 1200	17
Hose reduction	23	Weicon BR	67
Hose swivel	24	Weiconlock 305-42	66
Hydraulic hose 462ST	26	Weiconlock 305-77	67
Hydraulic hose 797ST	26	Welding fittings	75
Hydraulic tube	78		

This image shows a single sheet of white paper with horizontal blue ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.[illegible]


This image shows a single sheet of white paper with horizontal blue ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.[illegible]

[illegible]A large grid of graph paper with 20 columns and 15 rows. The grid is composed of small squares, with a slightly larger margin at the top for writing.

This image shows a single sheet of white paper with horizontal blue ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.[illegible]

There is always room for improvement!

Winches and deck equipment especially made for large catches. Multidrive solutions ensure dynamic performance and redundancy. Our proven technology, reduced weight, and footprint comined with efficiency ensures reduced fuel consumptions and use of valuable deck space.


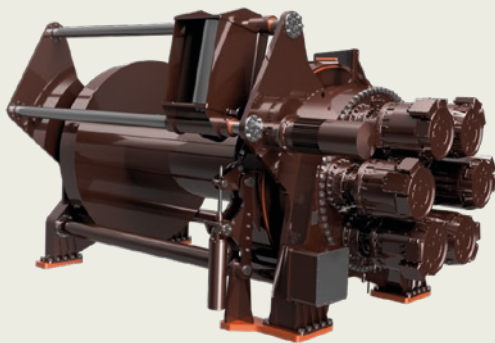


Trawl winch

- Robust multidrive
- Dynamic performance
- Redundant
- Market leading efficiency

Net winch

- Improved tension control and mooring functionality
- Robust multidrive
- Redundant

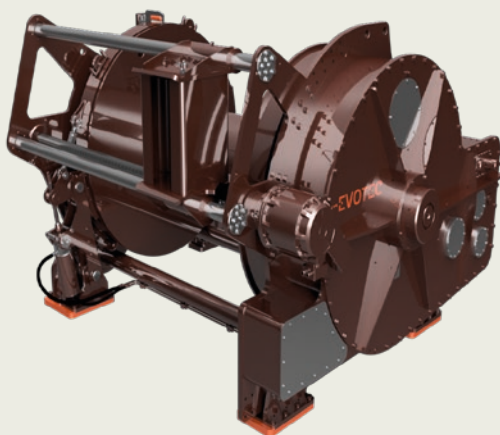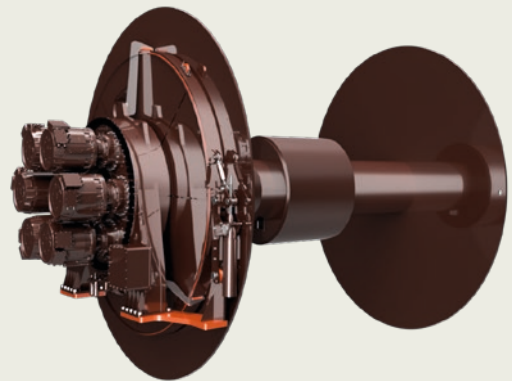

Purse seine winch

- Ultrasmooth deployment
- Recovers and reuses energy
- Improved control in harsh conditions
- Compact design

•
Making the seven seas
your playground



Evotec Control System

- More and more systems require even more focus on rapid and reliable control.



Evotec Autotrawl

- Developed in close cooperation with experienced fishing operators all over the world.
- System prepared for solutions up to 7 trawl winches.

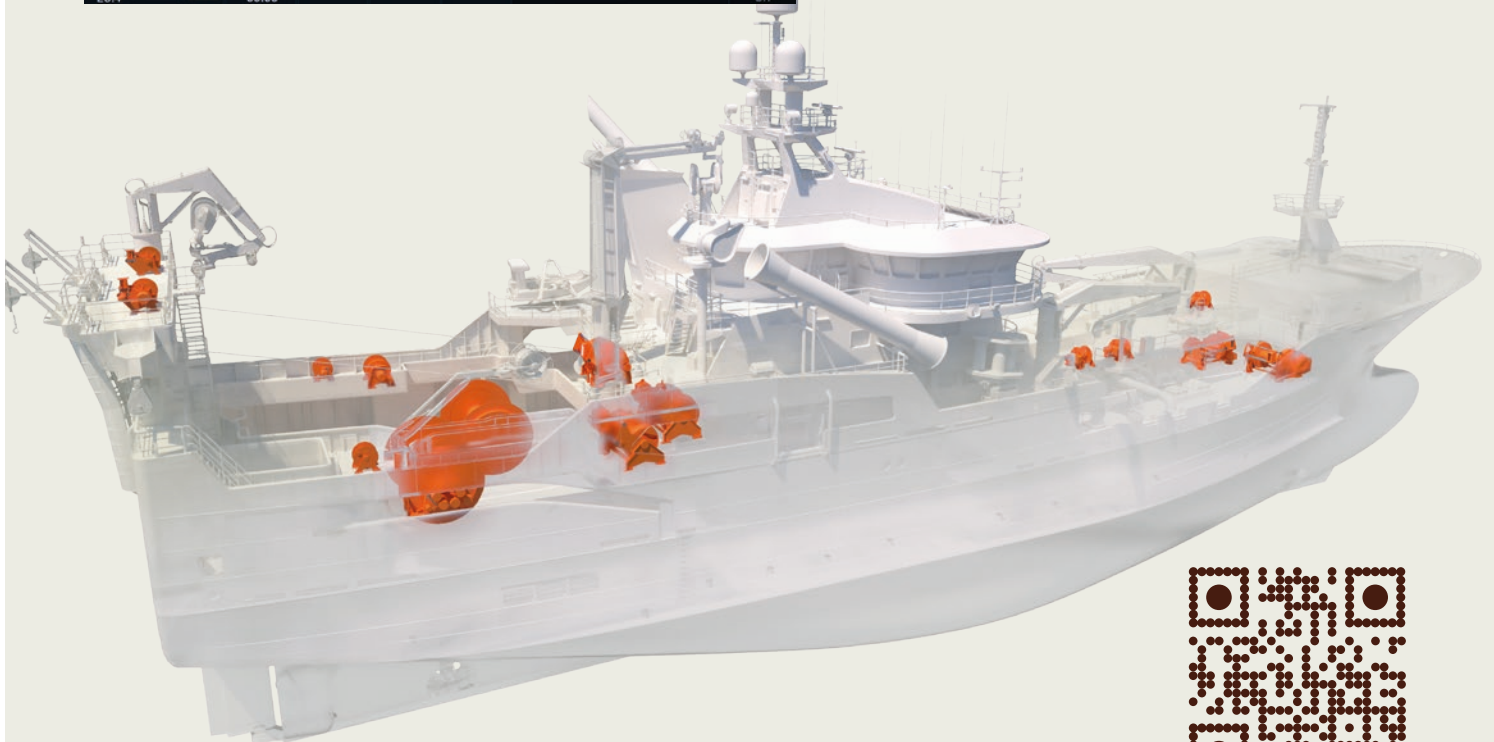

- Making the seven seas your playground

Deck Cranes

Storm philosophy is to build reliable, robust and strong performing cranes through smart and innovative design and quality fabrication.

Knuckle Boom Cranes

Standard or custom design with robust construction for long time use and minimal maintenance.

Range: **7m to 30m**

Hauling power: **1T to 15T**



Single Boom Cranes

Deck cranes available in a wide range. Standard or custom design with robust construction for long time use and minimal maintenance.

Range: **7m to 30m**

Hauling power: **1T to 15T**

Hose Handling Cranes

Cranes specially designed for Hose handling on Livefish Carries.

Range: **12m to 20m**

SWL (Hose winches): **1T to 2T**

SWL (Main winch): **5T to 8T**



Net Handling Equipment

Storm offers a wide range of standard products and specific products at customer request.

Net Cranes

Standard design with robust construction. Can be delivered with arm lengths to fit different size of vessels.


Hauling power (Roller unit): **3000kp to 5000kp**
SWL (Winch): **2.5T to 6T**



Nethaulers

Standard design with robust construction. Delivered with hydraulic or electrical drive.

Hauling power: **15T to 30T**

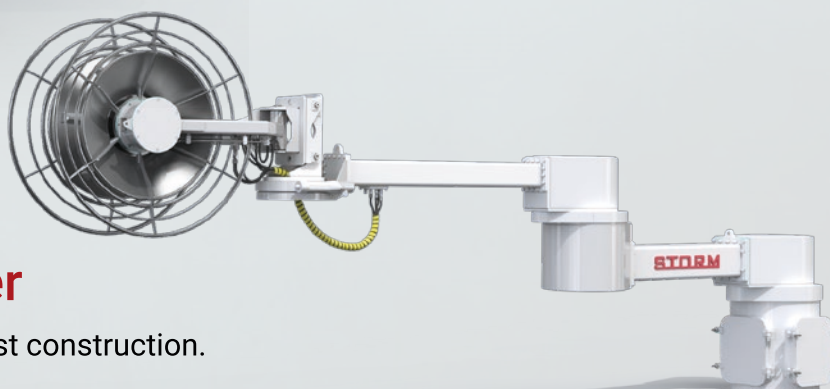


Corkline Stacker

Standard design with robust construction.


Range: **5m to 8m**
Hauling power: **3000N**

CRITICAL POWER

1 MWe Generator with Yanmar Engine

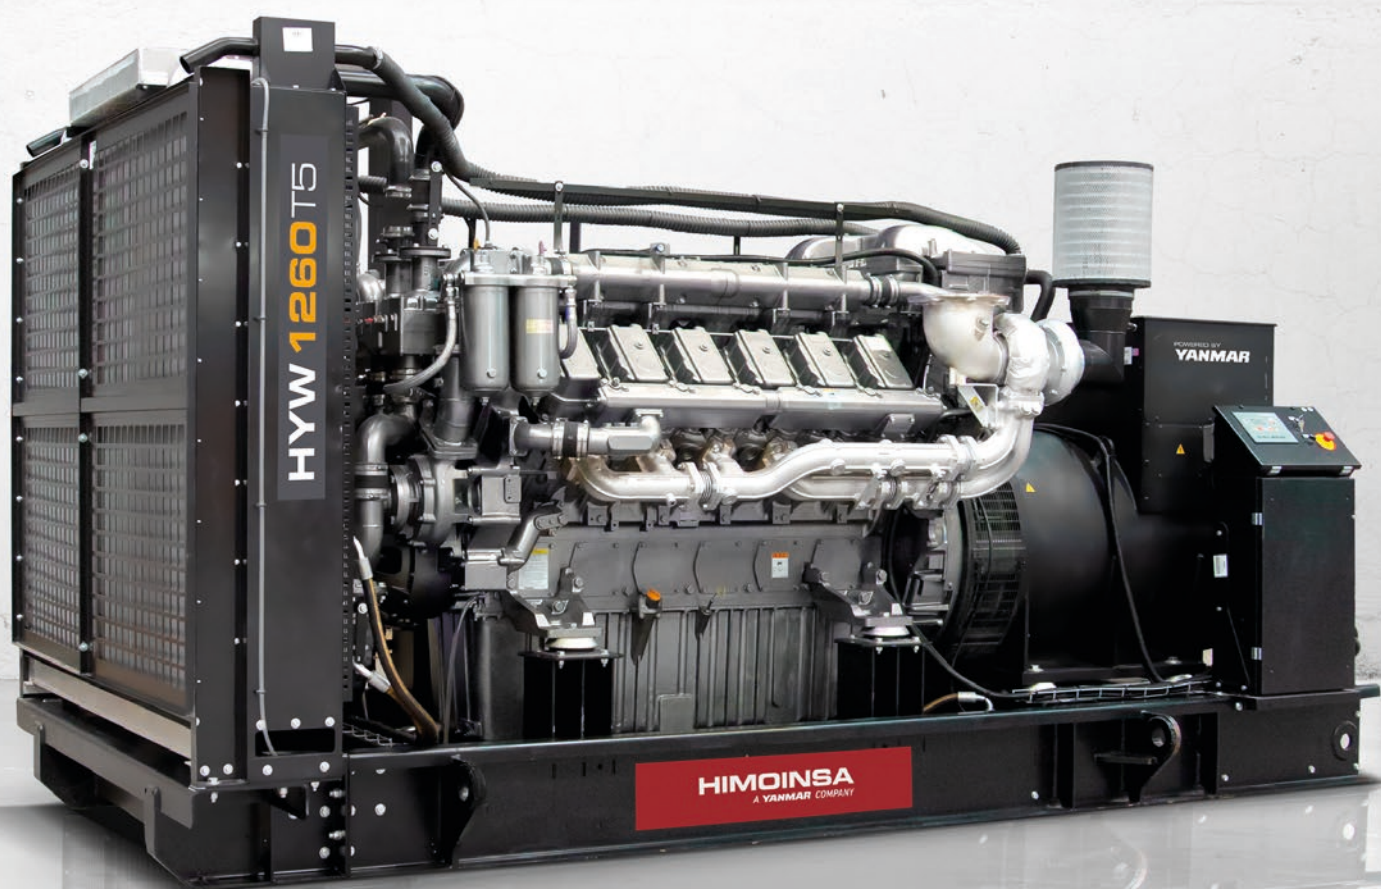

Tel: +298 407000
sales@kj.fo



YANMAR
ENGINE

Efficiency & Reliability

HIMOINSA
A YANMAR COMPANY

DIESEL & GAS GENERATORS



On-Site Power

We not only offer
QUALITY PRODUCT
But also
ENGINEERING
SOLUTIONS

Tel: +298 407000
sales@kj.fo

HIMOINSA
A YANMAR COMPANY



AQUACULTURE SEGMENT

ELEVATING YOUR AQUACULTURE OPERATIONS



FOLDABLE KNUCKLE BOOM CRANES

/// Their sophisticated crane geometry and compact construction make PALFINGER MARINE foldable knuckle boom cranes a convenient, multi-functional tool for effortless loading and unloading of equipment – especially in confined working areas. They can be customized to meet offshore rules and regulations and come with a variety of options and additional features.

EFFICIENT AND RELIABLE LIFTING SOLUTIONS

Based on many years of experience, PALFINGER has developed a range of cranes that meet the lifting requirements of the aquaculture industry. Typical applications include service vessels, workboats, barges and live fish carriers.

Having delivered more than 2,500 cranes to the industry worldwide, PALFINGER is the preferred supplier for the tried and trusted marine cranes like foldable knuckle boom cranes, telescopic boom cranes, knuckle boom cranes and stiff boom cranes.

PALFINGER cranes offer a compact construction and low weight. Thanks to standardized components and intuitive operation, installation and integration are seamless, requiring minimal downtime. Central Remote Control enables the operator to control each crane separately using two joysticks, directly from the bridge.



TELESCOPIC KNUCKLE BOOM CRANES

/// PALFINGER's telescopic knuckle boom cranes are designed specifically for heavy lifting with a wide outreach requirement, and they offer the advantage of requiring minimal deck space despite their high power output.



TELESCOPIC BOOM CRANES

/// PALFINGER's telescopic boom cranes are based on a pedestal slewing design with hydraulic cylinder luffing. The boom extension is a telescopic inner section that enables a more flexible and wider operational radius and leaves the crane stored in a compact position. Their low weight and less complex design make them particularly maintenance-friendly. One of the optionally available features is a multiple winch system. This makes efficient, flexible and precise handling of multiple lifting and positioning tasks possible.


Tel: +298 407000
sales@kj.fo

PALFINGERMARINE.COM

STEVI®


Expert Control

INDIVIDUAL. PRECISE. DURABLE

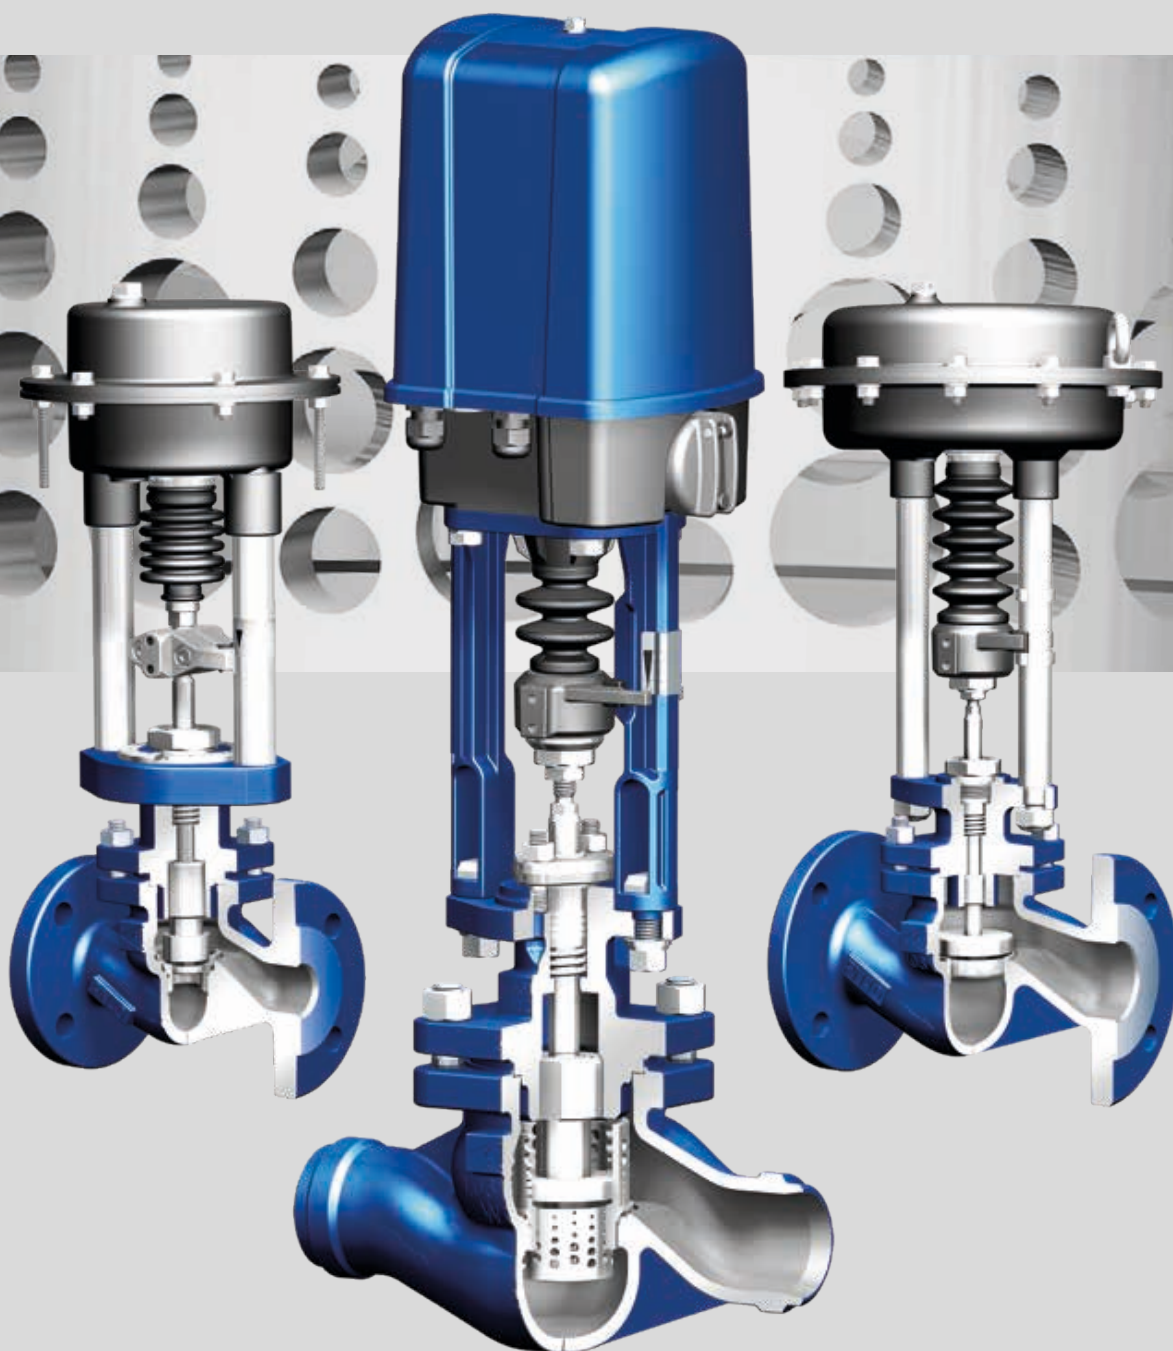

Tel: +298 407000 | sales@kj.fo



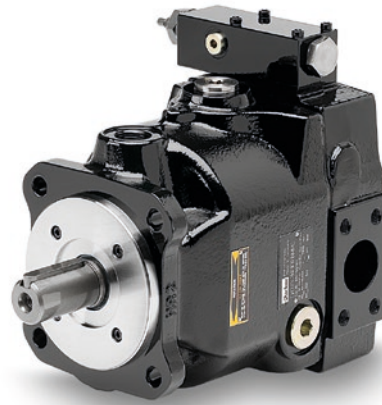

Parker Distributor
 Tel: +298 407000
 sales@kj.fo

Your needs . . .

BETA MARINE

Seagoing

Saildrives

Inland Waterways

Marine Generating Sets

Spares & Support



- 36 years of customer centred focus, listening to needs & delivering long term value solutions.
- Specialists in customer advice & support at all points of a products voyage.
- Superb after-sales service via our approved national & international re-engine centres and authorised dealer network.
- Extensive range of 10 to 98 HP heat exchange propulsion engines with mechanical or hydraulic gearboxes.
- Optional secondary domestic 12V alternator or 3.5/5.0 kVA travel power.
- A range of 14 to 56 HP heat exchange propulsion engines with 2 saildrive solution options.
- Heat exchange Generating Sets 4 to 58 kVA with or without super silent acoustic housings.
- 5 year self-service warranty*.

. . . our tailored solutions delivering reliability and peace of mind

*Recreational use, terms & conditions apply.

Beta Marine

Tel: +298 407000

sales@kj.fo

Your needs . . .

BETA MARINE

Seagoing

Saildrives

Inland Waterways

Marine Generating Sets

Spares & Support


Marine Generating Sets to 650 kVA

- Powered by: Beta Kubota, Baudouin, Cummins, Perkins or Scania marine diesel engines - heat exchanger, keel or radiator cooling.
- Acoustic housings designed to customer specifications.
- Manufactured to Classification Society requirements: Lloyds Register, Det Norske Veritas, Bureau Veritas, Germanischer Lloyd, ABS, CCS, etc.



Marine Propulsion Engines 10 to 150 HP

- Built to your specification from our extensive menu of options.
- Optional bespoke CAD design and fabrication of installation feet.
- Factory engine installation service for your net or pot hauler hydraulic pump.
- Superb installation support and after sales service from our comprehensive national and international network.

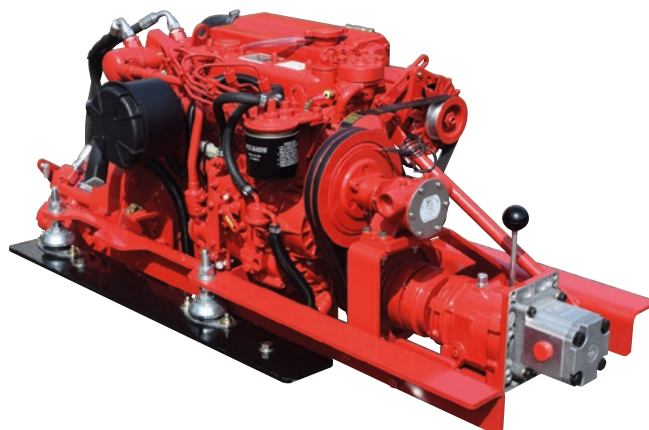

. . . our tailored solutions delivering reliability and peace of mind



www.betamarine.co.uk



kj.fo

sales@kj.fo
+298 40 70 00